


**Technical Specification**

**Product Code:** GM2017PWBS

**Description:** 20A Flex Outlet Module

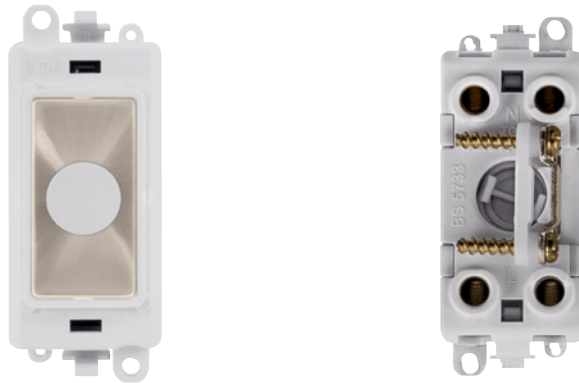

**General Information**

<b>Dimensions</b>	24.5mm (W) x 50mm (H) x 28mm (D)
<b>Aperture Dimensions</b>	20mm (W) x 35mm (H)
<b>Module Frame Finish</b>	Polar White
<b>Module Finish</b>	Brushed Stainless
<b>Materials</b>	Body & Insert: Nylon Insert Cover: Stainless Steel Terminals: Brass Terminal Screws: Steel & Yellow Passivated
<b>Maximum Voltage</b>	250V 50Hz
<b>Load Rating</b>	20A
<b>Terminal Size</b>	5mmø
<b>Terminal Torque</b>	1.2Nm
<b>Terminal Capacity</b>	3 x 2.5mm <sup>2</sup> or 1 x 4mm <sup>2</sup>
<b>Flex Outlet</b>	Yes (10mmø Through Front of the Module)
<b>Back Box Depth</b>	Dependent On Plate Used
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	BS 5733: 2010

**Additional Information**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

UK Design Registration: 3015621