


# Technical Specification

Product Code: MD017WHSC

Description: 20A Ingot Flex Outlet Module

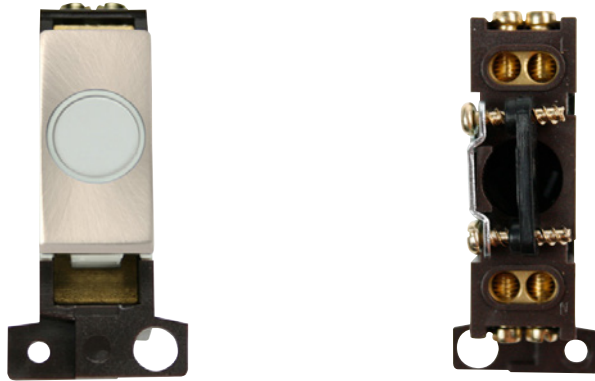

## General Information

<b>Dimensions</b>	25mm (W) x 56.5mm (H) x 30mm (D)
<b>Aperture Dimensions</b>	32mm (W) x 31.5mm (H)
<b>Finish</b>	Satin Chrome
<b>Flex Outlet</b>	Click White
<b>Materials</b>	Blank: Urea Rear Housing: Nylon Cover: Stainless Steel Terminals: Brass Terminal Screws: Steel & Yellow Passivated Bracket: Mild Steel Cord Grip: Nylon Screws: Nickel Plated Steel
<b>Maximum Voltage</b>	250V 50Hz
<b>Load Rating</b>	20A
<b>Terminal Size</b>	3.5mm $\varnothing$
<b>Terminal Torque</b>	0.4Nm
<b>Terminal Capacity</b>	4 x 1.5mm <sup>2</sup> or 2 x 2.5mm <sup>2</sup>
<b>Flex Outlet</b>	Yes (10mm $\varnothing$ Through Front of the Module)
<b>Back Box Depth</b>	Dependent On Plate Used
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	10 Years
<b>Standards</b>	BS 5733: 2010

## Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

UK Design Registration: 3015621