


Product Code: PRW050

Description: 13A Fused Connection Unit With Optional Flex Outlet

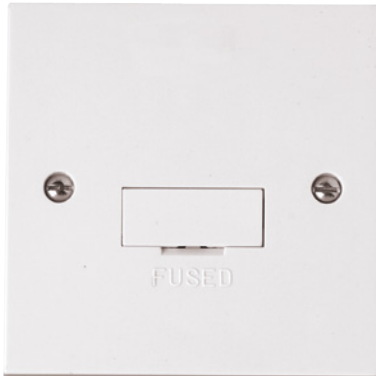

Representative Image

**General Information**

<b>Dimensions</b>	86mm (W) x 86mm (H) x 11mm (D)
<b>Plate Design &amp; Finish</b>	Square Edge Polar White
<b>Materials</b>	Front Plate & Fuse Drawer: Urea Rear Housing: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel
<b>Maximum Voltage</b>	250V~ 50Hz
<b>Load Rating</b>	13A
<b>Plate Fixing Centres</b>	60.3mm
<b>Terminal Size</b>	5mmø
<b>Terminal Torque</b>	2.5Nm
<b>Terminal Capacity</b>	4 x 2.5mm <sup>2</sup> or 2 x 4mm <sup>2</sup>
<b>Switched</b>	No
<b>Twin Earth Terminals</b>	Yes
<b>Fuse Fitted</b>	13A (BS 1362)
<b>Flex Outlet</b>	Yes (10mmø Through Bottom of the Plate)
<b>Ingress Protection</b>	IP20
<b>Back Box Depth</b>	25mm Minimum
<b>Operational Temperature</b>	-5°C to +40°C
<b>Warranty</b>	20 Years
<b>Standards</b>	BS 1363-4: 2016 +A1: 2018 BS 1362:1973

**Additional Information**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.  
All products have been independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.