


Product Code: CT2300

Description: 250V 20A 4 Pole Switch Adaptor

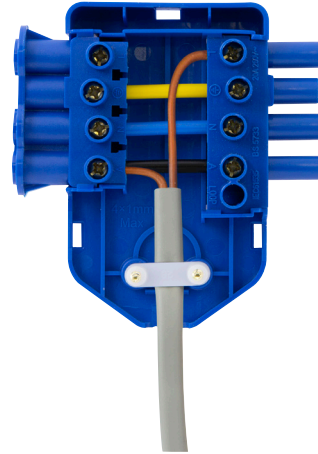

General Information

Dimensions	89mm (W) x 85mm (D) x 24mm (H)
Material Composition	Cover: Polycarbonate Base & Terminal Housing: Nylon (PA66) Terminals: Silver Plated Brass Terminal Screws: Steel and Yellow Passivated
Maximum Voltage	250V~ 50Hz
Load Rating	20A
Terminal Capacity	3 x 2.5mm ² Max. T&E, 3 x 1.5mm ² Max. Flex
Ingress Protection	IP20
Operational Temperature	-5°C to +40°C
Warranty	10 Years

Pre-wired Links 2.50mm² (Permanent Live, Earth & Neutral)

Standards BS 8488 : 2009+ A1 :2010
EN 61535: 2009 + A1: 2013
BS 5733: 2010 + A1: 2014



Additional Information

Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Pre-fabricating wiring systems manufactured to BS 8488 by other manufacturers may not be compatible or safely inter-connectable with this system. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.