


Product Code: PRW215

Description: 45A 1 Gang Cooker Connection Plate

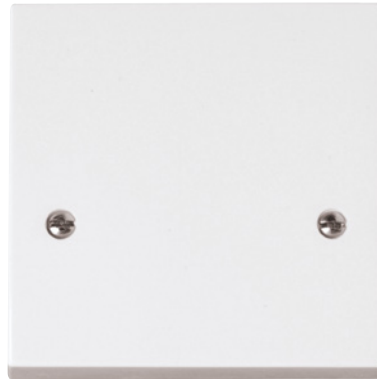

General Information

| | |
|--------------------------------|--|
| Dimensions | 86mm (W) x 86mm (H) x 22.5mm (D) |
| Finish | Polar White |
| Materials | Front Plate: Urea Earthing Yoke: Mild Steel Terminal Housing: Urea Terminals: Brass Terminal Screws: Steel & Yellow Passivated |
| Maximum Voltage | 250V~ 50Hz |
| Load Rating | 45A |
| Plate Fixing Centres | 60.3mm |
| Terminal Size | 4.6mm Entry |
| Terminal Torque | 0.8Nm |
| Terminal Capacity | 2 x 10mm ² |
| Flex Outlet | Yes (20mm x 21mm) |
| Ingress Protection | IP20 |
| Back Box Depth | 35mm Minimum |
| Operational Temperature | -5°C to +40°C |
| Warranty | 20 Years |
| Standards | BS 5733: 2010 |

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases.
 All products have been independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.