

Product Code: SIN019BK

Technical Specification

Description: 10AX 4 Gang 2 Way Plate Switch Insert





General Information

Dimensions 142.5mm (W) x 82.5mm (H) x 2.5mm (D)

Insert Finish Black Insert & Switches

Cover Plate Finishes Available BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black) & PW (Polar

White)

Materials Insert: Polycarbonate

Rear Housing: Nylon Terminals: Brass

Terminal Screws: Steel & Yellow Passivated Contacts: Silver "on-lay" Copper / Brass Internal Busbars: Formed Pressed Brass

Earth Strap: Mild Steel

Maximum Voltage 250V∼ 50Hz

Load Rating 10AX (Suitable for Inductive Loads)

Plate Fixing Centres 120.6mm
Terminal Size 3.5mmø
Terminal Torque 0.5Nm

Terminal Capacity 4 x 1.5mm² or 2 x 2.5mm²

Two Way Yes
Ingress Protection IP20

Back Box Depth 25mm Minimum

Termination Type Screw

Operational Temperature -5°C to +40°C

Warranty 10 Years

Standards BS EN 60669-1:1999 +A1:2002 +A2:2008

Additional Information Ensure that the mains supply is isolated before commencing installation and refer to the circuit

diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range.







Technical Specification



Product Code: SIN019BK Description: 10AX 4 Gang 2 Way Plate Switch Insert


Compatible Cover Plates

Plate Dimensions 146mm (W) x 86mm (H) x 4mm (D)


Cover Plate Finishes Available BS (Brushed Stainless), CH (Polished Chrome), SS (Stainless Steel), BK (Matt Black) & PW (Polar

White)

Materials: Decorative: Stainless Steel, Black & Polar White: Polycarbonate

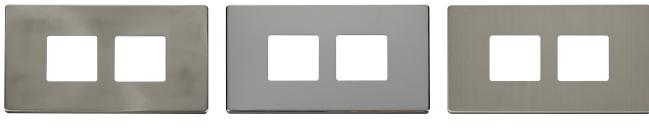

SCP404BS SCP404CH SCP404SS

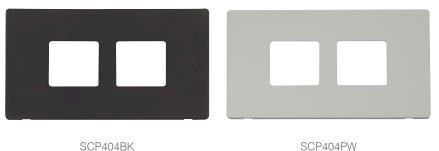

SCP404P