


# Copper Tube Lugs – 1A

## T Range 99.9% PURE COPPER

The Termination Technology range of standard copper tube terminals is manufactured from seamless copper tube to BS2871/C106.

All terminals are provided with an inspection hole to ensure the conductor is fully inserted before crimping. A bell mouth also ensures a smooth transition from lug to cable, thus avoiding the problems of chafing where the component is subject to vibration. The internal barrel diameters suit standard cables as defined in BS6360.

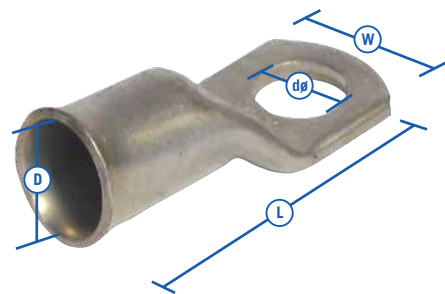

All Termination Technology terminals fully comply with BS EN 61238-1-2003 & IEC 61238-2003.

Part No.	Conductor Size mm <sup>2</sup>	Stud mm	Length L	Width W	Inside Dia D	Hole Dia dg
T1.5-3	1.5	3	17.0	5.5	1.8	3.2
T1.5-4	1.5	4	19.5	8.0	1.9	4.3
T1.5-5	1.5	5	20.4	8.0	1.9	5.3
T2.5-3	2.5	3	18.0	5.5	2.4	3.2
T2.5-4	2.5	4	19.0	7.7	2.4	4.3
T2.5-5	2.5	5	21.2	10.0	2.4	5.3
T2.5-6	2.5	6	21.0	10.0	2.4	6.5
T4-4	4.0	4	21.0	10.0	3.0	4.3
T4-5	4.0	5	22.0	10.0	3.0	5.3
T4-6	4.0	6	23.5	10.0	3.0	6.5
T6-4	6.0	4	21.5	10.0	3.8	4.3
T6-5	6.0	5	24.5	10.0	3.8	5.3
T6-6	6.0	6	24.5	10.0	3.8	6.3
T6-8	6.0	8	27.0	12.0	3.8	8.3
T6-10	6.0	10	29.0	15.0	3.8	10.3
T6-BL	6.0	-	29.0	12.5	4.1	-
T10-5	10	5	26.0	11.0	4.4	5.1
T10-6	10	6	26.0	11.0	4.4	6.3
T10-8	10	8	29.5	16.0	4.4	8.2
T10-10	10	10	39.0	16.0	4.4	10.4
T10-12	10	12	39.0	18.0	4.4	12.7
T10-BL	10	-	39.0	18.0	4.4	-
T16-5	16	5	30.0	11.5	5.6	5.2
T16-6	16	6	30.0	11.5	5.6	6.3
T16-8	16	8	30.0	14.0	5.6	8.3
T16-10	16	10	35.5	18.0	5.6	10.3
T16-12	16	-	42.0	18.0	5.6	-
T25-5	25	5	32.5	13.8	7.0	5.2
T25-6	25	6	32.5	13.8	7.0	6.3
T25-8	25	8	32.5	13.8	7.0	8.2
T25-10	25	10	38.0	16.0	7.0	10.2
T25-12	25	12	38.0	18.0	7.0	12.8
T25-BL	25	-	38.0	16.0	7.0	-
T35-5	35	5	35.0	15.3	8.2	5.2
T35-6	35	6	35.0	15.3	8.2	6.3
T35-8	35	8	35.0	15.3	8.2	8.3
T35-10	35	10	40.5	15.3	8.2	10.3
T35-12	35	12	40.5	18.0	8.2	12.9
T35-14	35	14	40.5	19.6	8.2	14.8
T35-BL	35	-	40.5	18.0	8.2	-

Part No.	Conductor Size mm <sup>2</sup>	Stud mm	Length L	Width W	Inside Dia D	Hole Dia d $\phi$
T50-6	50	6	37.0	17.4	9.5	6.3
T50-8	50	8	37.0	17.4	9.5	8.3
T50-10	50	10	42.5	17.4	9.5	10.3
T50-12	50	12	42.5	17.4	9.5	12.8
T50-14	50	14	42.5	20.3	9.5	14.8
T50-16	50	16	52.8	23.2	9.5	16.5
T50-BL	50	-	42.5	17.4	9.5	-
T70-6	70	6	40.5	20.9	11.5	6.3
T70-8	70	8	40.5	20.9	11.5	8.2
T70-10	70	10	46.0	20.9	11.5	10.2
T70-12	70	12	46.0	20.9	11.5	12.7
T70-14	70	14	55.0	20.9	11.5	14.8
T70-16	70	16	55.0	20.9	11.5	16.3
T70-20	70	20	71.9	30.0	11.5	20.9
T70-BL	70	-	50.0	20.9	11.5	-
T95-6	95	6	49.5	24.3	13.5	6.3
T95-8	95	8	49.5	24.3	13.5	8.3
T95-10	95	10	49.5	24.3	13.5	10.3
T95-12	95	12	49.5	24.3	13.5	12.7
T95-14	95	14	56.0	24.3	13.5	14.8
T95-16	95	16	56.0	24.3	13.5	16.3
T95-20	95	20	73.6	30.0	13.5	20.9
T95-BL	95	-	56.0	24.3	13.5	-
T120-8	120	8	55.5	27.3	15.0	8.3
T120-10	120	10	55.5	27.3	15.0	10.3
T120-12	120	12	55.5	27.3	15.0	12.7
T120-14	120	14	55.5	27.3	15.0	14.8
T120-16	120	16	60.0	27.3	15.0	16.3
T120-20	120	20	76.6	30.0	15.0	20.9
T120-BL	120	-	55.5	27.3	15.0	-
T150-8	150	8	61.0	30.2	16.5	8.3
T150-10	150	10	61.0	30.2	16.5	10.2
T150-12	150	12	61.0	30.2	16.5	12.7
T150-14	150	14	61.0	30.2	16.5	14.7
T150-16	150	16	65.0	30.2	16.5	16.2
T150-20	150	20	65.0	30.2	16.5	20.8
T150-BL	150	-	65.0	30.2	16.5	-
T185-10	185	10	66.5	33.3	18.5	10.3
T185-12	185	12	68.0	33.3	18.5	12.9
T185-14	185	14	68.0	33.3	18.5	14.7
T185-16	185	16	70.0	33.3	18.5	16.5
T185-20	185	20	70.0	33.3	18.5	20.9
T185-BL	185	-	70.0	33.3	18.5	-
T240-10	240	10	88.0	37.7	21.0	10.3
T240-12	240	12	88.0	37.7	21.0	12.7
T240-14	240	14	88.0	37.7	21.0	14.7
T240-16	240	16	88.0	37.7	21.0	16.4
T240-20	240	20	88.0	37.7	21.0	20.9
T240-BL	240	-	88.0	37.7	21.0	-
T300-10	300	10	97.0	41.0	23.0	10.3
T300-12	300	12	97.0	41.0	23.0	12.7
T300-14	300	14	97.0	41.0	23.0	14.7
T300-16	300	16	97.0	41.0	23.0	16.4
T300-20	300	20	97.0	41.0	23.0	20.9
T300-BL	300	-	97.0	41.0	23.0	-