

Push Fit Terminal Block for
Faster, **TOOL FREE** Installation

30
MIN

60
MIN

90
MIN



AIR LEAKAGE
(excluding
adjustable)


Fire Rated Downlights



Connector with push fit
loop in/loop out terminals
suitable for use with solid
or stranded cable

Insulation coverable 300mm fibre based

- No accessory required
- No insulation cut-out required

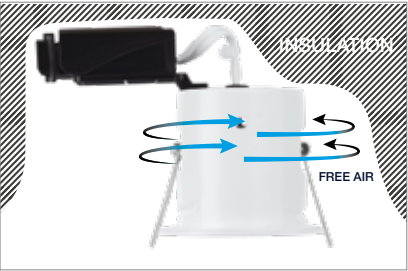

Twist&LockTM

Fixed, Adjustable & IP Rated Bezels

5 Year Warranty

White, Matt White, Polished
Chrome & Satin Nickel
bezel finish options



works with


.light

Smart
Tuneable GU10
See pg.27



.control



Dimmable
Standard GU10
PLUS
Triac Inline Dimmer
See pg.41



OR
Smart Rotary Dimmer
See pg.35



Non-Dimmable
Standard GU10
PLUS
On/Off Relay
See pg.47

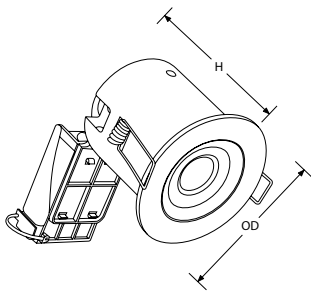

EN-DLM981X
(H) 107mm Height
(OD) 90mm Overall (Ø)
EN-DLM982X
(H) 120mm Height
(OD) 102mm Overall (Ø)

EFDTM PRO

GU10 Professional Fixed/Adjustable Fire Rated Downlights

make smart with



See pg.256-258 for compatibility table

Interchangeable bezels for fixed version use EN-DLM981X & EN-BZ91

Interchangeable bezels for adjustable version use EN-DLM982X & EN-BZ92

Interchangeable bezels for IP65 rated version use EN-DLM981X & EN-BZ93

Fitted with push-fit terminal block for faster installation

Fibre based insulation coverable - up to 300mm (LED lamps only)

Tested in 30, 60 and 90 minute solid timber joist fire rated ceilings†

Smart
Lamp options
See pg.27



Standard
Lamp options
See pg.113



See luminaire lamp compatibility on pg.259



Fixed



Adjustable



Fixed IP65



AIR leakage
(excluding
adjustable)

Cat. No.	Input	Horz. Adj.	Cutout (Ø)
Fixed/IP65			
EN-DLM981X	240V	-	75mm
Adjustable			
EN-DLM982X	240V	20°	85mm
Bezels			
EN-BZ91*	EFD TM PRO 90mm Fixed Aluminium Downlight Bezel		
EN-BZ92*	EFD TM PRO 102mm Adjustable Aluminium Downlight Bezel		
EN-BZ93*	EFD TM PRO 90mm IP65 Aluminium Downlight Bezel		

*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.
Lamp not included

†Suitable for use in 30 minute i-joist fire rated ceilings. See pg.262



Fire Rated Downlights