

# DOWNLIGHTS

## TRIUMPH ACTIVATE™ LED FIRE RATED



### TRIUMPH ACTIVATE™ LEDCHROIC DOWNLIGHT

- True ACTivate Driver-On-Board (DOB) mains operated technology – providing dimmability, driver efficiency and reliability (no electrolytic capacitor)
- Pre-wired with ROBUS SWIFT 4 pin male/female plug & play connector with large terminals and integrated cable restraint
- Chip-On-Board (COB) for superb light output, high efficiency and long life
- Efficacy of  $\geq 83$  luminaire lm/cctW to comply with Part L1 & L2 UK Building Regulations
- Interchangeable LEDCHROIC lens system achieving unequalled light distribution, uniformity and clarity
- Interchangeable trim bezel system allows fitting of six accessory trim colours – allows fitting of 60° lens accessory
- Fire, acoustic and airflow tested in compliance with Parts B, C & E of UK Building Regulations

### CONVERSIONS AVAILABLE





### ACCESSORIES

RATRTRIM-02	Brass Trim
RATRTRIM-03	Chrome Trim
RATRTRIM-10	Matte Black Trim
RATRTRIM-11	Matte White Trim
RATRTRIM-13	Brushed Chrome Trim
RATRTRIM-14	Antique Brass Trim
RATRENS60	60 deg LEDCHROIC™ LENS for 6W & 8W
RLA400DT	LOADPRO 3W Min to 150W Max LED Dimmer
RTED/4/TP60/240WC	Plug & Play Emergency Pack
RATRENS38	60 deg LEDCHROIC™ LENS for 11W

### DIMENSIONS (mm)

Model	Diameter	Depth	Cut-out
RATR6P03038-01	91.5	63	70
RATR8P03038-01	91.5	98	70
RATR0113060-01	91.5	100	70
RATR0114060-01	91.5	100	70

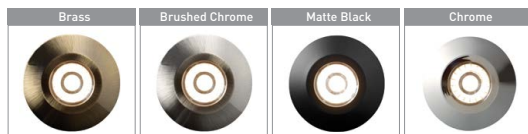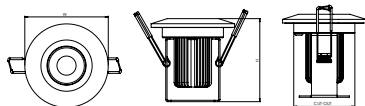

# DOWNLIGHTS

## TRIUMPH ACTIVATE™ LED FIRE RATED



Warm White			
	6W	8W	11W
Standard	<b>RATR6P03038-01</b>	<b>RATR8P03038-01</b>	<b>RATR0113060-01</b>
No Connector	<b>RATR6P03038NC-01</b>		
<b>Comparable to:</b>	50W Halogen	18W PL	26W PL
<b>Total Power (W):</b>	5.6	7.6	10.7
<b>Total Light Output (lm):</b>	530	670	1,000
<b>Efficacy (lm/cctW):</b>	95	89	94
<b>Lifetime (hrs):</b>	50,000	50,000	50,000
<b>Lux at 1m (lux):</b>	880	1,230	1,020
<b>Beam Angle (deg):</b>	38	38	60
<b>CCT (K):</b>	3000	3000	3000
<b>CRI (Ra):</b>	80	80	80
<b>Power Factor (PF):</b>	>0.9	>0.9	>0.98
<b>Min Order/Carton Qty:</b>	1/18	1/18	1/18
<b>Weight (kg):</b>	0.27	0.32	0.41

Neutral White			
	6W	8W	11W
Standard	<b>RATR6P04038-01</b>	<b>RATR8P04038-01</b>	<b>RATR0114060-01</b>
No Connector		<b>RATR6P04038NC-01</b>	
<b>Total Light Output (lm):</b>	530	730	1030
<b>Efficacy (lm/cctW):</b>	87	88	92
<b>Lux at 1m (lux):</b>	930	1,280	990
<b>CCT (K):</b>	4000	4000	4000



SEAI Approved

OP 220 240	IP 65	Zone 1	PART L1	PART L2	PHOTO METRICS
------------------	----------	-----------	------------	------------	------------------