

## NOVA LITTLE TOWEL RAIL



- Daily and Weekly Programming 24/7
- Boost Function - up to 90 mins
- Open Window Detection Function
- 3 different temperature modes: comfort, economy and anti-freeze
- Safety thermal cut-off and 1m connection cable
- IP44, Class I insulation electrical protection
- Available in white, chrome and black finish
- Guarantee, 10 years on the body, 2 years on the electronics

### Product Specification



Reference	Model	Power W	Height mm	Width mm	Weight Kg	Number of Tubes	Volts V	Current A
TNDL	NOVA Little White	400	800	500	10.5	16	230	1.8
TNDCRL	NOVA Little Chrome							
TNDNL	NOVA Little Black							

### Guarantee

Body	10 Years
Electronics	2 Years

### Towel Rail Material

Body	Stainless Steel, (colours available in White (RAL9016), Chrome and Black)
Vertical Tubes	Vertical tubes 30 x 40mm, 1.5mm thickness
Horizontal Tubes	Horizontal tubes Ø 22 x 1.2mm thickness
Controls	Electronic PID (Proportional Integral Derivative)

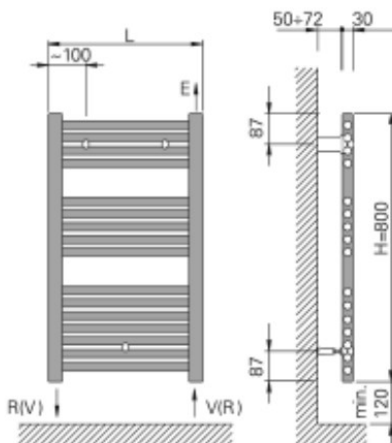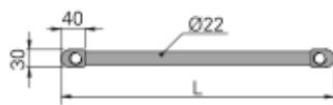

Nova Little Sizing Diagram

### Installation

Mounting	Wall
Direction	Vertical
Accessories (included)	Plug, Cable, Installation Kit, User Instructions

### Safety Information

Safety Heat Limiter	Yes
Overheat Protection	Yes
Operating Temperature	0°C to 50°C
Comfort Temperature	between 7° and 30°C (approximately)

### Certification

CE	Yes
RoHS	Yes
IP Rating	IP44
Protection Grade	Class I