



IC Rated up to 350mm insulation

[www.belllighting.co.uk](http://www.belllighting.co.uk)

# FirestayLED

CCT 3 way selectable colour switch

## Integrated LED Centre Tilt Downlight



The Centre Tilt version of our CCT Downlight has all the benefits of our fixed CCT Downlight, combined with the added functionality centre tilt lens. Colour selectable as standard with a 7 year guarantee.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- IP65
- Front CCT switch
- 6 in 1 Fixture, 3 colour temperatures, 2 bezels
- Includes satin & white magnetic bezels
- Part B/C/E compliant
- IC rated



**LMR80:** Maximum 20% of lumen depreciation over rated hours.

**B10:** Maximum 10% of fittings failure rate over rated hours

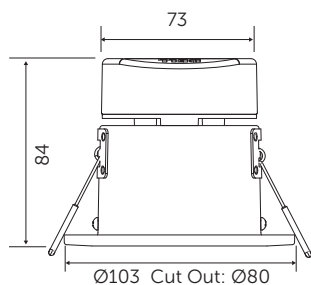

technical@bellighting.co.uk  
sales@bellighting.co.uk

# FirestayLED


CCT 3 way selectable colour switch

## Integrated LED Centre Tilt Downlight



200

The Firestay LED CCT has an easily accessible colour selectable switch located under the bezel on the front of the downlights. Simply move the switch to select your colour temperature option.

Selectable Colour Temperature



Simply move the switch located under the magnetic bezel to your desired colour temperature

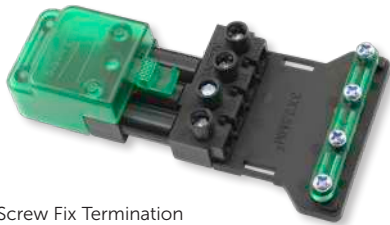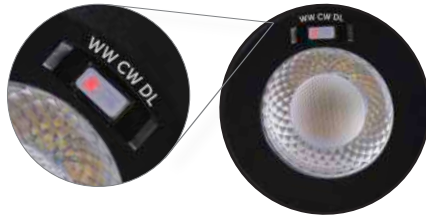

Screw Fix Termination

Technical Specification	
Construction	Die-Cast Aluminium
Driver	On Board
LED Chip	Epistar
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

Code	Description	Colour Temperature	Lm	Cd	Beam <sup>0</sup>	Hrs
08190	7W Firestay CCT 3 Way Selectable Colour Switch Center Tilt LED Downlight, Dimmable, Plug & Play, 40° Beam Angle. Screw Fix Termination	3/4/6000K	550-600	660	40°	50000
08200	Chrome Magnetic Bezel for above	-	-	-	-	-
08201	Brass Magnetic Bezel for above	-	-	-	-	-
08202	Antique Brass Magnetic Bezel for above	-	-	-	-	-
08203	Matt Black Magnetic Bezel for above	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlights	-	-	-	-	-
10803	Smart Universal LED Trailing/Leading Edge Dimmer Module	-	-	-	-	-

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

<sup>1</sup> Exceeds EU standard of 70 for Lumens Maintenance Ratio

<sup>2</sup> Exceeds EU standard of RA 80 for Colour Rendering Index

<sup>3</sup> Subject to terms & conditions (Contact Customer Service)