



IC Rated up to 350mm insulation

www.belllighting.co.uk

FirestayLED

Integrated LED Fixed Oversize Downlight


The Firestay LED Oversized Downlight does exactly what it says on the tin. The oversized bezel gives users the opportunity to 'make good' on large holes when switching from outdated CFL technology.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist ceiling systems (certification pending)
- IP65
- Part B/C/E compliant
- White bezel & magnetic satin bezel
- Part L compliant
- Easy Fit Magnetic Bezel



LMR80: Maximum 20% of lumen depreciation over rated hours.

B10: Maximum 10% of fittings failure rate over rated hours

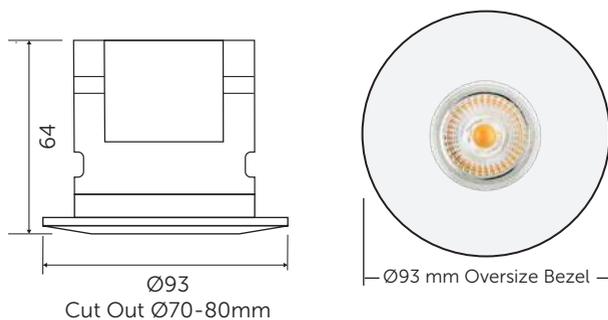

Quick Fix Connector
Tool Free Termination



technical@belllighting.co.uk
sales@belllighting.co.uk

Integrated LED Fixed Oversize Downlight

Technical Specification

Construction	Aluminium
Driver	BELL
LED Chip	Samsung
IP Rating	IP65
Operating Temp	-5°C to +35°C
Input Voltage	220 - 240V
Power Factor	> 0.9
CRI	85 - Exceeds EU standard of Ra 80 for Colour Rendering Index
LMR	80 - Exceeds EU standard of 70 for Lumens Maintenance Ratio

Code	Description	Colour Temp	Lm	Cd	Beam ⁰	Hrs
10515	6W Firestay LED Integrated Fixed Dimmable Downlight, incl White & Satin Oversize Bezels. Tool Free Termination	3000K	580	1050	40°	35000
10516	6W Firestay LED Integrated Fixed Dimmable Downlight, incl White & Satin Oversize Bezels. Tool Free Termination	4000K	595	1200	40°	35000
10517	6W Firestay LED Integrated Fixed Dimmable Downlight, incl White & Satin Oversize Bezels. Tool Free Termination	6000K	610	1150	40°	35000
10518	Chrome Magnetic Oversize Bezel for above					
10519	Brass Magnetic Oversize Bezel for above					
10803	Smart Universal LED Trailing/Leading Edge Dimmer Module	-	-	-	-	-
08196	Emergency Pack for Firestay LED Downlight					

Emergency versions must be tested in line with the requirements of BS5266, failure to do so may effect battery life and warranty.

¹ Exceeds EU standard of 70 for Lumens Maintenance Ratio

² Exceeds EU standard of RA 80 for Colour Rendering Index

³ Subject to terms & conditions (Contact Customer Service)

