
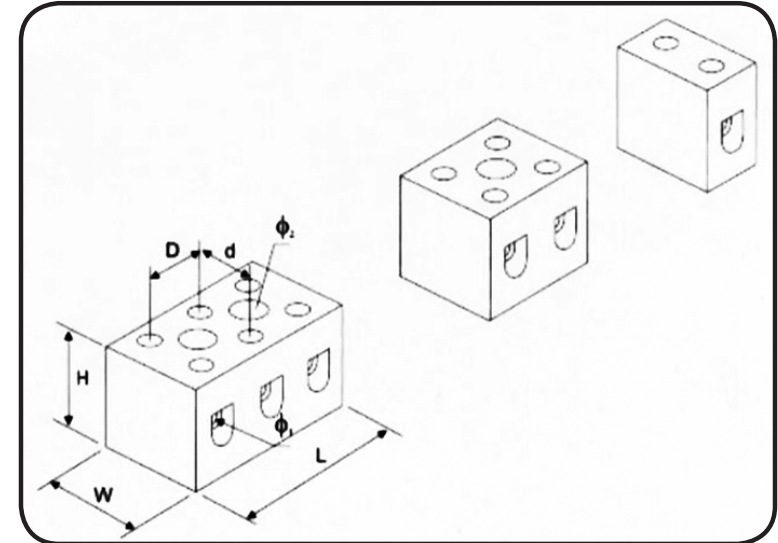


# Porcelain Connectors

## - Rated IP20

# NORSLO

- + Nickel plated Brass terminals
- + White ceramic body
- + Max temperature of operation: 350°C
- + Chemical resistant
- + Galvanised steel screws
- + 2, 3 & 4 Pole complete with central hole fixings
- + Non-flammable
- + Conforms to BS EN60998

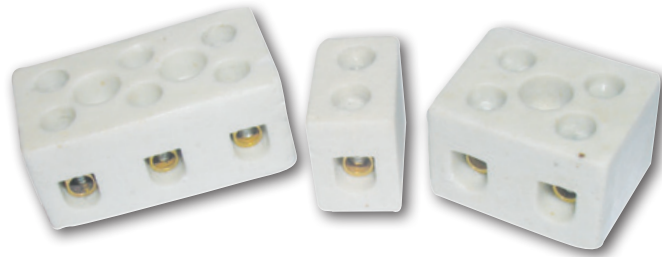

Part No	Dimensions (mm)						
	W	L	Ø1	Ø2	D	d	H
PC51	13	12	3.2	-	-	8	16
PCC52	18	21	3.2	4.5	12	8	16
PCC53	18	33	3.2	4.5	12	8	16
PCC152	21	24	4.3	4.8	14	10	20
PCC153	21	36	4.3	4.8	14	10	20
PCC154	21	49	4.3	4.9	13	10	20
PC301	27	15	6.1	-	-	12	22
PCC302	27	31	6.1	5.0	17	12	22
PCC303	27	48	6.1	5.0	17	12	22

# Porcelain Connectors

-Rated IP20

**NORSLO**

TECHNICAL DATA SHEET



	<b>PC51</b>	<b>PCC52</b>	<b>PCC53</b>	<b>PCC152</b>	<b>PCC153</b>	<b>PCC154</b>	<b>PC301</b>	<b>PCC302</b>	<b>PCC303</b>
<b>Description</b>	5A Porcelain Connector	5A Porcelain Connector	5A Porcelain Connector	15A Porcelain Connector	15A Porcelain Connector	15A Porcelain Connector	30A Porcelain Connector	30A Porcelain Connector	30A Porcelain Connector
<b>Pack Qty</b>	25	25	10	20	10	5	20	10	10
<b>Barcode</b>	5012739 622687	5012739 622748	5012739 622687	5012739 622755	5012739 622717	5012739 649011	5012739 622670	5012739 622724	5012739 622731
<b>Current Range</b>	5 - 32A			15 - 57A			30 - 76A		
<b>Rated Voltage</b>	450V								
<b>No of Poles</b>	1 Pole	2 Pole	3 Pole	2 Pole	3 Pole	4 Pole	1 Pole	2 Pole	3 Pole
<b>Fixing Holes</b>	0	1 x 4mm	2 x 4mm	1 x 5mm	2 x 5mm	3 x 5mm	0	1 x 5mm	2 x 5mm
<b>Material</b>	White Ceramic								
<b>Product Weight</b>	9g	14.2g	21.4g	23.4g	35.7g	50g	20.7g	42.5g	66.2g
<b>Guarantee</b>	1 Year								
<b>Conforms To</b>	BS 60998								