

COUGAR

IP65 rated aluminium die-cast asymmetric floodlight



APPLICATIONS

- Building facades, sports facilities, industrial premises and general area illumination

CONSTRUCTION

- Aluminium die-cast body enclosure with a fine texture black paint finish (RAL9017)
- 4mm toughened glass front panel
- Pre-wired with 1.5m H05RN-F 3x1mm² flex


OPTIONS

Wattage


- Choice of 5 wattages: 50W, 100W, 150W, and 200W

Photo-Electric Cell (PEC)

- PE1: All versions except 50W available with a PE cell for dusk to dawn control

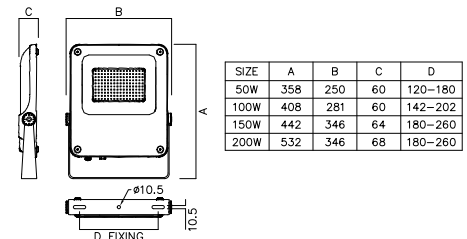

TYPICAL COUGAR LIGHT DISTRIBUTION DIAGRAM



ORDER CODE	WEIGHT (KG)	WINDAGE (m ²)	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.W)	SENSOR TYPE	CRI	CCT (K)
NCU50/740	3.2	0.05	52	6425	124		>70	4000
NCU100/740	4.0	0.10	100	10850	110		>70	4000
NCU150/740	5.6	0.11	150	16420	108		>70	4000
NCU200/740	7.85	0.14	200	23050	115		>70	4000

Photo-Electric Cell (PEC)

ORDER CODE	WEIGHT (KG)	WINDAGE (m ²)	POWER (W)	LUMENS (lm)	EFFICACY (l.m/c.W)	SENSOR TYPE	CRI	CCT (K)
NCU50/PEC/740	3.2	0.05	52	6425	124	Photo-Electric Cell	>70	4000
NCU100/PEC/740	4.0	0.10	100	10850	110	Photo-Electric Cell	>70	4000
NCU150/PEC/740	5.6	0.11	150	16420	108	Photo-Electric Cell	>70	4000
NCU200/PEC/740	7.85	0.14	200	23050	115	Photo-Electric Cell	>70	4000