

## LIGHTING ACCESSORIES


### STARTER SWITCHES



Standard: BS3772 / EN60166, CE Approved  
 Non Flammable Cap  
 Dimensions: 37 x l: 33 x dia: 21mm

Code	Type	
SER	4-22w Series starter	
S80	80w Starter switch	
S125	125w Starter switch	
EFS	Electronic Starter	

### PHOTOCELLS

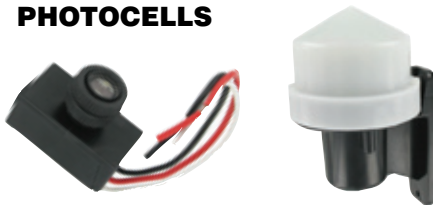

PCMINI


PCKIT

- Suitable for all types of domestic or Industrial lighting
- Delayed Response prevents false switching
- Max load 1000 Watt
- Long life - Guaranteed 5000 cycles (13.7 years)
- UV Stabilized Polypropylene base, high impact resistance
- Kit Contains Photocell, Socket & Gasket, Base Holder, Bracket and fixings
- Switching capacity in excess of EN 1972

Code	Type	
PCKIT	Photocell Kit	
PCMINI	Mini Photocell	

## CATENARY WIRE AND ACCESSORIES

### CATENARY WIRE KIT - 30 METRES

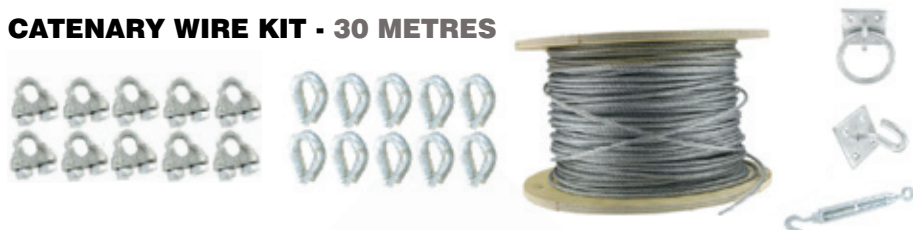

Code	Type	
ICWKIT	30m Kit & Accessories	

Includes:  
 1 of each ICW30, ICWS, ICWR, ICWH  
 10 of each ICWE & ICWG


### CATENARY WIRE



Material: Steel  
 Finish: Galvanized  
 Strand: 7

Code	Size & Type	
ICW30	30 mtr x 3mm COIL	
ICW50	50 mtr x 3mm COIL	
ICW100	100 mtr x 3mm DRUM	

### WIRE FIXING PACKS - ZIP-CLIP

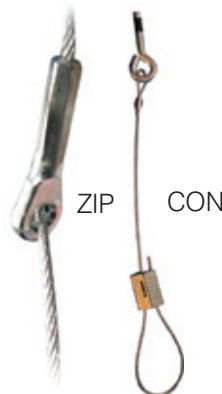

Code	Type	
ICWCLS3	3mtr Con-Lock	
ICWCLS5	5mtr Con-Lock	
ICWZLS3	5mtr Zip-Lock	
ICWZLS5	5mtr Zip-Lock	



### INDIVIDUAL ACCESSORIES

	Code	TYPE	
	ICWC	CARABINER HOOK	
	ICWE	EYELET	
	ICWG	ROPE GRIP	
	ICWH	HOOK PLATE	
	ICWS	4" STRAINER (TENSIONER)	
	ICWR	RING PLATE	

### RIIZE FOR 3MM WIRE - ZIP-CLIP



Code	Size	
ICWKL150	Zip Clip 3mm	



### WIRE HANGER - ZY



Code	size	
IWH660	M6 x 60	

Material: Steel  
 Usage: medium duty installation, expansion type  
 Application: Suspended ceilings, catenary / suspension wire  
 Substrate Applicable: Concrete, Stone and solid brickwork

## LIGHTING ACCESSORIES & CATENARY WIRE