

Technical Data Sheet

CODE 11955

VORT LETO MEV

Centralised continuous ventilation unit



Certifications




bre BRE SAP Q



TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	3,2	Delivery 1st speed (l/s)	20
Frequency (Hz)	50	Delivery 1st speed (m ³ /h)	72
Insulation Class	II°	Max delivery at max speed (l/s)	138,9
IP	X4	Max delivery at max speed (m ³ /h)	500
Max ambient temperature for continuous operation (°C)	50	Pressure - 1st speed (mmH2O)	10
Max. absorbed Current at max. speed (A)	0,55	Pressure - 1st speed (Pa)	98,1
Max. absorbed Current at min. speed (A)	0,4	Pressure max - max speed (mmH2O)	41,8
Max. absorbed power at max speed (W)	70	Pressure max - max speed (Pa)	410
Voltage (V)	230	RPM max	2150
Weight (Kg)	3	RPM min	400
		Sound pressure level Lp in free field [dB(A)] 3 m	42,2

DIMENSIONS



Etichetta Energetica	SI
Size A (mm)	387
Size B (mm)	377
Size C (mm)	284

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11955

VORT LETO MEV


Centralised continuous ventilation unit



DESCRIPTION

- Enclosure made of plastic material, colour grey, resistant to ageing.
- 4 ports for connection to extractor ducts, nominal diameter 125 mm;
- 1 port for connection to exhaust duct, nominal diameter 125 mm
- 3 speed EC motor with shaft turning in ball bearings, coupled to a centrifugal impeller; electronic control provided by microprocessor.
- Air flow between 72 m³/h and 500 m³/h
- 2 x closure plug for connection ports, diameter 125 mm.
- IMQ SAFETY certification.

CURVES

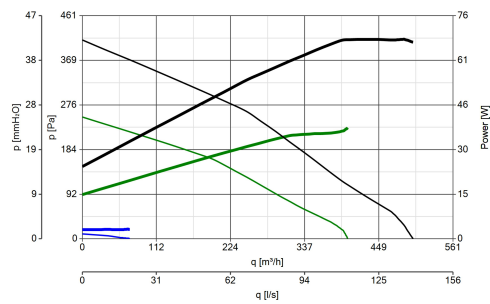

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com