


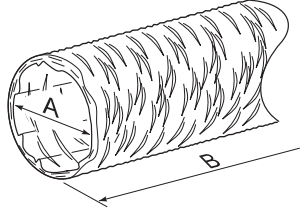
INSULATION FOR RIGID DUCTS




Flexible insulating sheath for rigid ducts.
Internal duct made of aluminium with rockwool insulation, outer sheath of reflective PVC film.

DIMENSIONS (mm)

Code	Models	Ø A	B
23220	SOCK 125	125	10 m
23221	SOCK 150	150	




NOISE ATTENUATOR AND SILENCER TUBE




For installation in the ventilation system, always positioned downstream of the fan and/or filter housing and/or heater, inside the duct.
Indicated when there is a requirement for particularly low noise levels.
Operating temperature from -30 °C to +60 °C.
Maximum operating pressure: 2000 Pa.
Maximum air speed: 25 m/s.

DIMENSIONS (mm) and WEIGHT

Code	Models	A	Ø B	Ø C	KG
22780	NA 100	1000	100	211	2
22781	NA 125		125	241	
22756	NA 150		150	266	
22783	NA 160		160	266	
22784	NA 200		200	316	
22785	NA 250		250	367	
22786	NA 315	315	417		
23222	NA 125/6	600	125/6	-	-
23223	NA 160/6		160/6	-	-
22366	Tubo silenziatore Ø 125 L=500	500	125	180	0.3
22316	Tubo silenziatore Ø 150 L=500		150	200	0.3

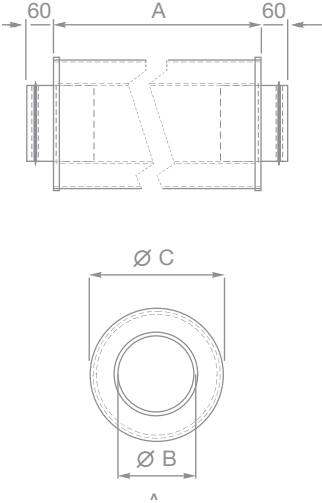

FLAT DUCT CONNECTOR



Polystyrene connector for flat duct.

DIMENSIONS (mm)

Code	Models	A	B	C
46131	SYS 100	110	54	62
46148	SYS 125	150	70	72
46175	SYS 150	180	95	80
46162	SYS 204	205	60	74

