
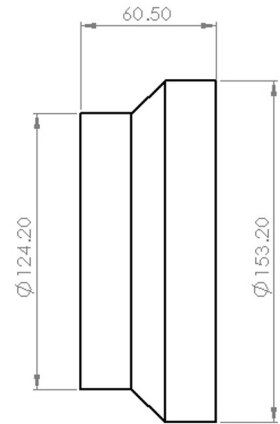


Technical Data Sheet

Code 46313

150 - 125mm Reducer Plastic

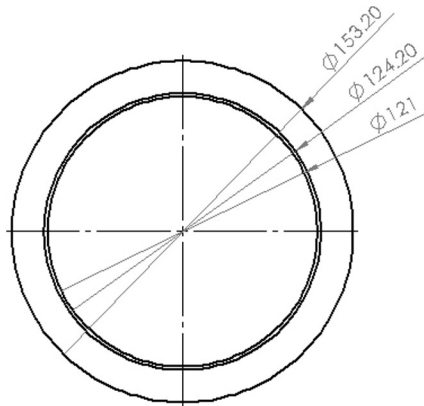

SPECIFICATION DETAILS

The 150mm -125mm diameter Reducer is manufactured from (white) High Impact Polystyrene, which has a minimum free area of 17,670mm² on the 150mm diameter side reducing to a free area of 11,500mm² on the 125mm side. The 125mm spigot fits inside the System 125 duct and the 150mm female fits onto a System 150 round spigot connector.


Fully compliant with SAP Appendix Q Product Characteristics Database recommendations for duct sizes used with both extract and Mechanical Heat Recovery Systems.

Manufactured in compliance with Domestic Plastic Ductwork Specification DW/154 and does meet UL94HB flammability standard.

MAX/MIN OPERATING TEMPERATURES

+ 60°C to - 15°C

PERFORMANCE CURVE

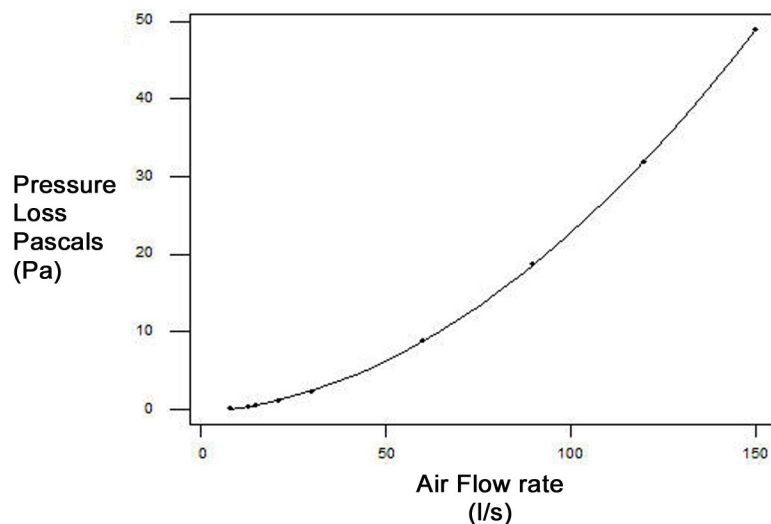

Size:	150 -125mm Diameter
For use with:	Vortice Ducting
Box quantity:	30
Individual Weight:	42g
Colour:	White

AIRFLOW

RESISTANCE

8 l/s	0.14 pa
13 l/s	0.30 pa
21 l/s	1.10 pa
30 l/s	2.20 pa
60 l/s	8.80 pa
120 l/s	32.00 pa

Vortice Limited
Beeches House
Eastern Avenue
Burton Upon Trent
DE13 0BB
Tel: 01283 492949
Fax: 01283 544121
sales@vortice.ltd.uk
www.vortice.ltd.uk