


## TECHNICAL DATASHEET

### AFPD006/CCT

#### 6W Orbit CCT Selectable Flat Panel Slimline Downlight



#### DIMENSIONS

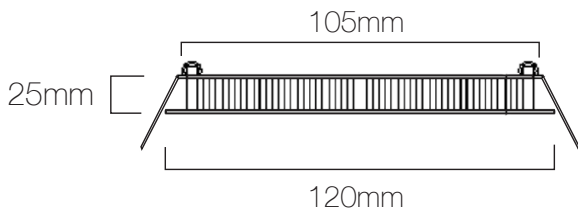

Cutout: Ø105mm  
Overall: Ø120mm  
Depth: 25mm

#### PRODUCT FEATURES

- CCT Selectable (3000K/4000K/6000K)
- UV Stable
- Flicker Free
- Low Glare Edge-Lit Design
- Slimline Design
- Ideal For Use In Shallow Ceiling Voids
- High Luminous Efficiency
- Plug & Play DC Connector Driver
- Uniform Light Output
- DC Connector
- Easy Installation

<b>6W</b>	<b>CLASS 2</b>	<b>≤380 lumens</b>	<b>UV STABLE</b>
<b>CCT Selectable</b>	<b>120°</b>	<b>FLICKER FREE</b>	<b>GUARANTEE 5 YEAR</b>
<b>Instant Full Light</b>	<b>IP20</b>		

PRODUCT CODE	AFPD006/CCT
Frame colour	White
Wattage	6W
Operating Voltage	220 - 240V AC
Frequency	50-60Hz
CCT	3000K, 4000K, 6000K
CRI	>80
PF	>0.5
Beam angle	120°
Peak intensity	235cd
Lifetime to LM80	30,000H
Lumens	<b>≤380LM</b>
Switching cycles	<15,000
Ambient operating temperature	-20 ~ 50°C
SDCM	<8
Starting time	Instant start
Ingress protection	IP20
LED chips	SMD2835
Guarantee	5 Years
Cut outs	Ø105mm
Overall diameter	Ø120mm
Driver dimensions	95mm (W), 35mm (D), 25mm (H)
Class Driver	II
Class Downlight	III

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

**LED**

**A++**  
**A+**  
**A**  
**B**  
**C**  
**D**  
**E**

**ALL LED** AFPD06/CCT 874/2012

Options Available:

<b>MAINS DIMMABLE</b>	<b>1-10V</b>	<b>1-10V EMERGENCY</b>
<b>EM</b>	<b>DALI</b>	<b>DALI EMERGENCY</b>