


Handles



| Characteristics | Standard handle | Standard handles with keys | Handle lock operated using screwdriver insert |
|-------------------|--|---|---|
| | <p>Operating handle delivered with the enclosure.</p> <ul style="list-style-type: none"> It can be attached to the locking system by means of a fixing element. It can also be used to loosen the caps protecting the studs when painting. | <p>Attractive and ergonomic bi-material handle.</p> <ul style="list-style-type: none"> Large range of barrels covering all the most common needs. Standard cam (see diagram above). The installation of the standard handle does not require the escutcheon to be removed. | - |
| Supply | - | Delivered with 2 keys | - |
| References | | | |
| - | - | - | NSYTSMLS3D |
| 1242 | - | NSYAEDL1242S3D | - |
| 405 | - | NSYAEDL405S3D | - |
| 421 | - | NSYAEDL421S3D | - |
| 455 | - | NSYAEDL455S3D | - |
| 2331A | - | NSYAEDL2331S3D | - |
| 2433A | - | NSYAEDL2433S3D | - |
| 3113A | - | NSYAEDL3113S3D | - |
| 3524E | - | NSYAEDL3524S3D | - |
| 3131A | - | NSYAEDL3131AS3D New | - |
| 610 | - | NSYAEDL610S3D New | - |

Locks

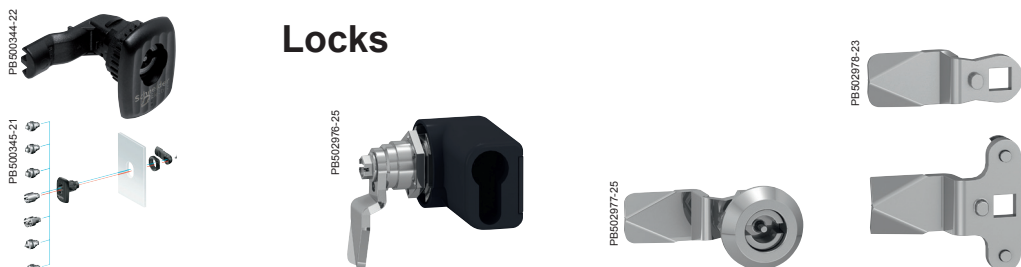

| Characteristics | Standard locks | Barrel DIN kit | Double bar 3 mm metal lock | Metal cam kit 1 point and 3 points |
|------------------------------|---|---|---|------------------------------------|
| | <p>Spacial S3D wall-mounting enclosures are supplied with a 3 mm double-bar lock as standard.</p> <ul style="list-style-type: none"> Spare lock: order ref. NSYAEDLS3DRL (escutcheon + cam + washer). Large range of standardised inserts covering all the most common needs. Installation and removal with a single screw. | <ul style="list-style-type: none"> Mounting of half-cylinder according to DIN 18252 (EN1303) brass nikel plated with 2 keys. Cam can be turned every 45°. Easy mounting instead of standard lock. | <p>Easy mounting instead of standard lock.</p> | <p>To adapt other locks.</p> |
| Material | - | Polyamide GF | Zamack | Zinc-coated metal |
| Mechanical protection rating | - | IP66 | - | - |
| Supply | Delivered with 1 plastic key | Delivered with metal cam 1 point and metal cam 3 points | Delivered with metal cam 1 point and metal cam 3 points | - |
| References | | | | |
| - | - | NSYAEDDINS3D* | NSYAEDLB3MS3D* | NSYAEDLMETS3D* |
| 6 mm square | NSYAEDLS6S3D | | | |
| 7 mm square | NSYAEDLS7S3D | | | |
| 8 mm square | NSYAEDLS8S3D | | | |
| 3 mm double bar | NSYAEDLB3S3D | | | |
| 5 mm double bar | NSYAEDLB5S3D | | | |
| CNOMO 6.5 mm triangular | NSYAEDLT6S3D | | | |
| 8 mm triangular | NSYAEDLT8S3D | | | |

* Available from June 2015.