




**IP rate** IP20 IP65


DC 24V CE 1 BIN Dimmable LM 80 Ra 90 180° 3 years



**Illuminance Distribution**

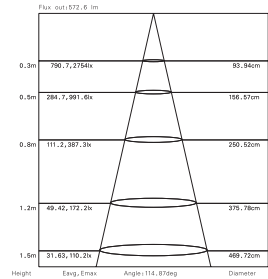

**Dimensions & Available Lengths**

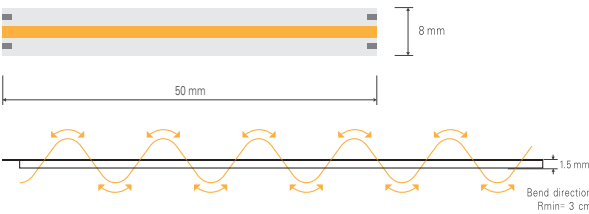

**Aluminium Profiles**



**Electrical & Output Data**

Model No.	LUX-10WIP20-COB	LUX-10WIP65-COB
Strip length (mm/x LED)	50mm	50mm
Number LED/m	512	512
Voltage (V)	24V	24V
Ra	90	90
Beam Angle (°)	180	180
Power (W/m)	10	10
FPC Width (mm)	8	8
Max. length per circuit (m)	5	5
IP Rating	IP20/65	IP20/65
Installation	3M Tape / Mounting Clips / Aluminium Profiles	

**Light Efficiency & Lumen Output**

Luminaire efficacy 91lm/W @Ra90 (3000K)

**LED colour Ra90**

◇ = Popular Colour

2700K ◇ 8791m

4000K ◇ 9341m

6500K ◇ 8871m

\* Add WW for 2700K / CW for 4000K / DL for 6500K. 5m pack or 50m roll available.