

Important Safety Notice

It is the responsibility of the person installing the electrical equipment to ensure that the installation meets the requirements of the IET wiring regulations and is therefore 'fit for purpose'. Factors such as correct selection of components, cable sizing, protective devices and Earth bonding are all critical and should be checked prior to full testing and power-up. Any other regulations applicable to the equipment being installed such as the Machinery Directive and current health and safety legislation must also be adhered to. All connections (including factory made) must be checked for the correct tightness prior to commissioning of the electrical installation.

All connections should be checked periodically to ensure correct tightness.

DO NOT USE POWER TOOLS ON THESE PRODUCTS



✓ Earth Studs Included

✓ IP65 to EN60 529 NEMA4 (When Fitted & Sealed)

✓ Top & Bottom Gland Plates

✓ Fixing Brackets Available

✓ Galvanised Back Plate Included

✓ Strong Steel (Powder Epoxy Coated)

✓ Body and door RAL7035 (textured finish)

✓ Mounting plate in galvanized zinc steel sheet

✓ Body and door manufactured in 1.2 to 1.5mm sheet steel


✓ Gland plate manufactured in 2.0mm to 2.5mm sheet steel

✓ Enclosure coated with standard cycle thermosetting epoxy polyester powder



STBKEYLOCK Dimensions:

L1	L2	L3	B1	H1	φD
50mm	32.5mm	50mm	20mm	26.7mm	22mm

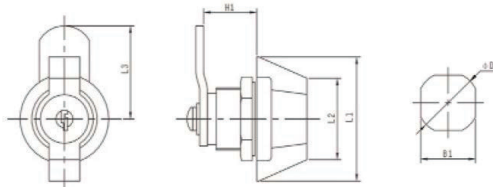

Key operated barrel lock also available....



Dimensions provided are for guidance purposes only

Part number	External Dimensions			Internal Depth	Gland Plate Hole		Mounting plate		Other Information (GPTB = Gland Plate Top & Bottom)
	H (mm)	W (mm)	D (mm)	ID - From Mounting Plate	W1 (mm)	D1 (mm)	W3 (mm)	H3 (mm)	
Portrait									
STB252515A	250	250	150	125	130	62	190	190	1 Lock, GPTB
STB302515A	300	250	150	125	130	62	190	240	1 Lock, GPTB
STB303015A	300	300	150	125	180	62	240	240	1 Lock, GPTB
STB303020A	300	300	200	175	180	62	240	240	1 Lock, GPTB
STB403015A	400	300	150	125	180	62	240	340	1 Lock, GPTB
STB403020A	400	300	200	175	180	62	240	340	1 Lock, GPTB
STB403025A	400	300	250	225	180	62	240	340	1 Lock, GPTB
STB404015A	400	400	150	125	215	62	340	340	1 Lock, GPTB
STB404020A	400	400	200	175	215	62	340	340	1 Lock, GPTB
STB504020A	500	400	200	175	315	120	340	440	2 Lock, GPTB
STB504025A	500	400	250	225	315	120	340	440	2 Lock, GPTB
STB505025A	500	500	250	225	415	120	440	440	2 Lock, GPTB
STB604020A	600	400	200	175	315	120	340	540	2 Locks, GPTB
STB604030A	600	400	300	275	315	120	340	540	2 Locks, GPTB
STB604040A	600	400	400	375	315	120	340	540	2 Locks, GPTB
STB605020A	600	500	200	175	415	120	440	540	2 Locks, GPTB
STB605025A	600	500	250	225	415	120	440	540	2 Locks, GPTB
STB605030A	600	500	300	275	415	120	440	540	2 Locks, GPTB
STB606020A	600	600	200	175	415	120	540	540	2 Locks, GPTB
STB606025A	600	600	250	225	415	120	540	540	2 Locks, GPTB
STB705020A	700	500	200	175	415	120	440	640	2 Locks, GPTB
STB705025A	700	500	250	225	415	120	440	640	2 Locks, GPTB
STB705030A	700	500	300	275	415	120	440	640	2 Locks, GPTB
STB804030A	800	400	300	275	315	120	340	740	2 Locks, GLTB
STB806020A	800	600	200	175	415	120	540	740	2 Locks, GPTB
STB806030A	800	600	300	275	415	120	540	740	2 Locks, GPTB
STB806040A	800	600	400	375	415	120	540	740	2 Locks, GPTB
STB1006030A	1000	600	300	275	415	120	540	940	2 Locks, GPTB
STB1008030A	1000	800	300	275	315	120	730	940	2 locks, 4 Gland Plates (2 top / 2 bottom)
STB1008040A	1000	800	400	375	315	120	730	940	2 locks, 4 Gland Plates (2 top / 2 bottom)
STB1206030A	1200	600	300	275	315	120	540	1130	3 locks, 4 Gland Plates (2 top / 2 bottom)
STB1208030A	1200	800	300	275	315	120	730	1130	3 locks, 4 Gland Plates (2 top / 2 bottom)
STB1208040A	1200	800	400	375	315	120	730	1130	3 locks, 4 Gland Plates (2 top / 2 bottom)
Landscape									
STB304020A	300	400	200	175	315	120	340	240	1 Lock, GPTB
STB405020A	400	500	200	175	415	120	440	340	1 Lock, GPTB
STB406020A	400	600	200	175	415	120	540	340	1 Lock, GPTB
STB406030A	400	600	300	275	415	120	540	340	1 Lock, GPTB

