

4 Pole Enclosed Manual Changeover Switches



Insulated Metal Clad Steel GRPC

IEC & EN 60947-3

Padlockable in the OFF position for added security (For up to 3 padlocks) / Manual break before make 3 Position Switch - centre OFF/ **All switch ratings at AC-22** - See page 141 for technical data / Fitted with **2 early make / late break neutral contacts**

**Range
Extended**

Insulated Enclosure: (IP65)

25mm cable entries / Easy access & switch removal
Robust polycarbonate enclosure / UV resistant
Enclosure glow wire flammability rating 960°C

Metal Clad Enclosure (STB): (IP54)

Cover: RAL 7035 / Base: RAL 7043

Steel Enclosure: (IP65)

Bottom gland plate / Epoxy powder coated steel / RAL 7035

Glass Reinforced Polycarbonate Enclosure: (IP66)

UV Resistant / Enclosure glow wire flammability rating 960°C
RAL: 7035

Part Number	Description	Price	Per
LBC254P	25A 4 Pole (Insulated Enclosure)	£58.21	1
LBC324P	32A 4 Pole (Insulated Enclosure)	£64.95	1
LBC404P	40A 4 Pole (Insulated Enclosure)	£69.21	1
LBC634PBB	63A 4 Pole (Larger Insulated Enclosure)	£135.04	1
LBC1254PBB	125A 4 Pole (Larger Insulated Enclosure)	£344.07	1
LBC254PSTB	25A 4 Pole (Metal Clad Enclosure)	£95.31	1
LBC324PSTB	32A 4 Pole (Metal Clad Enclosure)	£99.14	1
LBC404PSTB	40A 4 Pole (Metal Clad Enclosure)	£107.66	1
LBC634PSTB	63A 4 Pole (Metal Clad Enclosure)	£136.42	1
LBC634P	63A 4 Pole (Steel Enclosure)	£188.58	1
LBC804P	80A 4 Pole (Steel Enclosure)	£297.81	1
LBC1254PME	125A 4 Pole (Steel Enclosure)	£366.84	1
LBC1254PGP	125A 4 Pole (GRPC)	£428.61	1


4 Pole Changeover Switch-Disconnectors Dimensions (mm)

Part Number	Height	Width	Depth	Depth (Inc Switch)	Additional Aux. (Ordered Separately)
LBC254P	280	190	130	190	-
LBC324P					
LBC404P					
LBC634PBB	380	280	130	190	2 Auxiliaries*
LBC1254PBB	560	380	180	140	
LBC254PSTB	270	215	125	185	
LBC324PSTB					
LBC404PSTB					
LBC634PSTB					
LBC634P	400	300	200	260	-
LBC804P					
LBC1254PME	500	400	200	257	-
LBC1254PGP	500	400	210	270	

*With extended auxiliaries (LB263ERN) 1 either side of the switch

Firefighter's Switches

Aluminium Enclosed Firefighter's Switches (IP65)

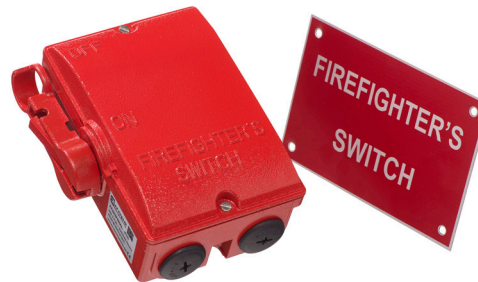

EN 60947-3

Padlockable in the OFF position for added security (For 1 padlock)
4 x M25 threaded cable entries
1 x M16 threaded entry (Top)
Epoxy powder coated die cast aluminium enclosure
Lid removable in OFF position only
Complies with the requirements of section 537.4 of the IET wiring regulations

Part Number	Description	Price	Per
FF403PAL	40A Enclosed 3 Pole + Neutral	£80.82	1
FF403PSNAL	40A Enclosed 3P + Sw. Neutral	£90.28	1

Height	Width	Depth
157mm	126mm	69mm

Door Interlock Switch-Disconnectors

3 Pole Door Interlock with Metal Shaft



Shaft can
be cut down
to suit
application

IEC & EN 60947-3

Padlockable in the OFF position for added security (For up to 3 padlocks)
Rear mount or snap on din rail mount (35mm)
Shaft Length: 282mm / Shaft 8mm across flats (Hexagonal)
Use rubber gasket (LBGASKET) for IP65 rating - Sold separately
All switch ratings at AC-22 - See page 141 for technical data

Part Number	Description	Price	Per
LBDI253P	25A 3 Pole Door Interlocked	£21.34	1
LBDI323P	32A 3 Pole Door Interlocked	£25.57	1
LBDI403P	40A 3 Pole Door Interlocked	£28.38	1
LBDI633P	63A 3 Pole Door Interlocked	£32.75	1
LBDI803P	80A 3 Pole Door Interlocked	£39.88	1
LBDI1003P	100A 3 Pole Door Interlocked	£45.31	1
LBDI1253P	125A 3 Pole Door Interlocked	£51.96	1