

# Product datasheet

Specifications



Push button head, plastic, flush, white, Ø22, spring return, marked UP ARROW

Local distributor code: 237166322    ZB5AA334

EAN Code : 3389110134582

## Main

|                               |                                      |
|-------------------------------|--------------------------------------|
| Range of product              | Harmony XB5<br>Harmony XALF          |
| Product or component type     | Head for non-illuminated push-button |
| Device short name             | ZB5                                  |
| Bezel material                | Dark grey plastic                    |
| Mounting diameter             | 22 mm                                |
| Head type                     | Standard                             |
| Sale per indivisible quantity | 1                                    |
| Shape of signaling unit head  | Round                                |
| Type of operator              | spring return                        |
| Operator profile              | White flush, up arrow (black)        |

## Complementary

|                             |                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAD overall width           | 29 mm                                                                                                                                                                                                                                                                                                                                                                              |
| CAD overall height          | 29 mm                                                                                                                                                                                                                                                                                                                                                                              |
| CAD overall depth           | 28 mm                                                                                                                                                                                                                                                                                                                                                                              |
| Net weight                  | 0.018 kg                                                                                                                                                                                                                                                                                                                                                                           |
| Mechanical durability       | 10000000 cycles                                                                                                                                                                                                                                                                                                                                                                    |
| Station name                | XALD 1...5 cut-outs<br>XALK 2...5 cut-outs                                                                                                                                                                                                                                                                                                                                         |
| Electrical composition code | C1 for <9 contacts using single blocks in front mounting<br>C2 for <9 contacts using single and double blocks in front mounting<br>C11 for <3 contacts using single blocks in front mounting<br>C15 for <1 contacts using single blocks in front mounting<br>SF1 for <3 contacts using single blocks in front mounting<br>SR1 for <3 contacts using single blocks in rear mounting |
| Device presentation         | Basic element                                                                                                                                                                                                                                                                                                                                                                      |

## Environment

|                                       |             |
|---------------------------------------|-------------|
| Protective treatment                  | TH          |
| Ambient air temperature for storage   | -40...70 °C |
| Ambient air temperature for operation | -40...70 °C |

|                                    |                                                                                                                                                                                |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Overvoltage category               | Class II conforming to IEC 60536                                                                                                                                               |
| IP degree of protection            | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K                                                                                                                          |
| NEMA degree of protection          | NEMA 13<br>NEMA 4X                                                                                                                                                             |
| Resistance to high pressure washer | 7000000 Pa at 55 °C, distance : 0.1 m                                                                                                                                          |
| IK degree of protection            | IK03 conforming to IEC 50102                                                                                                                                                   |
| Standards                          | JIS C8201-5-1<br>EN/IEC 60947-5-4<br>CSA C22.2 No 14<br>EN/IEC 60947-5-1<br>EN/IEC 60947-1<br>UL 508<br>JIS C8201-1                                                            |
| Product certifications             | BV<br>LROS (Lloyds register of shipping)<br>CSA<br>DNV<br>GL<br>UL listed                                                                                                      |
| Shock resistance                   | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27 |
| Vibration resistance               | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6                                                                                                                               |

### Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 4.500 cm  |
| Package 1 Width              | 3.400 cm  |
| Package 1 Length             | 5.400 cm  |
| Package 1 Weight             | 17.000 g  |
| Unit Type of Package 2       | BB1       |
| Number of Units in Package 2 | 5         |
| Package 2 Height             | 4.500 cm  |
| Package 2 Width              | 3.400 cm  |
| Package 2 Length             | 26.500 cm |
| Package 2 Weight             | 84.000 g  |
| Unit Type of Package 3       | S03       |
| Number of Units in Package 3 | 300       |
| Package 3 Height             | 30.000 cm |
| Package 3 Width              | 30.000 cm |
| Package 3 Length             | 40.000 cm |
| Package 3 Weight             | 5.613 kg  |

### Offer Sustainability


|                          |                                                                                                   |
|--------------------------|---------------------------------------------------------------------------------------------------|
| Sustainable offer status | Green Premium product                                                                             |
| REACH Regulation         | <a href="#">REACH Declaration</a>                                                                 |
| REACH free of SVHC       | Yes                                                                                               |
| EU RoHS Directive        | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |

|                            |                                               |
|----------------------------|-----------------------------------------------|
| Toxic heavy metal free     | Yes                                           |
| Mercury free               | Yes                                           |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>        |
| RoHS exemption information | <a href="#">Yes</a>                           |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a> |
| Circularity Profile        | <a href="#">End of Life Information</a>       |

Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions



Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3\text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88\text{ in. }_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ( $\text{Ø}22.3\text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88\text{ in. }_0^{+0.016}$ )

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer’s Side)



A: 30 mm min. / 1.18 in. min.  
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

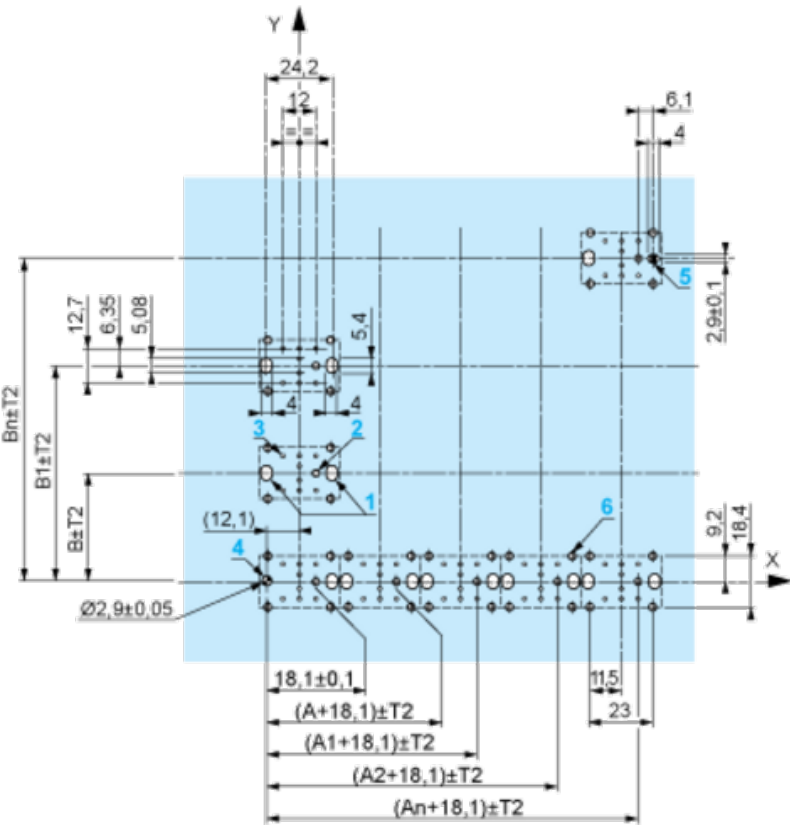

A: 30 mm min.  
B: 40 mm min.  
Dimensions in in.



A: 1.18 in. min.  
 B: 1.57 in. min.


### General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.:  $T1 + T2 = 0.3 \text{ mm max.}$

### Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm  $\pm$  0.1 / 0.88 in.  $\pm$  0.004
- Orientation of body/fixing collar ZB5AZ009:  $\pm 2^\circ 30'$  (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
  - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
  - with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

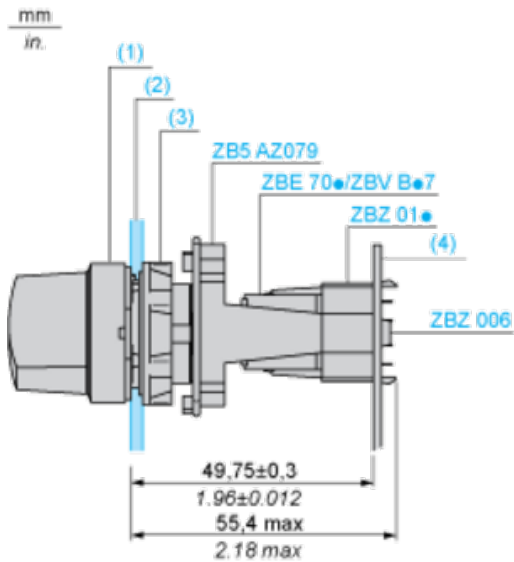

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

**Mounting of Adapter (Socket) ZBZ01•**

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ01•.


Electrical Composition Corresponding to Code C1

---



Electrical Composition Corresponding to Code C2

---




Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1

---




Electrical Composition Corresponding to Code C15


1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

---

Single contact



Double contact






Light block









Possible location



Dimensions

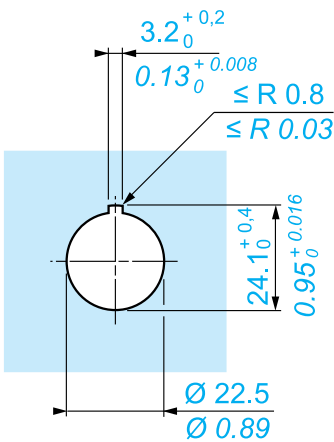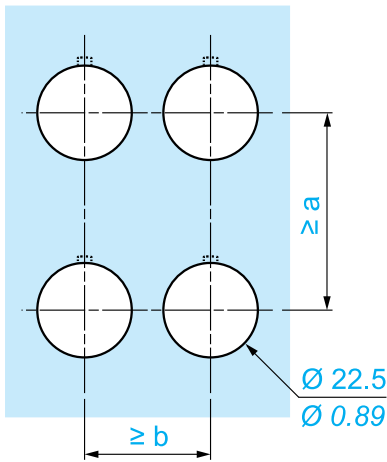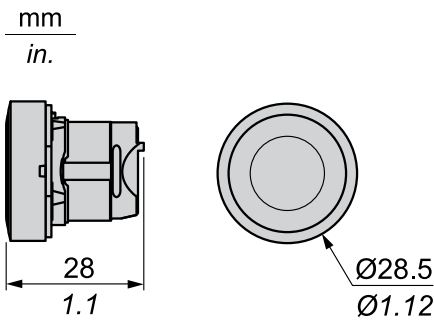

|                                                                                     |                                                                                     | a (mm) | a (in.) | b (mm) | b (in.) |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------|---------|--------|---------|
|    |    | 40     | 1.57    | 30     | 1.18    |
| ZBE●●●●●                                                                            | ZBV●●●●●                                                                            |        |         |        |         |
|   |   | 45     | 1.77    | 32     | 1.26    |
| ZBE●●●●●3                                                                           | ZBV●●●●●3                                                                           |        |         |        |         |
|  |  | 40     | 1.57    | 30     | 1.18    |
| ZBE●●●●●4                                                                           | ZBV●●●●●4                                                                           |        |         |        |         |
|  |  | 50     | 1.97    | 30     | 1.18    |
| ZBE●●●●●5                                                                           | ZBV●●●●●5                                                                           |        |         |        |         |
|  |  | 40     | 1.57    | 30     | 1.18    |
| ZBE●●●●●9                                                                           | ZBV●●●●●9                                                                           |        |         |        |         |
|  |  | 40     | 1.57    | 30     | 1.18    |
| ZBRT●                                                                               | ZBRV1                                                                               |        |         |        |         |

Recommended replacement(s)