
## Hamilton

## www.hamilton-litestat.com

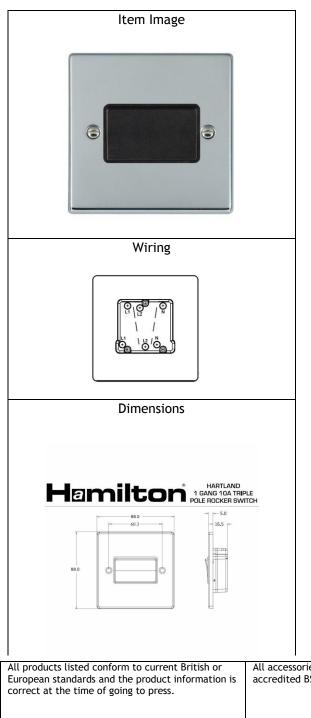

| be Black with a Black surround. |  |  |
|---------------------------------|--|--|
|                                 |  |  |
| Primary Range                   | Hartland                               |  |
| Insert Type                     | Triple Pole Fan Isolators              |  |
| Plate Finish                    | Bright Chrome                          |  |
| Frame Finish                    |  |  |
| Switch Colour                   | Black                                  |  |
| Body & Switch Trim              | Black                                  |  |
| Height                          | Single = 88mm                          |  |
| Width                           | Single = 88mm                          |  |
| Depth                           | Single = 5mm                           |  |
| Fixing Hole Centres             | Box Fixing = 60.3mmBox Fixing = 60.3mm |  |
| Minimum Wall Box Depth          | 25mm                                   |  |
| Wattage                         |  |  |
| Switched Poles                  | Triple                                 |  |
| Current Rating                  | 10A                                    |  |
| Voltage                         | 220/250V AC                            |  |
| Max load                        | 10 Amp resistive                       |  |
| Contact Gap Minimum             | 3mm                                    |  |
| Terminal Capacity 1             | 5 x 1mm2                               |  |
| Terminal Capacity 2             | 4 x 1.5mm2                             |  |
| Terminal Capacity 3             | 1 x 2.5mm2                             |  |
| Terminal Capacity 4             | 1 x 4mm2 Multi-Strand                  |  |
| Terminal Capacity 5             | 1 x 6mm2                               |  |
| Earth Terminal Capacity 1       | 5 x 1mm2                               |  |
| Earth Terminal Capacity 2       | 4 x 1.5mm2                             |  |
| Earth Terminal Capacity 3       | 3 x 2.5mm2                             |  |
| Earth Terminal Capacity 4       | 1 x 4mm2 Multi-Strand                  |  |
| Earth Terminal Capacity 5       | 1 x 6mm2                               |  |
| Product Class 1                 | Must be earthed                        |  |
| Ambient Operating               | -5° to +40°C                           |  |
| Temperature                     |  |  |
| Recommended Location            | Indoor use only                        |  |
| Standard/Approval               | BS EN 60669-1                          |  |
| Patents and Trademarks          | Trade Mark No. 2344778                 |  |

77 TP BL-B

Hartland Bright Chrome 1 gang 10A Triple Pole Rocker. Standard Insert will

| All products listed conform to current British or<br>European standards and the product information is<br>correct at the time of going to press. | All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.                       | It is the policy of the company to continually<br>improve products as part of our development<br>programme.<br>Therefore, we reserve the right to alter designs<br>and dimensions without prior notice. |
|--|--|---|
| Illustrations and diagrams are reproduced within<br>the limitations of reproductions and printing<br>processes are not binding.                  | Due to manufacturing processes we cannot<br>guarantee an exact colour match and shadings of<br>certain finishes. | Correct as at August 2012<br>E&OE   |

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary) Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire Registered in London No. 941624 • VAT Registration No. 222 6607 84



