




Metallic Systems

SP Fitting Type M



Technical Characteristics

Conforms to	BSI Kitemark KM-35161 Low voltage directive Inherent Low Fire Hazard		
Approvals and Standards	 		
Degree of mechanical protection	High		
Degree of protection	IP65 - with all Adaptasteel liquid resistant conduit in the series		
UV protection	Very High		
Fitting characteristics		Straight swivel fitting external male thread	
Application	For insertion into threaded entries & knockouts using a locknut		
Normal operating temperature range	Application	Min Temp	Max Temp
	Static	- 50°C	+300°C
	Dynamic	- 45°C	+250°C
For use with - Conduit series	Type SP , SN & LFH-SP		

Fire performance	Test Standard	Performance Rating
	EN45545	ILFH
	NFF16-101	ILFH
	LUL-1085	ILFH
	BS6855	ILFH
	DIN 5510-2	ILFH



Testing data [Click or see page 5](#)

Type of material Nickel Plated Brass




Metallic Systems

SP Fitting Type M



Dimensional Data

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
SP10/M16/M	M16 x 1.5	12.0	20	22	5.7	22.0
SP12/M16/M	M16 x 1.5	12.0	20	22	8.6	24.0
SP16/M16/M	M16 x 1.5	12.0	21	24	10.3	25.4
SP16/M20/M	M16 x 1.5	12.0	21	28	10.3	25.4
SP20/M20/M	M20 x 1.5	12.0	19	25.4	14.3	28.5
SP25/M25/M	M25 x 1.5	15.0	28	32	17.6	35.0
SP32/M32/M	M32 x 1.5	15.0	31	38	24.0	42.0
SP40/M40/M	M40 x 1.5	16.0	38	50	33.0	52.0
SP50/M50/M	M50 x 1.5	18.0	41	60	38.5	60.0
SP63/M63/M	M63 x 1.5	25.0	41	70	50.0	70.0

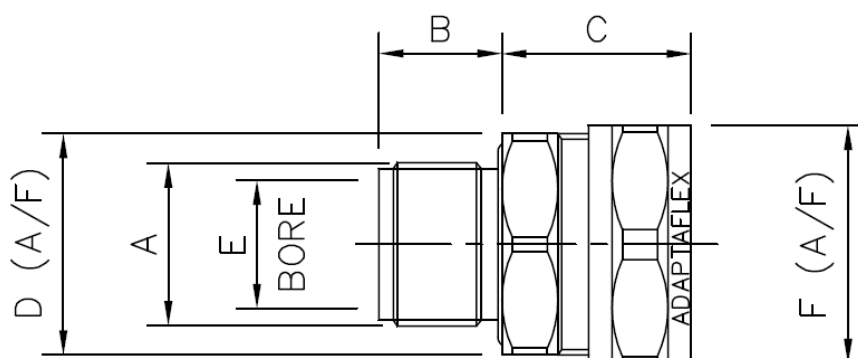


Metallic Systems

SP Fitting Type M



Dimensional Data

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
SP10/PG7/M	PG7	11.0	46	20	5.7	22.0
SP12/PG9/M	PG9	11.0	20	22	8.1	24.0
SP16/PG11/M	PG11	11.0	20	24	10.3	25.4
SP16/PG13/M	PG13.5	11.0	21	24	10.3	25.4
SP20/PG16/M	PG16	11.0	21	25.4	14.3	28.5
SP25/PG21/M	PG21	12.0	28	32	17.6	35.0
SP32/PG29/M	PG29	12.0	31	38	24.0	42.0
SP40/PG36/M	PG36	16.0	38	56	33.0	52.0
SP50/PG42/M	PG42	18.0	41	60	38.5	60.0
SP63/PG48/M	PG48	25.0	46	70	50.0	70.0

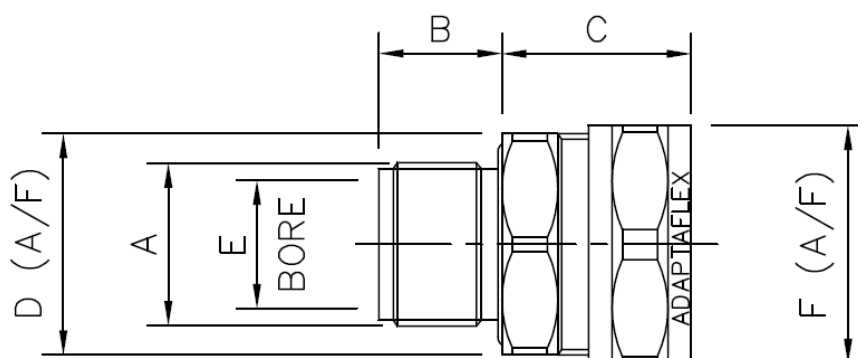


Metallic Systems

SP Fitting Type M



Dimensional Data

Part No	Thread A	Nominal Dimensions (mm)				F (mm)
		B	C	D	E	
SP16/038/M	NPT 3/8"	11.0	21	24	10.3	24.4
SP20/050M	NPT 1/2"	15.0	19	25.4	14.3	28.5
SP25/075/M	NPT 3/4"	16.0	28	32	17.6	35.0
SP32/100/M	NPT 1"	19.0	31	38	24.0	42.0
SP40/125/M	NPT 1 1/14"	20.0	34	50	33.0	52.0
SP50/150/M	NPT 1 1/2"	21.0	41	60	38.5	60.0

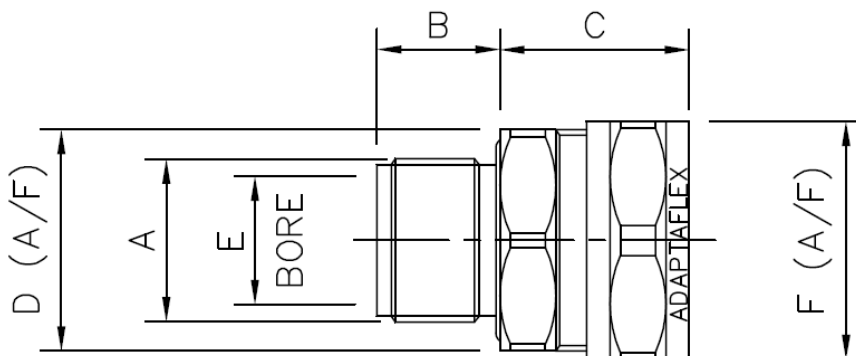

Metallic Systems

SP Fitting Type M



Chemical Resistance Chart

Key:	● Astm No.1	● Diesel oil	● Methyl Bromide	● Sulphur Dioxide (Gas)
	● Astm No.2	● Diethylamine	● MEK	● Sulphuric Acid (10%)
	● Astm No.3	● Ethanol	● Nitric Acid (10%)	● Sulphuric Acid (70%)
	● Acetic Acid (10%)	● Ether	● Nitric Acid (70%)	● Toluene
	● Acetone	● Ethylamine	● Oxalic Acid	● Transformer Oil
	● Aluminium Chloride	● Ethylene Glycol	● Ozone (Gas)	● 1,1,1-Trichloroethane
	● Aniline	● Ethyl Ethanoate	● Paraffin oil	● Trichloroethylene
	● Benzaldehyde	● Freon 32	● Petrol	● Turpentine
	● Benzene	● Hydrochloric Acid (10%)	● Phenol	● Vegetable Oil
	● Carbon tetrachloride	● Hydrochloric Acid (36%)	● Sea Water	● Vinyl Acetate
	● Chlorine water	● Hydrogen Peroxide (35%)	● Silver Nitrate	● Water
	● Chloroform	● Hydrogen Peroxide (87%)	● Skydrol	● White Spirit
	● Citric Acid	● Lactic Acid	● Sodium Chloride	● Zinc Chloride
	● Copper Sulphate	● Lubricating oil	● Sodium Hydroxide (10%)	
	● Cresol	● Methanol	● Sodium Hydroxide (60%)	

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact Thomas & Betts for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.

MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

Chemical Resistance Chart

Metric	Standard thread conforming to EN60423 & BS3643			PG	German Standard thread conforming to DIN40430			NPT	US taper seal pipe thread conforming to ANSI/ASME B1.20.1-1983		
	Thread Size mm	Ext Thread Outside Diameter	Int Thread Inside Diameter		Pitch	Thread Size	Ext Thread Outside Diameter		Int Thread Inside Diameter	Pitch	Thread Size Inch
M10	10.0	8.9	1.0	PG7	12.5	11.3	1.27	-	-	-	-
M12	12.0	10.4	1.5	PG9	15.2	13.9	1.41	3/8"	16.7	1.14	
M16	16.0	14.4	1.5	PG11	18.6	17.3	1.41	1/2"	21.0	1.81	
M20	20.0	18.4	1.5	PG13.5	20.4	19.1	1.41	3/4"	26.4	1.81	
M25	25.0	23.4	1.5	PG16	22.5	21.2	1.41	1"	33.3	2.21	
M32	32.0	30.4	1.5	PG21	28.3	26.8	1.59	1 1/4"	41.9	2.21	
M40	40.0	38.4	1.5	PG29	37.0	35.5	1.59	1 1/2"	47.8	2.21	
M50	50.0	48.4	1.5	PG36	47.0	45.5	1.59	2"	59.6	2.21	
M63	63.0	61.4	1.5	PG42	54.0	52.2	1.59				
M75	75.0	73.4	1.5	PG48	59.3	57.8	1.59				