
Simply Silent™ DX150 6"/150mm axial extract fan range



The Simply Silent[™] DX150 intermittent extract fan range is designed for those looking for something conventional, with a modern twist. These fans control humidity, odours and mould growth effectively in kitchens, utility rooms, larger bathrooms and individual offices. Suitable for both wall and ceiling fitting. The DX150 range has two speeds, selectable at install.

Product Selector	DX150
Speeds	2
Extract Performance (I/s)	60/67
Extract Performance (m ³ /h)	214/241
Electrical Power Rating (W)	15/22.6
Specific Fan Power (SFP) (W/l/s)	0.25/0.34
Sound Pressure Level (dBA@3m)	39/42
IP Rating	IPX4

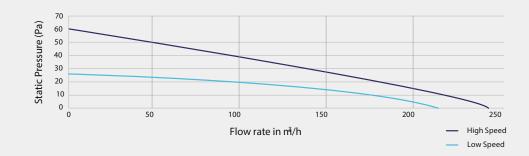

Flow rate in m³/h

241.10

228.76

215.72

201.85

186.94


170.74

152.82

132.49


108.37 76.90 0.00

Low	Hig	
Static Pressure (Pa)	Flow rate in m³/h	Static Pressure (Pa)
0	213.66	0
2.6	203.27	5.5
5.4	191.70	9.8
8	179.38	14.5
11.5	166.15	18.3
13.6	151.76	22
16.3	135.85	25.1
18.3	117.79	29.3
20.2	96.36	35
21.3	68.40	42.2
25.3	0.00	59.6



We recommend the 150mm Wall Kit for easy through-wall installation. See page 118 for further information.

Part F V

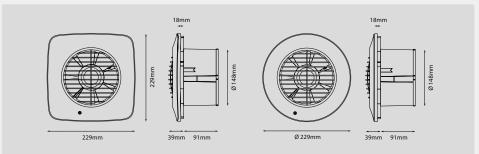

Product Features	DX150S	DX150TS	DX150PS	DX150HTS	DX150R	DX150TR	DX150PR	DX150HTR
Referemce Number	93070AW	93072AW	93074AW	93076AW	93071AW	93073AW	93075AW	93077AW
Design	Square	Square	Square	Square	Round	Round	Round	Round
Standard	1				1			
Timer (adjustable 30s – 30mins)		1		1		1		1
Pullcord			1				1	
Humidistat				1				1
Backdraught Shutter	1	1	1	1	1	1	1	1

www.xpelair.co.uk 35