

### 13 Amp Fused Connection Unit with RCD Protection


- IP66 rated
- FCU manufactured to BS1363-4
- RCD manufactured to BS7288.
- Latching type, 30mA trip current, 40ms trip speed
- Angled colour coded terminals with captive screws
- 1 drill out entry 20/25mm in rear face
- Flexible membrane allows switching without opening unit
- Visible indication of power status through see-through cover
- Terminal capacity 3x 2.5mm<sup>2</sup>, 2x 4.0mm<sup>2</sup> & 1x 6.0mm



Product Code	Description	Inner Carton	Outer Carton
WP55RCD	13 Amp, RCD protection (latching)	-	10

### Junction Box

- IP66 Rated
- 5 pole terminal block
- 10mm<sup>2</sup> wire capacity
- Multiple knockout – 1 on rear and three sides, 2 on one side
- Colour matched covers to seal the fixing screws
- Earth terminal in mounting box




Product Code	Description	Inner Carton	Outer Carton
WPJB	Junction box with 5 pole terminal block	-	10

### Empty Enclosures

- IP66 rated when in use
- Provides the ability to self-configure to suit the application
- Suitable for all products in the Nexus Moulded, Grid, Euro Module or Nexus Metal ranges

\*Not suitable for use with 20A switches and fused connection units with bottom flex outlet

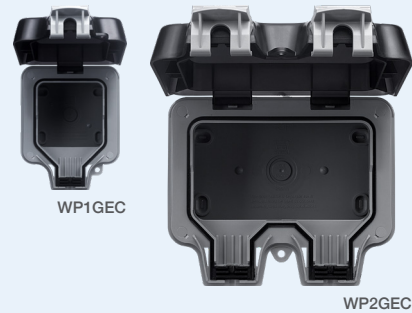

Product Code	Description	Outer Carton
WP1GEC	Single	10
WP2GEC	Double	10

### Empty Enclosure Example Configurations



WP2GEC fitted with 870

WP1GEC fitted with 8RJ451

WP2GEC fitted with 844

WP1GEC fitted with 852



## IP55 Weatherproof Range



### 10AX Switches

- IP55 Rated (with cover closed)
- 20mm & 25mm knock-outs in supplied mounting box
- Fixing centres with horizontal and vertical adjustment
- Manufactured to BS EN 60669-1
- Terminal capacity 4 x 1.0mm<sup>2</sup> 4 x 1.5mm<sup>2</sup> 2 x 2.5mm<sup>2</sup> 1 x 4.0mm<sup>2</sup>



Product Code	Description	Inner Carton	Outer Carton
WPB12	Single, 2 way	10	100
WPB42	Double, 2 way	10	100
WPB14	Single, bell push	10	100

### 13 Amp Socket Outlet

- IP55 Rated (with cover closed)
- 20mm & 25mm knock-outs in supplied mounting box
- Fixing centres with horizontal and vertical adjustment
- Manufactured to BS1363-2
- Terminal capacity 3 x 2.5mm<sup>2</sup> 3 x 4mm<sup>2</sup> 2 x 6.0mm<sup>2</sup>



Product Code	Description	Inner Carton	Outer Carton
WPB23	Single, 13 Amp, unswitched	10	100
WPB24	Double, 13 Amp, unswitched	5	50
WPB21	Single, 13 Amp, DP UK socket with single switch	5	50

### Fused Connection Unit

- IP55 Rated (with cover closed)
- 20mm & 25mm knock-outs in supplied mounting box
- Fixing centres with horizontal and vertical adjustment
- Double pole switch
- Manufactured to BS EN 60669-1
- Terminal capacity 4 x 1.0mm<sup>2</sup> 4 x 1.5mm<sup>2</sup> 2 x 2.5mm<sup>2</sup> 1 x 4.0mm<sup>2</sup>



Product Code	Description	Inner Carton	Outer Carton
WPB50	Single switched FCU	10	100