

13 Amp Switched Socket with USB Charger 2 X Outlets 2.1A

- Ideal for charging smartphones, tablets, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- 35mm box required (supplied with optional 10mm spacer for 25mm box retrofit)
- Twin earth fitted as standard – Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee




Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
FBS21U2W	FPC21U2W	-	Single switched socket + 2 x USB (2.1A), white insert	5	50
FBS21U2G	-	-	Single switched socket + 2 x USB (2.1A), grey insert	5	50
-	-	FBN21U2B	Single switched socket + 2 x USB (2.1A), black insert	5	50



13 Amp Switched Socket with USB Charger 2x Outlets 3.1A

- Ideal for charging smartphones, tablets, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- 35mm box required (supplied with optional 10mm spacer for 25mm box retrofit)
- Twin earth fitted as standard – Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee

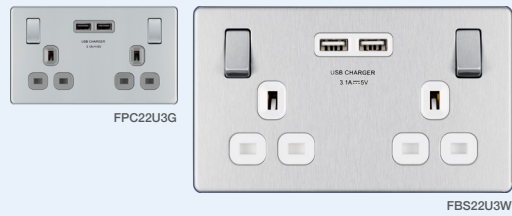

Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
FBS22U3W	FPC22U3W	-	Double switched socket + 2 x USB (3.1A), white insert	5	50
FBS22U3G	FPC22U3G	-	Double switched socket + 2 x USB (3.1A), grey insert	5	50
-	-	FBN22U3B	Double switched socket + 2 x USB (3.1A), black insert	5	50



13 Amp Switched Socket with USB Charger 4x Outlets 4.2A

- Ideal for charging smart phones, tablets, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- 35mm box required (supplied with optional 10mm spacer for 25mm box retrofit)
- Twin earth fitted as standard – Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee




Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
-	FPC24U44W	-	Double socket + 4 x USB (4.2A), white insert	5	50
FBS24U44G	FPC24U44G	-	Double socket + 4 x USB ((4.2A), grey insert	5	50
-	-	FBN24U44B	Double socket + 4 x USB (4.2A), black insert	5	50



13 Amp Socket Outlets

- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS 1363 Part 2
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²

*Insert colours = White (W), Grey (G) and Black (B) at the end of the product code

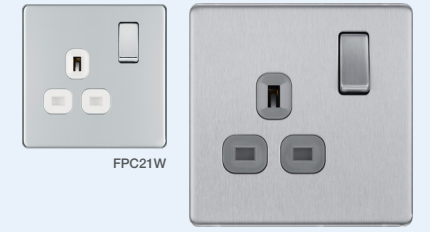

Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
FBS21G	FPC21G	FBN21B	Single switched socket	5	50
-	FPC21W	-	Single switched socket	5	50
FBS22G	FPC22G	FBN22B	Double switched socket	5	50
-	FPC22W	-	Double switched socket	5	50



10 Amp 10AX Switches

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Plate switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4
- Minimum mounting box depth:
 - Single and double 16mm
 - Triple and quadruple 25mm

*Bell push switch available made to order, contact Customer Services for details


Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
FBS12	FPC12	FBN12	Single, 2 way	5	50
FBS13	FPC13	FBN13	Intermediate	5	50
FBS14	FPC14	FBN14	Bell push switch*	5	50
FBS42	FPC42	FBN42	Double, 2 way	5	50
FBS43	FPC43	FBN43	Triple, 2 way	5	50
FBS44	FPC44	FBN44	Quadruple, 2 way	5	50



10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to IEC 60669-2-4
- Minimum mounting box depth: 25mm

Brushed Steel	Polished Chrome	Black Nickel	Description	Inner Carton	Outer Carton
FBS15	FPC15	FBN15	3 pole fan isolator	5	50
FBS15F	FPC15F	FBN15F	3 pole fused fan isolator	5	50

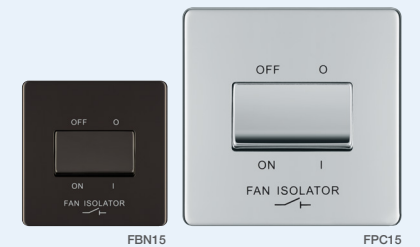

10AX Toggle Switches

- Single and double
- Available for projects
- Subject to conditions

