

10 Amp 10AX Switches

- All switches 10 Amp, 10AX inductive rated
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 16mm




SBS43



Brushed Steel	Description	Inner Carton	Outer Carton
SBS12	Single, 2 way	5	50
SBS13	Intermediate	5	50
SBS42	Double, 2 way	5	50
SBS43	Triple, 2 way	5	50

10 Amp 3 Pole Fan Isolator

- 10 Amp, triple pole
- Captive terminal screws
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to IEC 60669-2-4
- Minimum mounting box depth 16mm




SBS15



Brushed Steel	Description	Inner Carton	Outer Carton
SBS15	3 pole fan isolator	5	50

13 Amp Socket Outlets

- Manufactured to BS 1363 part 2
- Twin earth fitted as standard to allow double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Minimum mounting box depth 25mm
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²

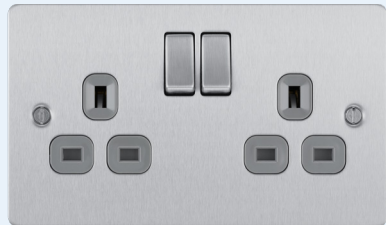

SBS22G



Brushed Steel	Description	Inner Carton	Outer Carton
SBS21G	Single, switched	5	50
SBS22G	Double, switched	5	50

20 Amp Double Pole Switches

- 20 Amp
- Terminal capacity 3 x 2.5mm² 2 x 4.0mm² 1 x 6.0mm²
- Colour coded terminals with backed out captive screws
- Manufactured to BS EN 60669-1
- Minimum mounting box depth 25mm



SBS31



Brushed Steel	Description	Inner Carton	Outer Carton
SBS31	20 Amp DP switch with power indicator	10	100

13 Amp Switched Socket with USB Charger – 2 x Outlets 2.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2
- 10 year guarantee



SBS22G

Brushed Steel	Description	Inner Carton	Outer Carton
SBS21U2G	Single socket + 2 x Type A USB (2.1A), grey insert	5	50

13 Amp Switched Socket with USB Charger – 2 x Outlets 3.1A

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2




SBS22U3G

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22U3G	Double SP switched socket, outboard rockers + 2 x Type A USB (3.1A), grey insert	5	50

13 Amp Switched Socket with USB A + C Charger 4.2A

- 1 x USB A and 1 x USB Type C - 4.2A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2



SBS22UACG

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22UACG	Double SP, switched, outboard rockers and 1 x A + 1 x C type outlets	5	50

13 Amp WiFi Extender Switched Socket Outlet

- 2 x Type A USB sockets – 2.1A total output, 5V
- Charges iPad, iPhone, tablets, mobiles, cameras and more
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm – ideal for retrofit
- Twin earth fitted as standard to allow a double earth facility for installations requiring high integrity protective connection Ref. BS 7671:2008
- Manufactured to BS1363-2



SBS22UWRG

Brushed Steel	Description	Inner Carton	Outer Carton
SBS22UWRG	Double SP, switched, outboard rockers, WiFi Extender	5	50