

10 Amp 3 Pole Fan Isolator Modules

- Simple secure 'locate & clip' fitting to frame
- Triple pole switching design (can also be used for double pole applications)
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 10 Amp rated



White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
R15	RPC15	RBS15	RBN15	3 pole fan isolator	10	100

Dimmer Modules

- Intelligent trailing edge dimmer module
- Soft start, smooth dimming control and silent operation
- 2 Way push on/off with rotary control
- Overload protection
- Suitable for LED, Halogen, CFL and Incandescent lamps
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm², 2 x 2.5mm² & 1 x 4.0mm²
- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm
- 200-250V AC




Load Rating (Max/Min per module)			
Dimmable LED	5-100W	Halogen	20-200W
Tungsten/Incandescent	5-200W	Dimmable Compact Fluorescent	5-100W

White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
RDTR	RPCDTR	RBSDTR	RBDNTR	2-way 200W trailing edge	10	100

Indicator Modules


- LED light source, reliable and low power consumption
- Simple secure 'locate and clip' fitting to frame
- Clearly marked terminals with backed out captive screws for easy installation
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Manufactured to BS 5733
- Minimum mounting box depth 25mm
- 250V

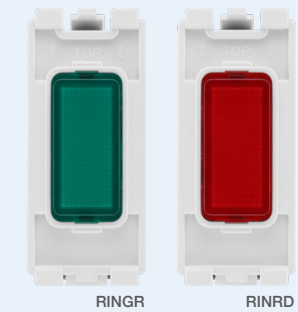

Product Code	Description	Inner Carton	Outer Carton
RINGR	Green	10	100
RINOR	Orange	10	100
RINRD	Red	10	100

Fused Modules

- Simple secure 'locate and clip' fitting to frame
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth 25mm
- Clearly marked terminals with backed out captive screws for easy installation
- Supplied with 13A fuse fitted to BS 1362



White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
RFUSE	RPCFUSE	RBSFUSE	RBNFUSE	Fuse holder	10	100

Flex Outlet Modules

- Cable entry with cord grip
- Suitable for cables with an outside diameter up to 10mm
- Manufactured to BS 5733
- Minimum mounting box depth 25mm



White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
RFLEX	RPCFLEX	RBSFLEX	RBNFLEX	Flex outlet (up to 10mm)	10	100

Blank Modules


- Ideal for inserting in to unused Grid apertures
- Simple secure 'locate & clip' fitting to frame



White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
RBLNK	RPCBLNK	RBSBLNK	RBNBLNK	Blank module	10	100

Front Plates – Nexus Moulded & Nexus Metal

- Front-plates match the power products for the White Moulded & Nexus Metal ranges
- No visible plastic around rockers
- White plates supplied with covers to conceal fixing screws
- Metal plates fitted with moisture control gasket
- Brushed steel with anti-fingerprint lacquer
- Easy to install, supplied with fixing screws
- Anti-Microbial properties on white moulded Grid plates

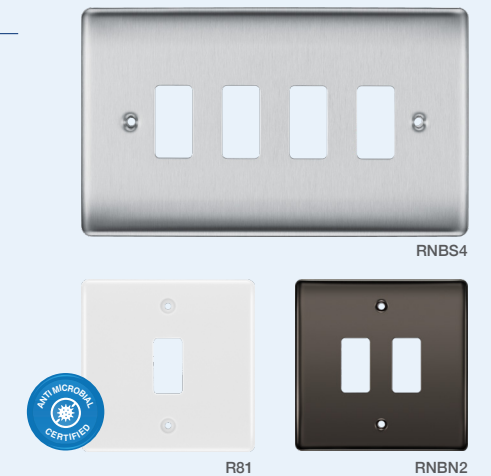

White	Polished Chrome	Brushed Steel	Black Nickel	Description	Inner Carton	Outer Carton
R81	RNPC1	RNBS1	RBNB1	1 module, square	20	200
R82	RNPC2	RNBS2	RBNB2	2 module, square	20	200
R83	RNPC3	RNBS3	RBNB3	3 module, rectangular	10	100
R84	RNPC4	RNBS4	RBNB4	4 module, rectangular	10	100
R86	RNPC6	RNBS6	RBNB6	6 module, square	10	100
R88	RNPC8	RNBS8	RBNB8	8 module, square	10	100
R89	-	RNBS9	-	9 module, rectangular	10	100
R812	-	RNBS12	-	12 module, rectangular	10	100