


OUTLINE DIMENSIONS

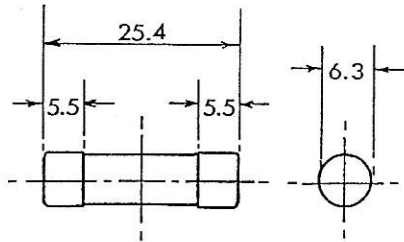

DIMENSIONS in mm

RATED CURRENTS

RATED CURRENT (A)	COLOUR CODE
1	BLACK
2	BLACK
3*	RED
5	BLACK
7	BLACK
10	BLACK
13*	BROWN

* PREFERRED RATED CURRENT

PERFORMANCE DATA

RATED VOLTAGE : 240V a.c.


RATED BREAKING CAPACITY : 6kA at 240V a.c.

RATED FREQUENCY : 50Hz

RATED POWER LOSS (ALL RATED CURRENTS) : LESS THAN 1.0W AT RATED CURRENT

The CONVENTIONAL TIME = 30m, hence for a fuse-link of RATED CURRENT I_n the CONVENTIONAL NON-FUSING CURRENT I_{nf} ($1.6I_n$) does not cause operation in 30m and the CONVENTIONAL FUSING CURRENT I_f ($1.9I_n$) does cause operation in 30m

TIME/CURRENT CHARACTERISTIC ENVELOPE

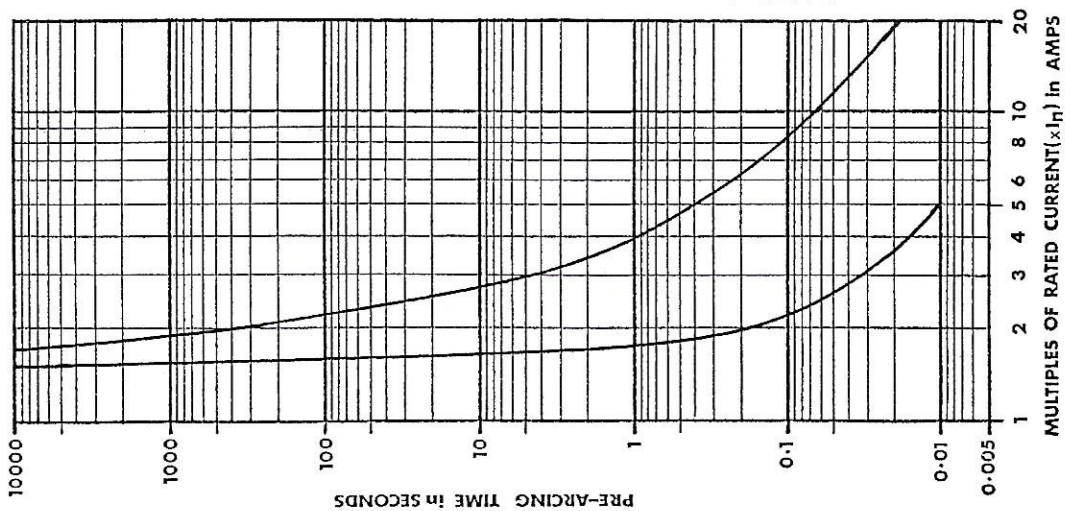

OUTLINE DIMENSIONS, RATED CURRENTS & PERFORMANCE DATA
TYPE " PL" PLUG TOP FUSE-LINKS to BS 1362:1973

SK480

LAWSON FUSES LIMITED

ISSUE

1

DATE

6.7.90

✓

CM