

Plan, install, and operate optimally

Operation – norm-compliant and safe

Hollow screw head equipped versions

In order to ease and increase your efficiency in signal loop verifications, our “STB” versions are equipped with tightening screws with hollow screw heads thus allowing direct and secure insertion of appropriate test probes in hands-free operations.



Signal loop testing

During your DCS marshalling signal loop checks, you can insert your probes need not only upstream and downstream the fuse in closed position you also can open the fuse carrier while your test probes are plugged. This allows you a make before break testing.



Additional marking and enhanced potential distribution possibility

You can use the multi-functional channel on the left to equip a marker holder or you can use it for a third cross-connection, providing one common feeding for adjoining feed through and disconnect terminals.




Endless strip marker

The endless strip marker fits perfectly on the terminal rail. Without any pitch the marker could be fixed over every terminal block as well as endplates in one line. Thus allowed absolutely flexibility during the planning, installation and operation phase. Additionally the strip markers offers a big marking area for multiple lines.



W2C 4 FT


4 mm²



Q3
2023

W2C 4 FT STB

4 mm²



Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 60 x 46
32 / 4
0.2...4

6.1 x 60 x 46
32 / 4
0.2...4

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

Note

Ordering data

Version	
	dark beige
	Blue
	Black

Note

Type	Qty.	Order No.
W2C 4 FT		2892650000
W2C 4 FT BL		2892660000
W2C 4 FT BK		2892670000

Type	Qty.	Order No.
W2C 4 FT STB		2892680000

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
	blue
	Black
End bracket	
	dark beige
Screwdriver	
	Standard
Marker holder	
	dark beige
Holder for cartridge fuse 5 x 20 mm	
	400 V AC/DC, without LED
	10 - 36 V AC/DC, red LED
	35 - 70 V AC/DC, red LED
	60 - 150 V AC/DC, red LED
	140 - 250 V AC/DC, red LED
Disconnect plug	
	orange
Module connector (max, 250 V)	
	without fittings
	With 1N4007 diode
	with wire jumper
Marking tags	
	WS 8/6 MM WS
	DEK 5/6 MM WS
	DEK 5/6 PLUS MC NE WS
	DEK 5/5 MC NE WS

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue



Signal marshalling
PUSH IN connection

W2C 4 FT-PE

4 mm²

W2C 4 FT-PE STB

4 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 72.5 x 46	
32 / 4	
0.2...4	

6.1 x 72.5 x 46	
32 / 4	
0.2...4	

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			
Note			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			
Note			

Ordering data

Version	dark beige Blue Black
Note	

Type	Qty.	Order No.
W2C 4 FT-PE		2892690000
Note		

Type	Qty.	Order No.
W2C 4 FT-PE STB		2892700000
Note		

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
	blue
	Black
End bracket	
	dark beige
Screwdriver	
	Standard
Marker holder	
	dark beige
Holder for cartridge fuse 5 x 20 mm	
	400 V AC/DC, without LED
	10 - 36 V AC/DC, red LED
	35 - 70 V AC/DC, red LED
	60 - 150 V AC/DC, red LED
	140 - 250 V AC/DC, red LED
Disconnect plug	
	orange
Module connector (max, 250 V)	
	without fittings
	With 1N4007 diode
	with wire jumper
Marking tags	
	WS 8/6 MM WS
	DEK 5/6 MM WS
	DEK 5/6 PLUS MC NE WS
	DEK 5/5 MC NE WS
For detailed information on other accessories and application in the online catalogue	


Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2		
WEW 35/2	50	1061200000
SDS 0.6X3.5X100		
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		
BZT W2C 4		2894270000
WS 8/6 MM WS		
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS		
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS		
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS		
DEK 5/5 MC NE WS	1000	1609801044
For detailed information on other accessories and application in the online catalogue		

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2		
WEW 35/2	50	1061200000
SDS 0.6X3.5X100		
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		
BZT W2C 4		2894270000
WS 8/6 MM WS		
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS		
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS		
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS		
DEK 5/5 MC NE WS	1000	1609801044
For detailed information on other accessories and application in the online catalogue		



W2C 4 DT

4 mm²



Q3
2023

6.1 x 60 x 48
20 / 4
0.2...4



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800			
32			
4			
8 kV / 3			
A3 / V-0			

Rated connection


0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2C 4 DT		2892740000
W2C 4 DT BL		2892750000
W2C 4 DT BK		2892760000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

W2C 4 DT STB

4 mm²



Q3
2023

6.1 x 60 x 48
20 / 4
0.2...4



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800			
32			
4			
8 kV / 3			
A3 / V-0			

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2C 4 DT STB		2892770000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

B




Signal marshalling
PUSH IN connection

W2C 4 DT W/O DTLV

4 mm²

Q3
2023



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 60 x 48
20 / 4
0.2...4

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
		8 kV / 3	
		A3 / V-0	

Rated connection	
0.5...4 / 0.5...4	
0.5...4 / 0.5...4	
0.5...1.5	
8 / 0.6 x 3.5 mm	

Note

Ordering data

Version	without isolator, dark beige without isolator, black without isolator, blue
---------	---

Note

Type	Qty.	Order No.
W2C 4 DT W/O DTLV		2892780000
W2C 4 DT W/O DTLV BK		2892800000
W2C 4 DT W/O DTLV BL		2892790000

Accessories

Plug-in cross-connection	2-pole 10-pole
--------------------------	-------------------

End plate	dark beige blue Black
-----------	-----------------------------

End bracket	dark beige
-------------	------------

Screwdriver	Standard
-------------	----------

Marker holder	dark beige
---------------	------------

Holder for cartridge fuse 5 x 20 mm	400 V AC/DC, without LED 10 - 36 V AC/DC, red LED 35 - 70 V AC/DC, red LED 60 - 150 V AC/DC, red LED 140 - 250 V AC/DC, red LED
-------------------------------------	---

Disconnect plug	orange
-----------------	--------

Module connector (max, 250 V)	without fittings With 1N4007 diode with wire jumper
-------------------------------	---

Marking tags

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000

Type	Order No.
WEP 2C 4	2894210000
WEP 2C 4 BL	2894220000
WEP 2C 4 BK	2894230000

Type	Qty.	Order No.
WEW 35/2	50	1061200000

Type	Qty.	Order No.
SDS 0.6X3.5X100	1	2749340000

Type	Order No.
BZT W2C 4	2894270000

Type	Qty.	Order No.
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000

Type	Qty.	Order No.
TNST OR	20 A 50	2463540000


Type	Qty.	Order No.
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000

Type	Qty.	Order No.
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue


W2C 4 DT-PE

4 mm²



W2C 4 DT-PE STB

4 mm²

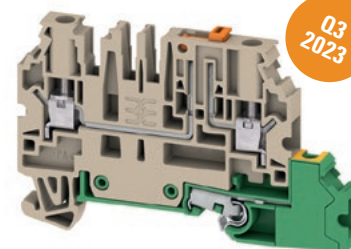

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 72.5 x 48	
20 / 4	
0.2...4	

6.1 x 72.5 x 48	
20 / 4	
0.2...4	

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
800			
32			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

Note

Ordering data

Version	
	dark beige
Note	

Type	Qty.	Order No.
W2C 4 DT-PE		2892810000

Type	Qty.	Order No.
W2C 4 DT-PE STB		2892820000

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
	blue
	Black
End bracket	
	dark beige
Screwdriver	
	Standard
Marker holder	
	dark beige
Holder for cartridge fuse 5 x 20 mm	
	400 V AC/DC, without LED
	10 - 36 V AC/DC, red LED
	35 - 70 V AC/DC, red LED
	60 - 150 V AC/DC, red LED
	140 - 250 V AC/DC, red LED
Disconnect plug	
	orange
Module connector (max, 250 V)	
	without fittings
	With 1N4007 diode
	with wire jumper
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
BZT W2C 4		2894270000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue



W2C 4 FS DB


4 mm²



Q3
2023

W2C 4 FS BL


4 mm²




Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 60 x 75
6.3 / 4
0.2...4



6.1 x 60 x 75
6.3 / 4
0.2...4



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	8 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

Note

Ordering data

Version	500 V AC/DC, without LED 10-36 V AC/DC, with LED 30-70 V AC/DC, with LED 60-150 V AC/DC, with LED 100 - 250 V AC/DC, with LED
Note	

Type	Qty.	Order No.
W2C 4 FS DB		2892900000
W2C 4 FS 10-36V DB		2892980000
W2C 4 FS 30-70V DB		2893010000
W2C 4 FS 60-150V DB		2893040000
W2C 4 FS 100-250V DB		2893080000

Type	Qty.	Order No.
W2C 4 FS BL		2892910000
W2C 4 FS 10-36V BL		2892990000
W2C 4 FS 30-70V BL		2893020000
W2C 4 FS 60-150V BL		2893050000
W2C 4 FS 100-250V BL		2893090000

Accessories

Plug-in cross-connection	2-pole 10-pole
End plate	dark beige blue Black
End bracket	dark beige
Screwdriver	Standard
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)	0.25 A fast 0.50 A fast 1.00 A fast 2.00 A fast
Marking tags	


Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2		
WEW 35/2	50	1061200000
SDS 0.6X3.5X100		
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F		
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS		
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS		
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS		
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS		
DEK 5/5 MC NE WS	1000	1609801044

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2		
WEW 35/2	50	1061200000
SDS 0.6X3.5X100		
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F		
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS		
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS		
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS		
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS		
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue


W2C 4 FS BK

4 mm²



Q3
2023

6.1 x 60 x 75
6.3 / 4
0.2...4



IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
8 kV / 3			
A3 / V-0			

Rated connection


0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2C 4 FS BK		2892920000
W2C 4 FS 10-36V BK		2893000000
W2C 4 FS 30-70V BK		2893030000
W2C 4 FS 60-150V BK		2893070000
W2C 4 FS 100-250V BK		2893110000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044


W2C 4 FS BK STB

4 mm²



Q3
2023

6.1 x 60 x 75
6.3 / 4
0.2...4



IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
8 kV / 3			
A3 / V-0			

Rated connection


0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2C 4 FS BK STB		2892930000
W2C 4 FS 10-36V BK STB		2892940000
W2C 4 FS 30-70V BK STB		2892950000
W2C 4 FS 60-150V BK STB		2892960000
W2C 4 FS 100-250V BK STB		2892970000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044


W2C 4 FS-PE BK

4 mm²



Q3
2023

6.1 x 72.5 x 75
6.3 / 4
0.2...4



IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
8 kV / 3			
A3 / V-0			

Rated connection


0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2C 4 FS-PE BK		2893120000
W2C 4 FS-PE 10-36V BK		2893140000
W2C 4 FS-PE 30-70V BK		2893150000
W2C 4 FS-PE 60-150V BK		2893160000
W2C 4 FS-PE 100-250V BK		2893170000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

W2C 4 FS-PE BK STB


4 mm²



Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 72.5 x 75
6.3 / 4
0.2...4



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
		8 kV / 3	
		A3 / V-0	

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Note

Ordering data

Version
500 V AC/DC, without LED
10-36 V AC/DC, with LED
30-70 V AC/DC, with LED
60-150 V AC/DC, with LED
100 - 250 V AC/DC, with LED

Note

Type	Qty.	Order No.
W2C 4 FS-PE BK STB		2893130000
W2C 4 FS-PE 10-36V BK STB		2893180000
W2C 4 FS-PE 30-70V BK STB		2893190000
W2C 4 FS-PE 60-150V BK STB		2893200000
W2C 4 FS-PE 100-250V BK STB		2893210000

Accessories


Plug-in cross-connection	2-pole 10-pole
End plate	dark beige blue Black
End bracket	dark beige
Screwdriver	Standard
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)	0.25 A fast 0.50 A fast 1.00 A fast 2.00 A fast
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044


For detailed information on other accessories and application in the online catalogue

W2T 4 DT-FT

4 mm²




6.1 x 95.5 x 72.5
20 / 4
0.2...4




W2T 4 DT-FT STB

4 mm²



6.1 x 95.5 x 72.5
20 / 4
0.2...4



Width/Height/Depth mm
max. current / max. cond. cross-section A/mm²
Max. clamping range mm²

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version	
	dark beige
	Blue
	Black

Note

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
Vertical jumpers	
End plate	1-pole
	dark beige
	blue
	Black
End bracket	dark beige
Screwdriver	Standard
Holder for cartridge fuse 5 x 20 mm	
	400 V AC/DC, without LED
	10 - 36 V AC/DC, red LED
	35 - 70 V AC/DC, red LED
	60 - 150 V AC/DC, red LED
	140 - 250 V AC/DC, red LED
Disconnect plug	orange
Module connector (max, 250 V)	
	without fittings
	With 1N4007 diode
	with wire jumper
Marking tags	
For detailed information on other accessories and application in the online catalogue	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
32			
4			
	6 kV / 3		
	A3 / V-0		

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2T 4 DT-FT		2893690000
W2T 4 DT-FT BL		2893700000
W2T 4 DT-FT BK		2893710000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
ZVQ 2.5/1.5	24 A 50	1720700000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
32			
4			
	6 kV / 3		
	A3 / V-0		

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm


Type	Qty.	Order No.
W2T 4 DT-FT STB		2893720000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
ZVQ 2.5/1.5	24 A 50	1720700000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044



W2T 4 DT-FT-PE


4 mm²



Q3
2023

W2T 4 DT-FT-PE STB


4 mm²




Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 106.5 x 72.5
20 / 4
0.2...4



6.1 x 106.5 x 72.5
20 / 4
0.2...4



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
500			
32			
4			
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			
Note			

IEC 60947-7-1			
IEC	UL	CSA	EN 60079-7
500			
32			
4			
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			
Note			

Ordering data

Version	dark beige Blue Black
Note	

Type	Qty.	Order No.
W2T 4 DT-FT-PE		2893730000
Note		

Type	Qty.	Order No.
W2T 4 DT-FT-PE STB		2893740000
Note		

Accessories


Plug-in cross-connection	2-pole 10-pole
Vertical jumpers	
End plate	1-pole dark beige blue Black
End bracket	dark beige
Screwdriver	Standard
Holder for cartridge fuse 5 x 20 mm	400 V AC/DC, without LED 10 - 36 V AC/DC, red LED 35 - 70 V AC/DC, red LED 60 - 150 V AC/DC, red LED 140 - 250 V AC/DC, red LED
Disconnect plug	orange
Module connector (max, 250 V)	without fittings With 1N4007 diode with wire jumper
Marking tags	
For detailed information on other accessories and application in the online catalogue	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
ZVQ 2.5/1.5	24 A 50	1720700000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044
Note		

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
ZVQ 2.5/1.5	24 A 50	1720700000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044
Note		

W2T 4 FS-FT DB


4 mm²



Q3
2023

W2T 4 FS-FT BL

4 mm²



Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 95.5 x 99.5
6.3 / 4
0.2...4

6.1 x 95.5 x 99.5
6.3 / 4
0.2...4

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	6 kV / 3		
	A3 / V-0		
Rated connection			
0.5...4 / 0.5...4			
0.5...4 / 0.5...4			
0.5...1.5			
8 / 0.6 x 3.5 mm			

Note

Ordering data

Version	
500 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	
Note	

Type	Qty.	Order No.
W2T 4 FS-FT DB		2893850000
W2T 4 FS-FT 10-36V DB		2893880000
W2T 4 FS-FT 30-70V DB		2893910000
W2T 4 FS-FT 60-150V DB		2893940000
W2T 4 FS-FT 100-250V DB		2893970000

Type	Qty.	Order No.
W2T 4 FS-FT BL		2893860000
W2T 4 FS-FT 10-36V BL		2893890000
W2T 4 FS-FT 30-70V BL		2893920000
W2T 4 FS-FT 60-150V BL		2893950000
W2T 4 FS-FT 100-250V BL		2893980000

Accessories

Plug-in cross-connection	
2-pole	
10-pole	
End plate	
dark beige	
blue	
Black	
End bracket	
dark beige	
Screwdriver	
Standard	
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)	
0.25 A fast	
0.50 A fast	
1.00 A fast	
2.00 A fast	
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044


Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue



W2T 4 FS-FT BK


4 mm²



Q3
2023

W2T 4 FS-FT BK STB

4 mm²



Q3
2023

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 95.5 x 99.5
6.3 / 4
0.2...4

6.1 x 95.5 x 99.5
6.3 / 4
0.2...4

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	6 kV / 3		
	A3 / V-0		

IEC 60947-7-3			
IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
	6 kV / 3		
	A3 / V-0		

Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

Rated connection	
0.5...4 / 0.5...4	
0.5...4 / 0.5...4	
0.5...1.5	
8 / 0.6 x 3.5 mm	

Rated connection	
0.5...4 / 0.5...4	
0.5...4 / 0.5...4	
0.5...1.5	
8 / 0.6 x 3.5 mm	

Note

Ordering data

Version	500 V AC/DC, without LED 10-36 V AC/DC, with LED 30-70 V AC/DC, with LED 60-150 V AC/DC, with LED 100 - 250 V AC/DC, with LED
Note	

Type	Qty.	Order No.
W2T 4 FS-FT BK		2893870000
W2T 4 FS-FT 10-36V BK		2893900000
W2T 4 FS-FT 30-70V BK		2893930000
W2T 4 FS-FT 60-150V BK		2893960000
W2T 4 FS-FT 100-250V BK		2893990000

Type	Qty.	Order No.
W2T 4 FS-FT BK STB		2894000000
W2T 4 FS-FT 10-36V BK STB		2894010000
W2T 4 FS-FT 30-70V BK STB		2894020000
W2T 4 FS-FT 60-150V BK STB		2894030000
W2T 4 FS-FT 100-250V BK STB		2894040000

Accessories

Plug-in cross-connection	2-pole 10-pole
End plate	dark beige blue Black
End bracket	dark beige
Screwdriver	Standard
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)	0.25 A fast 0.50 A fast 1.00 A fast 2.00 A fast
Marking tags	


Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

For detailed information on other accessories and application in the online catalogue


W2T 4 FS-FT-PE BK

4 mm²



Q3
2023

6.1 x 106.5 x 99.5
6.3 / 4
0.2...4



IEC 60947-7-3


IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
6 kV / 3			
A3 / V-0			

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm


W2T 4 FS-FT-PE BK STB

4 mm²



Q3
2023

6.1 x 106.5 x 99.5
6.3 / 4
0.2...4



IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
250			
6.3			
4			
6 kV / 3			
A3 / V-0			

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
0.5...1.5
8 / 0.6 x 3.5 mm

Type	Qty.	Order No.
W2T 4 FS-FT-PE BK		2894050000
W2T 4 FS-FT-PE 10-36V BK		2894060000
W2T 4 FS-FT-PE 30-70V BK		2894070000
W2T 4 FS-FT-PE 60-150V BK		2894080000
W2T 4 FS-FT-PE 100-250V BK		2894090000

Type	Qty.	Order No.
W2T 4 FS-FT-PE BK STB		2894100000
W2T 4 FS-FT-PE 10-36V BK STB		2894110000
W2T 4 FS-FT-PE 30-70V BK STB		2894120000
W2T 4 FS-FT-PE 60-150V BK STB		2894130000
W2T 4 FS-FT-PE 100-250V BK STB		2894140000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
WEP 2C 4		2894210000
WEP 2C 4 BL		2894220000
WEP 2C 4 BK		2894230000
WEW 35/2	50	1061200000
SDS 0.6X3.5X100	1	2749340000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000
WS 8/6 MM WS	600	2007160000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 PLUS MC NE WS	1000	1011320000
DEK 5/5 MC NE WS	1000	1609801044

B

