


ZTPE 4/2AN/1

4 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm ²
Max. clamping range	mm ²

6.5 x 58 x 43
/ 6
0.13...6



Technical data

Rated data	
Rated voltage	V
Max. voltage of clamp support & pluggable system	V
Rated short-time current	
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version
Green/yellow
Note

Accessories

End plate / Partition plate	
dark beige	
Orange	
Test adapter	
Standard	
Miscellaneous accessories WeiCoS	
Locking element	
Coding element	
Strain relief	
Screwdriver	
Standard	
Marking tags	
DIN A4 sheets	
Paper	
Protective strip	

In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500			
800			
480 (4 mm ²)			
4	AWG 26...10	AWG 26...10	
	/ 3		
	A3 / V-0		
Rated connection		Plug-in connection	
0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

CE


UL

CSA


EN

ZTPE 4/4AN/2

4 mm²

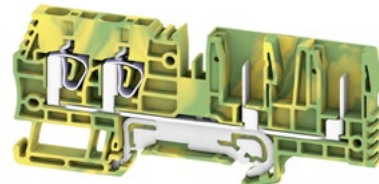

6.5 x 100.5 x 43
/ 6
0.13...6



In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500			
800			
480 (4 mm ²)			
4	AWG 26...10	AWG 26...10	
	/ 3		
	A3 / V-0		
Rated connection		Plug-in connection	
0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

CE

UL

CSA

EN

Type	Qty.	Order No.
ZTPE 4/2AN/1	50	1854970000
Type	Qty.	Order No.
ZTPE 4/4AN/2	50	1848330000

Type		Qty.	Order No.
ZAP/TW ZT4/4AN/2		50	1848360000
ZTA ZT2.5	17.5 A	25	1827080000
ZVR ZP4		25	1855250000
KOSF ZT4		50	1856860000
ZZE ZP4		25	1855260000
SDIS SLIM 0.6X3.5X100		1	2749610000
DEK 5/6 MC NE WS		1000	1609820000
WS 10/6 MC NE WS		600	1828450000
DEK 5/6 MM WS		600	2007120000
ESO 7 DIN A4 WS		10	1607720000
STR 7 F.SCHT 7		20	0515300000

For detailed information on other accessories and application in the online catalogue