

AFS 4 2C

4 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 74 x 68
6.3 / 6
0.14...6



Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	

Note

DIN EN 60947-7-3 Ex ec II C Gc Ex II 3 G D

IEC	UL	CSA	EN 60079-7
500	150 (C)	150 (C)	
6.3	10	10	6.3
4	AWG 26...10	AWG 26...10	4 mm ²
4 kV / 3			
A4 / V-0			
TUEV17ATEX8064U			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

Arrangement	Applications			
	Only short-circuit protection		Overload	
	T _A max.	Nominal values	T _A max.	Nominal values
Individual	41 °C	4,0 W / 6,3 A	31 °C	1,6 W / 6,3 A
In combination	32 °C	2,5 W / 6,3 A	34 °C	1,6 W / 6,3 A

Ordering data

Version	
500 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	
Note	

Type	Qty.	Order No.
AFS 4 2C BK	50	2429860000
AFS 4 2C 10-36V BK	50	2429870000
AFS 4 2C 30-70V BK	50	2434350000
AFS 4 2C 60-150V BK	50	2434380000
AFS 4 2C 100-250V BK	50	2434390000

Accessories

Plug-in cross-connection	
2-pole	
10-pole	
End plate	
Black	
Test plug	
Terminal blocks identical in contour	
Screwdriver	
Standard	
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 3C 4 BK	20	2486640000
PS 2.0 MC	20	0310000000
A3C 4	32 A 50	2051240000
A3C 4 PE	50	2051410000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

G-fuse cartridge, 5 x 20 mm (IEC 60127-2)

0.25 A fast
0.50 A fast
1.00 A fast
2.00 A fast

For detailed information on other accessories and application in the online catalogue

Spring connection with PUSH IN technology (A series) Fuse terminals blocks

AFS 4 2C BK/BL 4 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 74 x 68
6.3 / 6
0.14...6



Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	
Note	

DIN EN 60947-7-3

IEC	UL	CSA	EN 60079-7
500	150 (C)	150 (C)	
6.3	10	10	6.3
4	AWG 26...10	AWG 26...10	4 mm ²
4 kV / 3			
A4 / V-0			
TUEV17ATEX8064U			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			
Note			

Arrangement	Applications			
	Only short-circuit protection		Overload	
	T _A max.	Nominal values	T _A max.	Nominal values
Individual	41 °C	4,0 W / 6,3 A	31 °C	1,6 W / 6,3 A
In combination	32 °C	2,5 W / 6,3 A	34 °C	1,6 W / 6,3 A

Ordering data

Version
500 V AC/DC, without LED
Note

Type	Qty.	Order No.
AFS 4 2C BK/BL	50	2548140000

Accessories


Plug-in cross-connection
2-pole
10-pole
End plate
Black
Test plug
Terminal blocks identical in contour
Screwdriver
Standard
Marking tags
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)
0.25 A fast
0.50 A fast
1.00 A fast
2.00 A fast

Type	Qty.	Order No.
ZQV 4N/2	32 A	60 1527930000
ZQV 4N/10	32 A	20 1528090000
AEP 3C 4 BK	20	2486640000
PS 2.0 MC	20	0310000000
A3C 4	32 A	50 2051240000
A3C 4 PE	50	2051410000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A	10 0430500000
G 20/0.50A/F	0.5 A	10 0430600000
G 20/1.00A/F	1 A	10 0430700000
G 20/2.00A/F	2 A	10 0430900000

For detailed information on other accessories and application in the online catalogue


A2T 4 FS-FT

4 mm²

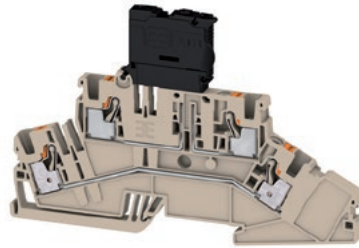

A2T 4 FS-FT-PE

4 mm²

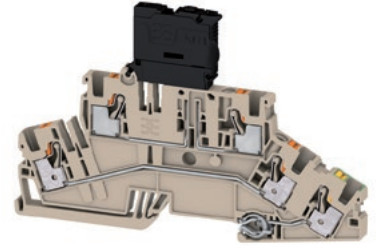

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 126.5 x 83.5	
6.3 / 6	
0.14...6	

6.1 x 126.5 x 83.5	
6.3 / 6	
0.14...6	

Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	

IEC 60947-7-3, IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
6.3			
4			
	6 kV / 3		
	A4 / V-0		
C E			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

IEC 60947-7-1, IEC 60947-7-2, IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
500			
6.3			
4			
	6 kV / 3		
	A4 / V-0		
C E			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

Note

Ordering data

Version	
500 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	
Note	

Type	Qty.	Order No.
A2T 4 FS-FT	50	2831500000

Type	Qty.	Order No.
A2T 4 FS-FT-PE	50	2831510000

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
Test plug	
Terminal blocks identical in contour	
Screwdriver	
	Standard
Marking tags	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
PS 2.0 MC	20	0310000000
A2T 4 DT-FT	20 A 50	2831520000
A2T 4 DT-FT-PE	20 A 50	2831530000
A2T 4 FS-FT-PE	6.3 A 50	2831510000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
PS 2.0 MC	20	0310000000
A2T 4 DT-FT	20 A 50	2831520000
A2T 4 DT-FT-PE	20 A 50	2831530000
A2T 4 FS-FT	6.3 A 50	2831500000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

G-fuse cartridge, 5 x 20 mm (IEC 60127-2)

0.25 A fast
0.50 A fast
1.00 A fast
2.00 A fast

For detailed information on other accessories and application in the online catalogue




Spring connection with PUSH IN technology (A series)

Fuse terminals blocks

A2T 4 FS-FT BK

4 mm²

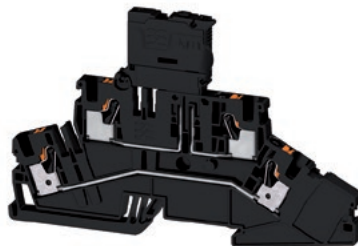

A2T 4 FS-FT-PE BK

4 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 126.5 x 83.5	
6.3 / 6	
0.14...6	

6.1 x 126.5 x 83.5	
6.3 / 6	
0.14...6	

Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	
Note	

IEC 60947-7-3, IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500			
6.3			
4			
	6 kV / 3		
	A4 / V-0		
C E			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

IEC 60947-7-1, IEC 60947-7-2, IEC 60947-7-3

IEC	UL	CSA	EN 60079-7
500			
6.3			
4			
	6 kV / 3		
	A4 / V-0		
C E			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			

Ordering data

Version	
500 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	
Note	

Type	Qty.	Order No.
A2T 4 FS-FT BK	50	2816960000
A2T 4 FS-FT 10-36V BK	50	2816970000
A2T 4 FS-FT 30-70V BK	50	2816980000
A2T 4 FS-FT 60-150V BK	50	2816990000
A2T 4 FS-FT 100-250V BK	50	2817000000

Type	Qty.	Order No.
A2T 4 FS-FT-PE BK	50	2817010000
A2T 4 FS-FT-PE 10-36V BK	50	2817020000
A2T 4 FS-FT-PE 30-70V BK	50	2817030000
A2T 4 FS-FT-PE 60-150V BK	50	2817040000
A2T 4 FS-FT-PE 100-250V BK	50	2817050000

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
Test plug	
Terminal blocks identical in contour	
Screwdriver	
	Standard
Marking tags	
G-fuse cartridge, 5 x 20 mm (IEC 60127-2)	
	0.25 A fast
	0.50 A fast
	1.00 A fast
	2.00 A fast
For detailed information on other accessories and application in the online catalogue	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
PS 2.0 MC	20	0310000000
A2T 4 DT-FT	20 A 50	2831520000
A2T 4 DT-FT-PE	20 A 50	2831530000
A2T 4 FS-FT-PE BK	6.3 A 50	2817010000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
PS 2.0 MC	20	0310000000
A2T 4 DT-FT	20 A 50	2831520000
A2T 4 DT-FT-PE	20 A 50	2831530000
A2T 4 FS-FT BK	6.3 A 50	2816960000
SDIL 0,6X3,5X100	1	2749140000
DEK 5/6 PLUS MC NE WS	1000	1011320000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000