



A2T 4 DT-FT

4 mm²

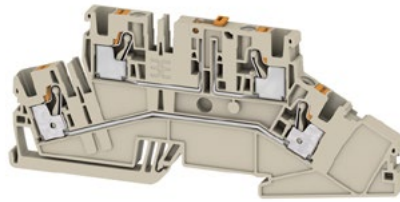

A2T 4 DT-FT-PE

4 mm²

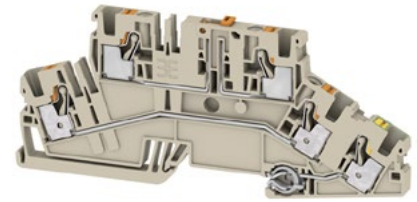

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 126.5 x 56.5	
20 / 6	
0.14...6	

6.1 x 126.5 x 56.5	
20 / 6	
0.14...6	

Technical data

Rated data	
Rated voltage of feed-through terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Number of operating cycles	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

IEC 60947-7-1, IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
250			
20			
4			
	6 kV / 3		
	A4 / V-0		
C €			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			
Note			

IEC 60947-7-1, IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
250			
20			
4			
	6 kV / 3		
	A4 / V-0		
C €			
Rated connection			
0.5...4 / 0.5...6			
0.5...6 / 0.5...4			
12 / 0.6 x 3.5 mm			
Note			

Ordering data

Version	
	dark beige
	without isolator, dark beige
Note	

Type	Qty.	Order No.
A2T 4 DT-FT	50	2831520000
A2T 4 DT-FT W/O DTLV	50	2831540000
Note		

Type	Qty.	Order No.
A2T 4 DT-FT-PE	50	2831530000
A2T 4 DT-FT-PE W/O DTLV	50	2831550000
Note		

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate	
	dark beige
End bracket	
	dark beige, screwable
	dark beige, direct mounting
Test adapter	
	1-pole
	stackable
Screwdriver	
	Standard
Marking tags	
Holder for cartridge fuse 5 x 20 mm	
	400 V AC/DC, without LED
	10 - 36 V AC/DC, red LED
	35 - 70 V AC/DC, red LED
	60 - 150 V AC/DC, red LED
	140 - 250 V AC/DC, red LED
Disconnect plug	
	orange
	removable, as replacement for release lever
Module connector (max, 250 V)	
	without fittings
	With 1N4007 diode
	with wire jumper
For detailed information on other accessories and application in the online catalogue	

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 MHR	0.2 A 50	1991860000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
TNST	20 A 50	1833090000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
Note		

Type	Qty.	Order No.
ZQV 4N/2	32 A 60	1527930000
ZQV 4N/10	32 A 20	1528090000
AEP 2T 4 FS	20	2817060000
AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 VO	20	2661280000
ATPG 1.5-10 L	0.2 A 50	1991890000
ATPG 4 MHR	0.2 A 50	1991860000
SDIL 0,6X3,5X100	1	2749140000
WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000
SIHA 3/G20	6.3 A 25	7921560000
SIHA 3/G20/LD 10-36V	25	7921570000
SIHA 3/G20/LD 35-70V	25	7921580000
SIHA 3/G20/LD 60-150V	25	7921590000
SIHA 3/G20/LD 140-250V	25	7921600000
TNST OR	20 A 50	2463540000
TNST	20 A 50	1833090000
BEST	50	1833100000
BEST/D	1 A 50	1878560000
BEST/DRBR	22 A 50	1878570000
Note		