


Instrument transformer wiring
Screw connection

Test-disconnect terminal blocks

WTL 35

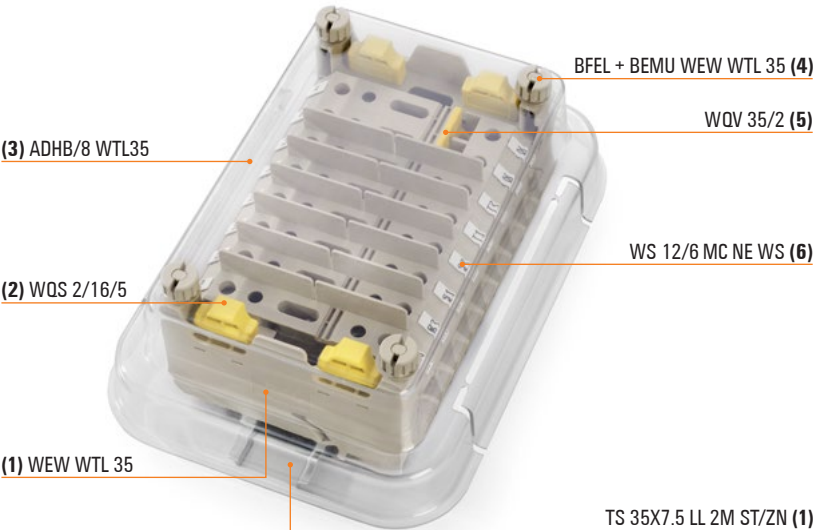

B


Ordering data

Pos.	Type	Order No.	Qty.
1	WEW WTL 35	1925040000	10
2	WQS 2/16/5	1925070000	10
3	ADHB/8 WTL35	2334730000	25
4	BFEL + BEMU WEW WTL 35	1964820000	20
5	WQV 35/2	1053060000	50
6	WS 12/6 MC NE WS	1609900000	600
7	TS 35X7.5 LL 2M ST/ZN	0514500000	2





WTL 35

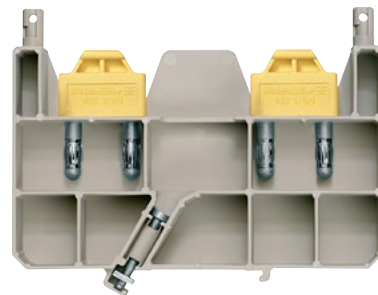
35 mm²

Width/Height/Depth	mm
max. current / max. cond. cross-section	A
Max. clamping range	mm ²

16 x 100 x 67.5

125 / 35

4...35



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Tightening torque / Clamping screw	-
Tightening torque Separating screw	Nm
Stripping length / Blade size	mm/-

IEC	UL	CSA	EN 60079-7
500			
125			
35			
	6 kV / 3		
	B9 / V-0		

CE

Rated connection

4...16 / 10...35
4...35 / 4...35
/ (M 6)
1.7...2.4
18 / 6.5 x 1.2 mm

Note

Ordering data

Version
with 2 sockets
With socket
with Socket

Note

Type	Qty.	Order No.
WTL 35/1STB/WQV	10	1925050000
WTL 35/2STB	10	1925030000
WTL 35/1STB	10	1925060000

Accessories

Screwable cross-connection
2-pole
End bracket
dark beige
Cover
Fastenings
Screwdriver
Standard
Marking tags

Type	Qty.	Order No.
WQV 35/2	138 A	50
WQS 2/16/5	44 A	10
WEW WTL 35	10	1925040000
ADHB/8 WTL35	25	2334730000
BFEL + BEMU WEW WTL 35	20	1964820000
SDS 1.2X6.5X150	1	2749390000
WS 12/6 MC NE WS	600	1609900000

For detailed information on other accessories and application in the online catalogue

B

