


Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 2.5


2.5 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 59.5 x 38.5
30 / 4
0.05...4



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Plug-in cross-connection	
	2-pole
	4-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZDU 2.5/3AN

2.5 mm²

Three connections



5.1 x 64.5 x 38.5
31 / 4
0.05...4



Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note	
------	--

Version	
	dark beige
	Blue
Note	


Type	Qty.	Order No.
ZDU 2.5/2	24 A 60	1608860000
ZDU 2.5/10	24 A 20	1608940000
ZAP/TW 1	50	1608740000
ZAP/TW 1 BL	50	1608750000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/VO	1000	1614290000
ZAD 1/4	20	1609110000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue

ZDU 2.5/4AN

2.5 mm²

Four connections

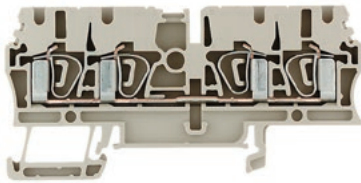

5.1 x 79.5 x 38.5
27 / 4
0.05...4



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
24	25	27	22
2.5	AWG 30...12	AWG 26...12	4 mm ²

8 kV / 3

A3 / V-0

DEMKO15ATEX1467U

Rated connection

0.5...4


0.5...4 / 0.5...2.5

10 / 0.6 x 3.5 mm


ZDU 2.5/2x2AN

2.5 mm²

Two potentials feasible



5.1 x 79.5 x 38.5
30 / 4
0.05...4



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
24	25	27	21
2.5	AWG 26...12	AWG 26...12	4 mm ²

8 kV / 3

A3 / V-0

DEMKO15ATEX1567U

Rated connection

0.5...4

0.5...4 / 0.5...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDU 2.5/4AN	100	1608570000
ZDU 2.5/4AN BL	100	1608580000

Type	Qty.	Order No.
ZDU 2.5/2x2AN	100	1608600000
ZDU 2.5/2x2AN BL	100	1608610000

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW 3	50	1608800000
ZAP/TW 3 BL	50	1608810000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/V0	1000	1614290000
ZAD 1/4	20	1609110000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

Type	Qty.	Order No.
ZAP/TW 3	50	1608800000
ZAP/TW 3 BL	50	1608810000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/V0	1000	1614290000
ZAD 1/4	20	1609110000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000


Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 4

4 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 62 x 43

41 / 6

0.13...6



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Plug-in cross-connection	
	2-pole
	4-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZDU 4/3 AN

4 mm²

Three connections



6.1 x 83.5 x 43

41 / 6

0.13...6



IEC 60947-7-1		Ex eb II	C Gb		II 2 G D
IEC	UL	CSA	EN 60079-7		
800		600	550		
32		35	28		
4		AWG 26...10	6 mm²		
8 kV / 3					
A4 / V-0					
       		DEMKO15ATEX1467U			
Rated connection					
0.5...6 / 0.5...6					
0.5...6 / 0.5...4					
12 / 0.6 x 3.5 mm					

Type	Qty.	Order No.
ZDU 4/3AN	50	7904180000
ZDU 4/3AN BL	50	7904190000

Type		Qty.	Order No.
ZQV 4/2 GE	32 A	60	1608950000
ZQV 4/10 GE	32 A	20	1609030000
ZAP/TW 4/3AN		20	7904100000
ZAP/TW 4/3AN BL		20	7904110000
ZEW 35		20	9540000000
ZTA 2 ZDU4	9 A	25	1609060000
ZTA 2/ZA ZDU4	9 A	25	1609070000
SDIS SLIM 0.6X3.5X100		1	2749610000
ZRH 4/1 WS		1000	1636640000
ZAD 2/4		20	1609080000
DEK 5/6 MC NE WS		1000	1609820000
WS 8/6 MM WS		600	2007160000
DEK 5/6 MM WS		600	2007120000

ZDU 4/4 AN

4 mm²

Four connections



6.1 x 104.5 x 43
41 / 6
0.13...6



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800		600	550
32		35	28
4		AWG 26...10	6 mm ²

8 kV / 3
A4 / V-0

DEMKO15ATEX1467U

Rated connection

0.5...6 / 0.5...6
0.5...6 / 0.5...4
12 / 0.6 x 3.5 mm


Type	Qty.	Order No.
ZDU 4/4AN	50	7904290000
ZDU 4/4AN BL	50	7904300000

Type	Qty.	Order No.
ZQV 4/2 GE	32 A 60	1608950000
ZQV 4/10 GE	32 A 20	1609030000
ZAP/TW4/4AN	20	7904210000
ZAP/TW4/4AN BL	20	7904220000
ZEW 35	20	9540000000
ZTA 2 ZDU4	9 A 25	1609060000
ZTA 2/ZA ZDU4	9 A 25	1609070000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 4/1 WS	1000	1636640000
ZAD 2/4	20	1609080000
DEK 5/6 MC NE WS	1000	1609820000
WS 12/6 MC NE WS	600	1609900000

ZDU 6

6 mm²

Two connections



8.1 x 65 x 45
57 / 10
0.22...10



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
41	50	50	39
6	AWG 22...8	AWG 20...8	10 mm ²

8 kV / 3
A5 / V-0

DEMKO15ATEX1467U

Rated connection

0.5...10
0.5...10 / 0.5...6
13 / 1.0 x 5.5 mm

Type	Qty.	Order No.
ZDU 6	50	1608620000
ZDU 6 BL	50	1608630000


1000 V DC rated voltage tested.

Type	Qty.	Order No.
ZQV 6/2 GE	41 A 60	1627850000
ZQV 6/4 GE	41 A 60	1627870000
ZAP/TW 5	50	1608830000
ZAP/TW 5 BL	50	1608840000
ZEW 35	20	9540000000
ZTA 3 ZDU6	9 A 25	1654050000
SDS 1.0X5.5X150	1	2749380000
ZAD 3/4	20	1609120000
DEK 5/8 MC NE WS	800	1856740000
WS 12/6 MC NE WS	600	1609900000
DEK 5/8 MM WS	500	2007130000
WS 8/8 MM WS	500	2007170000


ZDU 6/3 AN

6 mm²

Three connections



8.1 x 90 x 45
57 / 10
0.22...10



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
41	50	50	39
6	AWG 22...8	AWG 20...8	10 mm ²

8 kV / 3
A5 / V-0

DEMKO15ATEX1467U

Rated connection

0.5...10
0.5...6 / 0.5...6
13 / 1.0 x 5.5 mm

Type	Qty.	Order No.
ZDU 6/3AN	50	7907410000
ZDU 6/3AN BL	50	7907420000

Type	Qty.	Order No.
ZQV 6/2 GE	41 A 60	1627850000
ZQV 6/4 GE	41 A 60	1627870000
ZAP/TW6/3AN	20	7907370000
ZAP/TW6/3AN BL	20	7907380000
ZEW 35	20	9540000000
ZTA 3 ZDU6	9 A 25	1654050000
SDS 1.0X5.5X150	1	2749380000
ZAD 3/4	20	1609120000
DEK 5/8 MC NE WS	800	1856740000
WS 12/6 MC NE WS	600	1609900000
DEK 5/8 MM WS	500	2007130000
WS 8/8 MM WS	500	2007170000


Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 10

10 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

10 x 73.5 x 49.5

72 / 16

1.31...16



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Plug-in cross-connection	
	2-pole
	4-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Testing / Checking	
	Test plug
Screwdriver	
	Standard
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZDU 10/3AN

10 mm²

Three connections

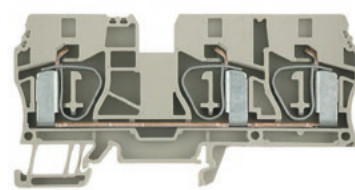

10 x 99 x 49.5

57 / 16

1.31...16



IEC 60947-7-1			
Ex eb II C Gb II 2 G D			
IEC	UL	CSA	EN 60079-7
800	600	600	690
57	60	55	51
10	AWG 16...6	AWG 16...6	16 mm ²
8 kV / 3			
A6 / V-0			
DEMKO15ATEX1467U			
Rated connection			
1.5...16 / 1.5...16			
1.5...10 / 1.5...10			
18 / 1.0 x 5.5 mm			

Cross-connection of ZDU 10 and ZDU 16 is possible using the ZDV 16-10. Cross-connection of ZDU 10 and ZDU 35 is possible using the ZDV 35-10.


Type	Qty.	Order No.
ZDU 10/3AN	20	1767690000
ZDU 10/3AN BL	20	1767700000

Type	Qty.	Order No.
ZDV 10/2	57 A 25	1739680000
ZAP/TW 10/16	20	1749580000
ZAP/TW 10/16 BL	20	1768520000
ZEW 35	20	9540000000
PS 2.3 RT	20 mA 20	0180400000
SDS 1.0X5.5X150	1	2749380000
ZAD 4/5	20	1746730000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000

ZDU 16

16 mm²

Two connections



12.1 x 82.5 x 50.5
98 / 25
1.5...25



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
1000	600	600	690
76	65	65	68
16	AWG 14...4	AWG 14...4	25 mm ²

8 kV / 3

A7 / V-0

DEMKO15ATEX1467U

Rated connection

1.5...16 / 1.5...25

1.5...16 / 1.5...16

18 / 1.0 x 5.5 mm

Cross-connection of ZDU 16 and ZDU 35 is possible using the ZDV 35-16. Cross-connection of ZDU 10 and ZDU 16 is possible using the ZDV 16-10.


Type	Qty.	Order No.
ZDU 16	25	1745230000
ZDU 16 BL	25	1745240000

Type	Qty.	Order No.
ZQV 16/2	76 A 25	1739690000
ZAP/TW ZDU16	20	1745150000
ZAP/TW ZDU16 BL	20	1764100000
ZEW 35	20	9540000000
PS 2.3 RT	20 mA 20	0180400000
SDS 1.0X5.5X150	1	2749380000
ZAD 5/5	20	1745210000
DEK 5/5 MC NE WS	1000	1609801044
WS 15/5 MC NE WS	480	1609880000


ZDU 16/3 AN

16 mm²

Three connections

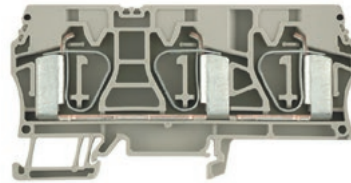

12.1 x 99 x 50.5
76 / 25
1.5...25



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	690
76	65	65	66
16	AWG 14...4	AWG 14...4	25 mm ²

8 kV / 3

A7 / V-0

DEMKO15ATEX1467U

Rated connection

1.5...16 / 1.5...25

1.5...16 / 1.5...16

18 / 1.0 x 5.5 mm


Type	Qty.	Order No.
ZDU 16/3AN	20	1768320000
ZDU 16/3AN BL	20	1768330000

Type	Qty.	Order No.
ZAP/TW 10/16	20	1749580000
ZAP/TW 10/16 BL	20	1768520000
ZEW 35	20	9540000000
PS 2.3 RT	20 mA 20	0180400000
SDS 1.0X5.5X150	1	2749380000
ZAD 5/5	20	1745210000
DEK 5/5 MC NE WS	1000	1609801044
WS 15/5 MC NE WS	480	1609880000

ZEI 16

16 mm²

Supply terminal



14.7 x 82.5 x 50.5
76 / 25
1.5...25



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500	600	600	
76	65	65	
16	AWG 14...4	AWG 14...4	

8 kV / 3

A7 / V-0

Rated connection

1.5...16 / 1.5...25

1.5...16 / 1.5...16

18 / 1.0 x 5.5 mm

Type	Qty.	Order No.
ZEI 16	20	1745350000
ZEI 16 BL	20	1766240000

Integrated end plate.


Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 6/4 GE	41 A 60	1627870000
ZEW 35	20	9540000000
PS 2.3 RT	20 mA 20	0180400000
SDS 1.0X5.5X150	1	2749380000
ZAD 5/5	20	1745210000
DEK 5/5 MC NE WS	1000	1609801044
WS 15/5 MC NE WS	480	1609880000

Spring connection with tension clamp technology (Z-Series) Feed-through terminal blocks

ZDU 35

35 mm²

Two connections

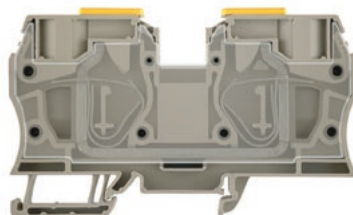

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

16 x 100.5 x 58.5	
125 / 35	
2.5...35	

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

IEC 60947-7-1			
Ex eb II C Gb II 2 G D			
IEC	UL	CSA	EN 60079-7
800	600	600	690
125	120	120	110
35	AWG 12...2	AWG 12...2	35 mm ²
8 kV / 3			
A8 / V-0			
DEMKO15ATEX1467U			
Rated connection			
2.5...16 / 2.5...35			
2.5...35 / 2.5...35			
25 / 1.0 x 5.5 mm			

Note

Cross-connection of ZDU 10 and ZDU 35 is possible using the ZDV 35-10. Cross-connection of ZDU 16 and ZDU 35 is possible using the ZDV 35-16.

Ordering data

Version
dark beige
Blue
Note

Type	Qty.	Order No.
ZDU 35	10	1739620000
ZDU 35 BL	10	1739630000

Accessories

Plug-in cross-connection
2-pole
4-pole
End plate / Partition plate
dark beige
Blue
End bracket
dark beige
Testing / Checking
Test plug
Screwdriver
Standard
Cover
With lightning flash symbol
Marking tags

Type	Qty.	Order No.
ZDV 35/2	125 A 10	1739700000
ZEW 35	20	9540000000
SDS 1.0X5.5X150	1	2749380000
ZAD 6/5	20	1752620000
DEK 5/5 MC NE WS	1000	1609801044
WS 15/5 MC NE WS	480	1609880000

For detailed information on other accessories and application in the online catalogue



Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 2.5-2

2.5 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 50.5 x 43
24 / 2.5
0.13...2.5



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue


ZDU 2.5-2/3AN

2.5 mm²

Three connections



5.1 x 50.5 x 43
24 / 2.5
0.13...2.5



IEC 60947-1			
Ex eb II C Gb Ex II 2 G D			
IEC	UL	CSA	EN 60079-7
800	600	600	550
24	20	23	21
2.5	AWG 26...12	AWG 26...14	4 mm ²
8 kV / 3			
A2 / V-0			
CE CC ENEC KEMA TUV SÜD TUV ÜL DEMKO16ATEX1808U			
Rated connection			
0.5...2.5 / 2.5...0.5			
0.5...2.5 / 0.5...1.5			
10 / 0.6 x 3.5 mm			
Note			

Type	Qty.	Order No.
ZDU 2.5-2/3AN	100	1706010000
ZDU 2.5-2/3AN BL	100	1706040000
Note		

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW7	50	1706110000
ZAP/TW7 BL	50	1706120000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 1/4-2 GE	20	1764560000
DEK 5/5 MC SDR	200	1609810000
DEK 5/5 MM WS	800	2007110000
Note		


ZDU 2.5-2/4AN

2.5 mm²

Four connections



5.1 x 50.5 x 43
24 / 2.5
0.13...2.5



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
24	20	23	21
2.5	AWG 26...12	AWG 26...14	4 mm ²

8 kV / 3

A2 / V-0

DEMKO16ATEX1808U

Rated connection

0.5...2.5 / 2.5...0.5

0.5...2.5 / 0.5...1.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDU 2.5-2/4AN	100	1706060000
ZDU 2.5-2/4AN BL	100	1706070000

Type	Qty.	Order No.
ZQB 2.5-2	24 A 50	1677120000
ZAP/TW7	50	1706110000
ZAP/TW7 BL	50	1706120000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 1/4-2 GE	20	1764560000
DEK 5/5 MC SDR	200	1609810000
DEK 5/5 MM WS	800	2007110000

ZDU 4-2

4 mm²

Two connections



6.1 x 61.5 x 45.5
32 / 6
0.13...6



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	440
32	33	35	29
4	AWG 26...10	AWG 26...10	6 mm ²

8 kV / 3

A3 / V-0

DEMKO16ATEX1808U

Rated connection

0.5...6

0.5...4 / 0.5...4

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDU 4-2/2AN	50	1770370000
ZDU 4-2/2AN BL	50	1770840000

Type	Qty.	Order No.
ZQV 4/2 GE	32 A 60	1608950000
ZQV 4/10 GE	32 A 20	1609030000
ZAP ZDU4-2	50	1770400000
ZAP ZDU4-2 BL	50	1770880000
ZEW 35	20	9540000000
ZTA 6/ZA	17.5 A 25	1780660000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZAD 1/4	20	1609110000
WS 12/6 MC NE WS	600	1609900000
DEK 5/6 MM WS	600	2007120000
DEK 5/6 MC NE WS	1000	1609820000

ZDU 4-2/3AN

4 mm²

Three connections



6.1 x 61.5 x 45.5
38 / 6
0.13...6



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	440
32	33	35	29
4	AWG 26...10	AWG 26...10	6 mm ²

8 kV / 3

A3 / V-0

DEMKO16ATEX1808U

Rated connection

0.5...6

0.5...4 / 0.5...4

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDU 4-2/3AN	50	1770360000
ZDU 4-2/3AN BL	50	1770860000

Type	Qty.	Order No.
ZQV 4/2 GE	32 A 60	1608950000
ZQV 4/10 GE	32 A 20	1609030000
ZAP ZDU4-2	50	1770400000
ZAP ZDU4-2 BL	50	1770880000
ZEW 35	20	9540000000
ZTA 6/ZA	17.5 A 25	1780660000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZAD 1/4	20	1609110000
WS 12/6 MC NE WS	600	1609900000
DEK 5/6 MM WS	600	2007120000

Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 4-2/3AN LSC

4 mm²

Three connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

6.1 x 61.5 x 45.5

38 / 6

0.13...6



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories

Plug-in cross-connection	
	2-pole
	4-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	With spigot
Screwdriver	
	Standard
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZDU 4-2/4AN

4 mm²

Four connections



6.1 x 75.1 x 45.5

32 / 6

0.13...6



IEC 60947-7-1			
Ex eb II C Gb II 2 G D			
IEC	UL	CSA	EN 60079-7
800	600	600	440
32	33	35	29
4	AWG 26...10	AWG 26...10	6 mm ²
8 kV / 3			
A3 / V-0			
DEMKO16ATEX1808U			
Rated connection			
0.5...6			
0.5...4 / 0.5...4			
10 / 0.6 x 3.5 mm			
Note			

Type	Qty.	Order No.
ZDU 4-2/4AN	50	1806980000
ZDU 4-2/4AN BL	50	1806990000

Type	Qty.	Order No.
ZQV 4/2 GE	32 A 60	1608950000
ZQV 4/10 GE	32 A 20	1609030000
ZAP ZDU4-2	50	1770400000
ZAP ZDU4-2 BL	50	1770880000
ZEW 35	20	9540000000
ZTA 6/ZA	17.5 A 25	1780660000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZAD 1/4	20	1609110000
DEK 5/6 MC NE WS	1000	1609820000
WS 12/6 MC NE WS	600	1609900000
DEK 5/6 MM WS	600	2007120000

ZDU 6-2/2AN

6 mm²

Two connections



8.1 x 68 x 49.5
41 / 10
0.22...10



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
41	45	50	38
6	AWG 22...8	AWG 20...8	10 mm ²

8 kV / 3

A5 / V-0



DEMKD16ATEX1808U

Rated connection

0.5...10

0.5...10 / 0.5...6

12 / 0.6 x 3.5 mm, 0.8 x 4.0 mm


ZDU 6-2/3AN

6 mm²

Three connections



8.1 x 68 x 49.5
41 / 10
0.22...10



IEC 60947-7-1 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
800	600	600	550
41	45	50	38
6	AWG 22...8	AWG 20...8	10 mm ²

8 kV / 3

A5 / V-0



DEMKD16ATEX1808U

Rated connection

0.5...10

0.5...10 / 0.5...6

12 / 0.6 x 3.5 mm, 0.8 x 4.0 mm

ZEI 16-2/1AN

16 mm²

Supply terminal



14 x 61.5 x 50.5
76 / 25
1.5...25



In accordance with IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	600	600	
76	65	65	
16	AWG 14...4	AWG 14...4	

6 kV / 3

A7 / V-0



Rated connection

1.5...10 / 16...25

1.5...16 / 1.5...16

18 / 1.0 x 5.5 mm

Type	Qty.	Order No.
ZDU 6-2/2AN	50	1771380000
ZDU 6-2/2AN BL	50	1771390000

Type	Qty.	Order No.
ZDU 6-2/3AN	50	1771410000
ZDU 6-2/3AN BL	50	1771420000

Type	Qty.	Order No.
ZEI 16-2/1AN	20	1772940000
ZEI 16-2/1AN BL	20	1772950000

Type	Qty.	Order No.
ZQV 6/2 GE	41 A 60	1627850000
ZQV 6/4 GE	41 A 60	1627870000
ZAP ZDU6-2	50	1771440000
ZEW 35	20	9540000000
ZTA 7/ZA	9 A 25	1780670000
SDIS SLIM 0.8X4.0X100	1	2749620000
ZAD 2/4	20	1609080000
DEK 5/8 MC NE WS	800	1856740000
DEK 5/8 MM WS	500	2007130000
WS 8/8 MM WS	500	2007170000

Type	Qty.	Order No.
ZQV 6/2 GE	41 A 60	1627850000
ZQV 6/4 GE	41 A 60	1627870000
ZAP ZDU6-2	50	1771440000
ZEW 35	20	9540000000
ZTA 7/ZA	9 A 25	1780670000
SDIS SLIM 0.8X4.0X100	1	2749620000
ZAD 2/4	20	1609080000
DEK 5/8 MC NE WS	800	1856740000
DEK 5/8 MM WS	500	2007130000
WS 8/8 MM WS	500	2007170000

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZAP/Z...16-2/1AN	10	1772970000
ZEW 35	20	9540000000
SDS 1.0X5.5X150	1	2749380000
DEK 5/8 MC NE WS	800	1856740000
DEK 5/8 MM WS	500	2007130000


Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDU 2.5N

2.5 mm²

Two connections




Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 50.5 x 38.5

24 / 4

0.05...4


 Ex eb II
 C Gb II 2 G D

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	300	300	550
24	20	24	20.5
2.5	AWG 30...12	AWG 30...12	2.5 mm ²

6 kV / 3

A2 / V-0

UNDEFINED TEXT

Rated connection

0.5...4 / 1.5...2.5

0.5...2.5 / 0.5...1.5

10 / 0.6 x 3.5 mm

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZDU 2.5N/3AN

2.5 mm²

Three connections



5.1 x 56.5 x 38.5

24 / 4

0.05...4


 Ex eb II
 C Gb II 2 G D

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
800	300	300	550
24	20	24	21.5
2.5	AWG 30...12	AWG 30...12	2.5 mm ²

6 kV / 3

A2 / V-0

UNDEFINED TEXT

Rated connection

0.5...4 / 1.5...2.5

0.5...2.5 / 0.5...1.5

10 / 0.6 x 3.5 mm


Type	Qty.	Order No.
ZDU 2.5N/3AN	50	1933720000
ZDU 2.5N/3AN BL	50	1933730000

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZDU/ZPE 2.5N	20	1933790000
ZAP/TW ZDU/ZPE 2.5N/3AN	50	1933800000
ZEW 35	20	9540000000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 9/4	20	1934160000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 M MC NE WS	720	1792000000
WS 8/5 MM WS	800	2007150000

ZDU 2.5N/4AN

2.5 mm²


Four connections



5.1 x 60 x 38.5

24 / 4

0.05...4



IEC 60947-7-1 Ex eb II C Gb  II 2 G D

IEC	UL	CSA	EN 60079-7
800	300	300	550
24	20	24	21
2.5	AWG 30...12	AWG 30...12	2.5 mm ²

6 kV / 3

A2 / V-0

UNDEFINED TEXT

Rated connection

0.5...4 / 1.5...2.5

0.5...2.5 / 0.5...1.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDU 2.5N/4AN	50	1933740000
ZDU 2.5N/4AN BL	50	1933750000

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZDU/ZPE 2.5N/4AN	50	1933810000
ZEW 35	20	9540000000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 9/4	20	1934160000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 M MC NE WS	720	1792000000
WS 8/5 MM WS	800	2007150000




Spring connection with tension clamp technology (Z-Series) Feed-through terminal blocks

ZDK 1.5

1.5 mm²

Double-level terminal

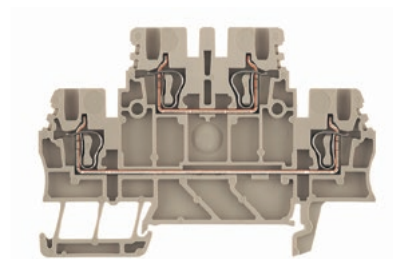

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

3.5 x 75.5 x 49.5	
17.5 / 1.5	
0.05...1.5	

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
dark beige	
Blue	
Note	

Accessories


Plug-in cross-connection	
2-pole	
10-pole	
End plate / Partition plate	
dark beige	
Blue	
End bracket	
dark beige	
Test adapter	
Standard	
With spigot	
Screwdriver	
Standard	
Reducing sleeves	
for conductors < 0.5 mm ² / AWG 20	
for conductors < 1.0 mm ² / AWG 18	
Marking tags	
Cover	
With lightning flash symbol	

For detailed information on other accessories and application in the online catalogue

ZDK 1.5V

1.5 mm²

Vertically cross-connected double-level terminal

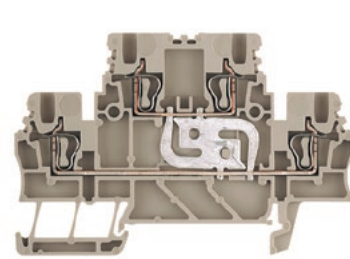

3.5 x 75.5 x 49.5	
17.5 / 1.5	
0.05...1.5	

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500	300	600	
17.5	10	10	
1.5	AWG 28...16	AWG 28...16	
6 kV / 3			
B1 / V-0			
Rated connection			
0.5...1.5			
0.5...1.5 / 0.5...1.5			
10 / 0.4 x 2.0 mm			


Type	Qty.	Order No.
ZDK 1.5V	100	1791130000
ZDK 1.5V BL	50	1791140000

Type		Qty.	Order No.
ZQV 1.5/2	17.5 A	60	1776120000
ZQV 1.5/10	17.5 A	20	1776200000
ZAP/TW ZDK1.5		20	1791160000
ZAP/TW ZDK1.5 BL		20	1791170000
ZEW 35		20	9540000000
SDS 0.4X2.0X60		1	2749260000
ZRH 1.5S/1		500	1781950000
DEK 5/3.5 MC NE WS		500	1755270000
DEK 5/3.5 MM WS		1000	2007100000
ZAD 7/4		20	1781940000


For detailed information on other accessories and application in the online catalogue

ZDK 1.5 DU-PE 1.5 mm²

Double-level terminal (DU-PE)

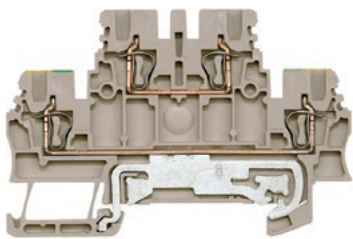

3.5 x 75.5 x 49.5
17.5 / 1.5
0.05...1.5



IEC 60947-7-1 (-7-2)

IEC	UL	CSA	EN 60079-7
500	300		
17.5	10		
1.5	AWG 28...16	AWG 28...16	
6 kV / 3			
B1 / V-0			

CE RoHS REACH

Rated connection
0.5...1.5
0.5...1.5 / 0.5...1.5
10 / 0.4 x 2.0 mm

Type	Qty.	Order No.
ZDK 1.5DU-PE	100	1791120000

Type	Qty.	Order No.
ZQV 1.5/2	17.5 A 60	1776120000
ZQV 1.5/10	17.5 A 20	1776200000
ZAP/TW ZDK1.5	20	1791160000
ZAP/TW ZDK1.5 BL	20	1791170000
ZEW 35	20	9540000000
SDS 0.4X2.0X60	1	2749260000
ZRH 1.5S/1	500	1781950000
DEK 5/3.5 MC NE WS	500	1755270000
DEK 5/3.5 MM WS	1000	2007100000
ZAD 7/4	20	1781940000




Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDK 2.5


2.5 mm²

Double-level terminal

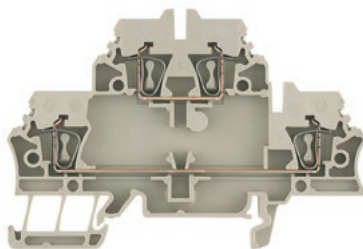

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 79.5 x 53
20 / 2.5
0.05...2.5



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Marking tags	
Cover	
	With lightning flash symbol

For detailed information on other accessories and application in the online catalogue


ZDK 2.5 V

2.5 mm²

Vertically cross-connected double-level terminal

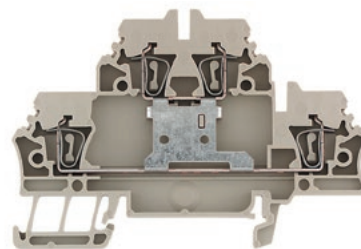

5.1 x 79.5 x 53
20 / 2.5
0.05...2.5



IEC 60947-7-1		Ex eb II C Gb	 II 2 G D
IEC	UL	CSA	EN 60079-7
500	300		440
20	15		20
2.5	AWG 26...14		2.5 mm²
6 kV / 3			
A2 / V-0			
		DEMKO16ATEX1729U	
Rated connection			
0.5...2.5			
0.5...2.5 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

Type	Qty.	Order No.
ZDK 2.5V	50	1689990000
ZDK 2.5V BL	50	1745880000


Type	Qty.	Order No.
ZDV 2.5/2	24 A	60
ZDV 2.5/10	24 A	20
ZAP/TW ZDK2.5	20	1674730000
ZAP/TW ZDK2.5 BL	20	1748800000
ZEW 35	20	9540000000
ZTA ZDK 2.5	6 A	5
ZTA ZDK 2.5/ZA	6 A	5
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000

ZDV 2.5/1.5 (1720700000) connects the upper and lower layer.


ZDK 2.5 DU-PE

2.5 mm²

Phase - PE conductor

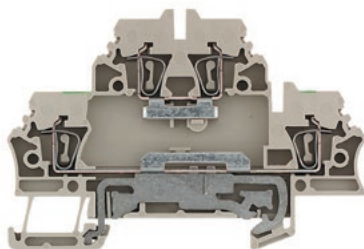

5.1 x 79.5 x 53
24 / 2.5
0.05...2.5



Ex eb II

C Gb



II 2 G D

IEC 60947-7-1 (-7-2)

IEC	UL	CSA	EN 60079-7
500	300		352
20	15		20
2.5	AWG 26...14		2.5 mm ²

6 kV / 3

A2 / V-0



DEMKO16ATEX1729U

Rated connection

0.5...2.5


0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm


ZDK 2.5 N-DU

2.5 mm²

Neutral conductor - phase

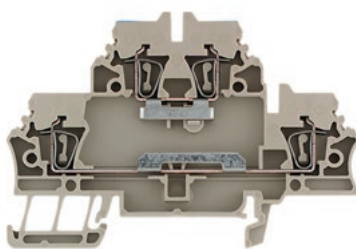

5.1 x 79.5 x 53
23 / 2.5
0.05...2.5



Ex eb II

C Gb



II 2 G D

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500	300		352
20	15		19
2.5	AWG 26...14		2.5 mm ²

6 kV / 3

A2 / V-0



DEMKO16ATEX1729U

Rated connection

0.5...2.5


0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm


ZDK 2.5 N-PE

2.5 mm²

Neutral & PE conductor

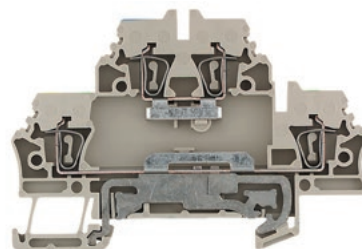

5.1 x 79.5 x 53
24 / 2.5
0.05...2.5



Ex eb II

C Gb



II 2 G D

IEC 60947-7-1 (-7-2)

IEC	UL	CSA	EN 60079-7
500	300		352
20	15		20
2.5	AWG 26...14		2.5 mm ²

6 kV / 3

A2 / V-0



DEMKO16ATEX1729U

Rated connection

0.5...2.5

0.5...2.5 / 0.5...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZDK 2.5DU-PE	50	1689970000

Type	Qty.	Order No.
ZDK 2.5N-DU	50	1689960000

Type	Qty.	Order No.
ZDK 2.5N-PE	50	1689980000

Type		Qty.	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/10	24 A	20	1608940000
ZAP/TW ZDK2.5		20	1674730000
ZAP/TW ZDK2.5 BL		20	1748800000
ZEW 35		20	9540000000
ZTA ZDK 2.5	6 A	5	1052660000
ZTA ZDK 2.5/ZA	6 A	5	1052680000
SDIS SLIM 0.6X3.5X100		1	2749610000
ZRH 1.5H/1		1000	1678810000
ZRH 1.5H/2		1000	1678800000
DEK 5/5 MC NE WS		1000	1609801044
WS 12/5 MC NE WS		720	1609860000
DEK 5/5 MM WS		800	2007110000
WS 8/5 MM WS		800	2007150000

Type		Qty.	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/10	24 A	20	1608940000
ZAP/TW ZDK2.5		20	1674730000
ZAP/TW ZDK2.5 BL		20	1748800000
ZEW 35		20	9540000000
ZTA ZDK 2.5	6 A	5	1052660000
ZTA ZDK 2.5/ZA	6 A	5	1052680000
SDIS SLIM 0.6X3.5X100		1	2749610000
ZRH 1.5H/1		1000	1678810000
ZRH 1.5H/2		1000	1678800000
DEK 5/5 MC NE WS		1000	1609801044
WS 12/5 MC NE WS		720	1609860000
DEK 5/5 MM WS		800	2007110000
WS 8/5 MM WS		800	2007150000

Type		Qty.	Order No.
ZQV 2.5/2	24 A	60	1608860000
ZQV 2.5/10	24 A	20	1608940000
ZAP/TW ZDK2.5		20	1674730000
ZAP/TW ZDK2.5 BL		20	1748800000
ZEW 35		20	9540000000
ZTA ZDK 2.5	6 A	5	1052660000
ZTA ZDK 2.5/ZA	6 A	5	1052680000
SDIS SLIM 0.6X3.5X100		1	2749610000
ZRH 1.5H/1		1000	1678810000
ZRH 1.5H/2		1000	1678800000
DEK 5/5 MC NE WS		1000	1609801044
WS 12/5 MC NE WS		720	1609860000
DEK 5/5 MM WS		800	2007110000
WS 8/5 MM WS		800	2007150000

ZQV 2.5/1.5 (1720700000) connects the upper and lower layer.



Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZOLD 2.5-2 N


2.5 mm²

Three levels



Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 110.5 x 69
20 / 2.5
0.08...2.5



Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

Ordering data

Version	
	dark beige
	Blue
Note	

Accessories


Vertical jumpers	
	1-pole
Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
	Blue
End bracket	
	dark beige
Test adapter	
	With spigot
Screwdriver	
	Standard
	With "swifty set" cutting device
Reducing sleeves	
	for conductors < 1.0 mm ² / AWG 18
	for conductors < 0.5 mm ² / AWG 20
Marking tags	

For detailed information on other accessories and application in the online catalogue


ZOLD 2.5-2 VN

2.5 mm²

Vertically cross-connected multi-level terminal

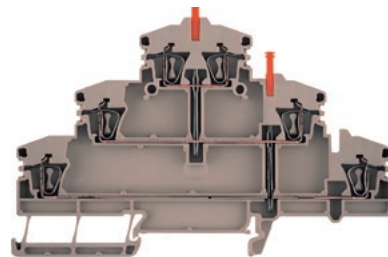

5.1 x 110.5 x 69
20 / 2.5
0.08...2.5



IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
400	300	300	
20	15	15	
2.5	AWG 26...12	AWG 26...12	
6 kV / 3			
A2 / V-0			
CE			
Rated connection			
0.5...2.5			
0.5...2.5 / 0.5...1.5			
10 / 0.6 x 3.5 mm			
Note			

IEC 60947-7-1

IEC	UL	CSA	EN 60079-7
500	300	300	
20	15	15	
2.5	AWG 26...12	AWG 26...12	
6 kV / 3			
A2 / V-0			
CE			
Rated connection			
0.5...2.5			
0.5...2.5 / 0.5...1.5			
10 / 0.6 x 3.5 mm			
Note			

Type	Qty.	Order No.
ZOLD 2.5-2N	50	1782300000
ZOLD 2.5-2N BL	50	1782310000
Note		


Type	Qty.	Order No.
ZVQ 2.5/1.5	24 A 50	1720700000
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZOLD2.5-2N	20	1782340000
ZAP/TW ZOLD2.5-2N BL	20	1782350000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
SWIFTY SET	1	9006060000
ZRH 1.5H/2	1000	1678800000
ZRH 1.5H/1	1000	1678810000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000

ZVQ 2.5/1.5 (1720700000) connects the upper and lower layer.


Type	Qty.	Order No.
ZOLD 2.5-2VN	25	1782320000
ZOLD 2.5-2VN BL	25	1782330000
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZOLD2.5-2N	20	1782340000
ZAP/TW ZOLD2.5-2N BL	20	1782350000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
SWIFTY SET	1	9006060000
ZRH 1.5H/2	1000	1678800000
ZRH 1.5H/1	1000	1678810000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000

ZOLD 2.5-2 N PE/L/L

2.5 mm²

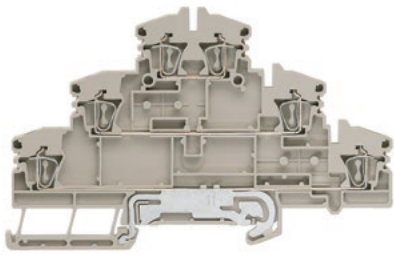

5.1 x 110.5 x 69
20 / 2.5
0.08...2.5



IEC	UL	CSA	EN 60079-7
500	150	150	
20	15	15	
2.5	AWG 26...12	AWG 26...12	
6 kV / 3			
A2 / V-0			



Rated connection


0.5...2.5
0.5...2.5 / 0.5...1.5
10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZOLD 2.5-2N/PE/L/L	50	1131750000


Type	Qty.	Order No.
ZVQ 2.5/1.5	24 A 50	1720700000
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZOLD2.5-2N	20	1782340000
ZAP/TW ZOLD2.5-2N BL	20	1782350000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
SWIFTY SET	1	9006060000
ZRH 1.5H/2	1000	1678800000
ZRH 1.5H/1	1000	1678810000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000

ZOLD 2.5-2 N PE/L/N

2.5 mm²

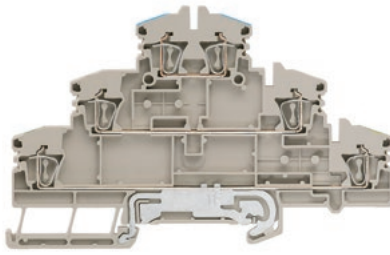

5.1 x 110.5 x 69
20 / 2.5
0.08...2.5



IEC	UL	CSA	EN 60079-7
500	150	150	
20	15	15	
2.5	AWG 26...12	AWG 26...12	
6 kV / 3			
A2 / V-0			



Rated connection


0.5...2.5
0.5...2.5 / 0.5...1.5
10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZOLD 2.5-2N/PE/L/N	50	1131760000


Type	Qty.	Order No.
ZVQ 2.5/1.5	24 A 50	1720700000
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZOLD2.5-2N	20	1782340000
ZAP/TW ZOLD2.5-2N BL	20	1782350000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
SWIFTY SET	1	9006060000
ZRH 1.5H/2	1000	1678800000
ZRH 1.5H/1	1000	1678810000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000

ZOLD 2.5-2 N PE

2.5 mm²

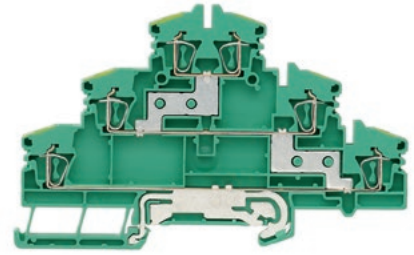

5.1 x 110.5 x 69
/ 2.5
0.08...2.5



IEC	UL	CSA	EN 60079-7
500			
2.5	AWG 26...12	AWG 26...12	
/ 3			
/ V-0			



Rated connection

0.5...2.5 / 0.5...2.5
0.5...2.5 / 0.5...2.5
10 /

Type	Qty.	Order No.
ZOLD 2.5-2N PE	50	1131740000

Type	Qty.	Order No.
ZVQ 2.5/1.5	24 A 50	1720700000
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZOLD2.5-2N	20	1782340000
ZAP/TW ZOLD2.5-2N BL	20	1782350000
ZEW 35	20	9540000000
ZTA 4	11 A 25	1688110000
SDIS SLIM 0.6X3.5X100	1	2749610000
SWIFTY SET	1	9006060000
ZRH 1.5H/2	1000	1678800000
ZRH 1.5H/1	1000	1678810000
DEK 5/5 MC NE WS	1000	1609801044
WS 12/5 MC NE WS	720	1609860000
DEK 5/5 MM WS	800	2007110000
WS 8/5 MM WS	800	2007150000