


ZTPE 2.5/2AN/1

2.5 mm²

ZTPE 2.5/3AN/1

2.5 mm²



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm ²
Max. clamping range	mm ²

5.1 x 58 x 34.5	
/ 4	
0.13...4	

5.1 x 71.5 x 34.5	
/ 4	
0.13...4	

Technical data

Rated data	
Rated voltage	V
Max. voltage of clamp support & pluggable system	V
Rated short-time current	
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500		300	
690			
300 (2.5 mm ²)			
2.5	AWG 26...12		
	/ 3		
	A2 / V-0		
    			
Rated connection		Plug-in connection	
0.5...4			
0.5...4 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500		300	
690			
300 (2.5 mm ²)			
2.5	AWG 26...12		
	/ 3		
	A2 / V-0		
    			
Rated connection		Plug-in connection	
0.5...4			
0.5...4 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

Note

Ordering data

Version	
Green/yellow	
Note	

Type	Qty.	Order No.
ZTPE 2.5/2AN/1	50	1815080000
Note		

Type	Qty.	Order No.
ZTPE 2.5/3AN/1	50	1815100000
Note		

Accessories

End plate / Partition plate	
dark beige	
Orange	
Test adapter	
Standard	
With spigot	
Miscellaneous accessories WeiCoS	
Locking element	
Coding element	
Strain relief	
Screwdriver	
Standard	
Marking tags	

Type	Qty.	Order No.
ZAP/TW ZT2.5/2AN	50	1816030000
ZAP/TW ZT2.5/2AN OR	50	1816040000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
ZVR ZP2.5	25	1816130000
KOSF ZT2.5	50	1816150000
ZZE ZP2.5	25	1816140000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000


Type	Qty.	Order No.
ZAP/TW ZT2.5/3AN	50	1816050000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
ZVR ZP2.5	25	1816130000
KOSF ZT2.5	50	1816150000
ZZE ZP2.5	25	1816140000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue

Spring connection with tension clamp technology (Z-Series)

Pluggable terminal blocks

ZTPE 2.5/4AN/2

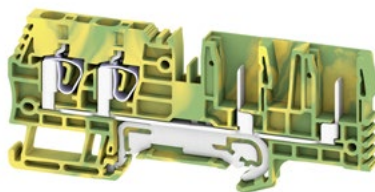
2.5 mm²

ZTPE 2.5/4AN/4

2.5 mm²

Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm ²
Max. clamping range	mm ²

5.1 x 93 x 34.5
/ 4
0.13...4



5.1 x 85.5 x 34.5
/ 4
0.13...4



Technical data

Rated data	
Rated voltage	V
Max. voltage of clamp support & pluggable system	V
Rated short-time current	
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note

In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500		300	
690			
300 (2.5 mm ²)			
2.5	AWG 26...12		
	/ 3		
	A2 / V-0		
Rated connection		Plug-in connection	
0.5...4			
0.5...4 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

In accordance with IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
500		300	
690			
300 (2.5 mm ²)			
2.5	AWG 26...12		
	/ 3		
	A2 / V-0		
Rated connection		Plug-in connection	
0.5...4			
0.5...4 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

Ordering data

Version
Green/yellow
Note

Type	Qty.	Order No.
ZTPE 2.5/4AN/2	50	1815120000

Type	Qty.	Order No.
ZTPE 2.5/4AN/4	50	1815140000

Accessories

End plate / Partition plate	
	dark beige
	Orange
Test adapter	
	Standard
	With spigot
Miscellaneous accessories WeiCoS	
	Locking element
	Coding element
	Strain relief
Screwdriver	
	Standard
Marking tags	

Type	Qty.	Order No.
ZAP/TW ZT2.5/4AN/2	50	1816070000
ZAP/TW ZT2.5/4AN/2 OR	50	1816080000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
ZVR ZP2.5	25	1816130000
KOSF ZT2.5	50	1816150000
ZZE ZP2.5	25	1816140000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

Type	Qty.	Order No.
ZAP/TW ZT2.5/4AN/4	50	1816090000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
ZVR ZP2.5	25	1816130000
KOSF ZT2.5	50	1816150000
ZZE ZP2.5	25	1816140000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue