


Spring connection with tension clamp technology (Z-Series)

Feed-through terminal blocks

ZDK 2.5/3AN

2.5 mm²


Double-level terminal

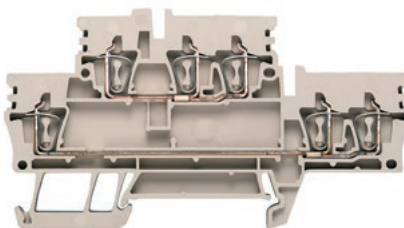

ZDK 2.5/3AN V

2.5 mm²

Vertical cross-connected double-level terminal

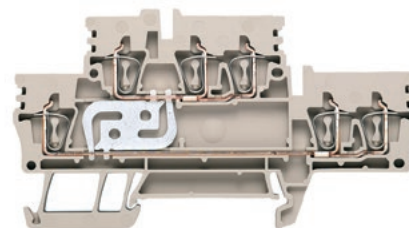

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

5.1 x 93 x 50.5	
24 / 4	
0.05...4	

5.1 x 93 x 50.5	
24 / 4	
0.05...4	

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-
Note	

IEC 60947-7-1			
Ex eb II C Gb II 2 G D			
IEC	UL	CSA	EN 60079-7
800	300	300	440
24	20	24	21
2.5	AWG 30...12	AWG 30...12	2.5 mm ²
8 kV / 3			
A2 / V-0			
DEMKO16ATEX1729U			
Rated connection			
0.5...4 / 0.5...2.5			
0.5...2.5 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

IEC 60947-7-1			
Ex eb II C Gb II 2 G D			
IEC	UL	CSA	EN 60079-7
800	300	300	440
24	20	24	20
2.5	AWG 30...12	AWG 30...12	2.5 mm ²
8 kV / 3			
A2 / V-0			
DEMKO16ATEX1729U			
Rated connection			
0.5...4 / 0.5...2.5			
0.5...2.5 / 0.5...2.5			
10 / 0.6 x 3.5 mm			

Ordering data

Version	
	dark beige
	Blue
Note	

Type	Qty.	Order No.
ZDK 2.5/3AN	50	1924510000
ZDK 2.5/3AN BL	50	1924500000

Type	Qty.	Order No.
ZDK 2.5/3AN V	50	1924490000
ZDK 2.5/3AN V BL	50	1924480000

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZDK 2.5/3AN	20	1924910000
ZEW 35	20	9540000000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 9/4	20	1934160000
SNAPMARK I	50	1805880000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000


Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZDK 2.5/3AN	20	1924910000
ZEW 35	20	9540000000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 9/4	20	1934160000
SNAPMARK I	50	1805880000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue

ZDK 2.5/3AN DU-PE

2.5 mm²

Double-level terminal (DU-PE)

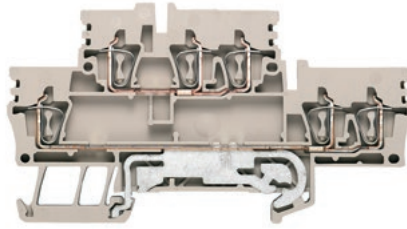

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

Technical data

Rated data	
Rated voltage	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length / Blade size	mm/-

Note


Ordering data

Version	Green/yellow
Note	

Accessories

Plug-in cross-connection	
	2-pole
	10-pole
End plate / Partition plate	
	dark beige
End bracket	
	dark beige
Test adapter	
	Standard
	With spigot
Screwdriver	
	Standard
Reducing sleeves	
	for conductors < 0.5 mm ² / AWG 20
	for conductors < 1.0 mm ² / AWG 18
Cover	
	With lightning flash symbol
Marking tags	

5.1 x 93 x 50.5	
31 / 4	
0.05...4	



Ex eb II
C Gb II 2 G D

IEC 60947-7-1 (-7-2)			
IEC	UL	CSA	EN 60079-7
800	300	300	440
24	20	24	21
2.5	AWG 30...12	AWG 30...12	2.5 mm ²
8 kV / 3			
A2 / V-0			

	DEMKO16ATEX1729U
Rated connection	
0.5...4 / 0.5...2.5	
0.5...2.5 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

Type	Qty.	Order No.
ZDK 2.5/3AN DU-PE	50	1924460000

Type	Qty.	Order No.
ZQV 2.5/2	24 A 60	1608860000
ZQV 2.5/10	24 A 20	1608940000
ZAP/TW ZDK 2.5/3AN	20	1924910000
ZEW 35	20	9540000000
ZTA ZT2.5	17.5 A 25	1827080000
ZTA ZT2.5/ZA	17.5 A 25	1847600000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 1.5H/1	1000	1678810000
ZRH 1.5H/2	1000	1678800000
ZAD 9/4	20	1934160000
SNAPMARK I	50	1805880000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue



Spring connection with tension clamp technology (Z-Series)

PE terminal blocks

ZPEA 2.5-2

2.5 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm ²
Max. clamping range	mm ²

5.1 x 35 x 30	
/ 4	
0.13...4	

Technical data

Rated data	
for wire cross-section	mm ²
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	-
Stripping length / Blade size	mm/-

Note

Ordering data

Version	Green/yellow
Note	

Accessories

End plate / Partition plate	dark beige
End bracket	dark beige beige
Screwdriver	Standard
Reducing sleeves	for conductors < 0.5 mm ² / AWG 20
Marking tags	

For detailed information on other accessories and application in the online catalogue

ZPEA 2.5-2N

2.5 mm²

Two connections



5.1 x 42.5 x 35	
/ 4	
0.13...4	

IEC 60947-7-2

IEC	UL	CSA	EN 60079-7
2.5	AWG 26...12	AWG 26...12	4 mm ²
800			
8			
	300 A (2.5 mm ²)		
	3		
	A2 / V-0		

TS 15 - sliced construction

Type	Qty.	Order No.
ZPEA 2.5-2N	50	1808210000

Type	Qty.	Order No.
ZAP/TW ZDUA2.5-2N	50	1808170000
ZEW 15	20	7920340000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue


ZPEB 2.5-2

2.5 mm²

Two connections



5.1 x 33.5 x 31
/ 4
0.13...4



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
2.5	AWG 26...12	AWG 26...12	4 mm ²
800			
8			
	300 A (2.5 mm ²)		
	3		
	A2 / V-0		

Rated connection

0.5...4
0.5...2.5 / 0.5...1.5

10 / 0.6 x 3.5 mm

TS 15 - block construction


Type	Qty.	Order No.
ZPEB 2.5-2	100	1712810000

Type	Qty.	Order No.
ZAP ZDUB	50	1704750000
ZEW 15	20	7920340000
SDIS SLIM 0.6X3.5X100	1	2749610000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

ZPE 1.5

1.5 mm²

Two connections



3.5 x 54.5 x 36.5
/ 1.5
0.05...1.5



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
1.5	AWG 26...14	AWG 26...14	1.5 mm ²
500			
6			
	180 A (1.5 mm ²)		
	3		
	B1 / V-0		

Rated connection

0.5...1.5
0.5...1.5 / 0.5...1.5
0.5...0.75

10 / 0.4 x 2.0 mm


Type	Qty.	Order No.
ZPE 1.5	50	1775510000

Type	Qty.	Order No.
ZAP/TW ZDU1.5/2AN	20	1776030000
ZEW 35	20	9540000000
SDS 0.4X2.0X60	1	2749260000
ZRH 1.5S/1	500	1781950000
DEK 5/3.5 MC NE WS	500	1755270000
WS 12/3.5 MC NE WS	600	1778270000
DEK 5/3.5 MM WS	1000	2007100000


ZPE 1.5/3AN

1.5 mm²

Three connections

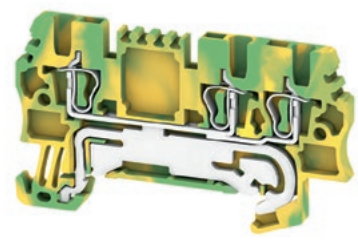

3.5 x 63 x 36.5
/ 1.5
0.05...1.5



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
1.5	AWG 26...14	AWG 26...14	1.5 mm ²
500			
6			
	180 A (1.5 mm ²)		
	3		
	B1 / V-0		

Rated connection

0.5...1.5
0.5...1.5 / 0.5...1.5
0.5...0.75

10 / 0.4 x 2.0 mm

Type	Qty.	Order No.
ZPE 1.5/3AN	50	1775560000

Type	Qty.	Order No.
ZAP/TW ZDU1.5/3AN	20	1776060000
ZEW 35	20	9540000000
SDS 0.4X2.0X60	1	2749260000
ZRH 1.5S/1	500	1781950000
DEK 5/3.5 MC NE WS	500	1755270000
WS 12/3.5 MC NE WS	600	1778270000
DEK 5/3.5 MM WS	1000	2007100000


Spring connection with tension clamp technology (Z-Series)

PE terminal blocks

ZPE 1.5/4AN

1.5 mm²

Four connections

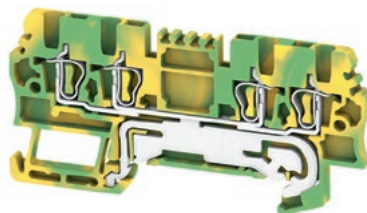

ZPE 2.5

2.5 mm²

Two connections



Width/Height/Depth	mm
max. current / max. cond. cross-section	-/mm ²
Max. clamping range	mm ²

Technical data

Rated data	
for wire cross-section	mm ²
Rated voltage to adjoining terminal	V
Rated impulse withstand voltage to adjacent terminal	kV
Rated short-time current	
Pollution severity	
Gauge to IEC 60947-1 / UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Twin wire-end ferrule	mm ²
Stripping length / Blade size	mm/-

Note

Ordering data

Version	Green/yellow
Note	

Accessories

End plate / Partition plate	dark beige
End bracket	dark beige
Test adapter	Standard With spigot
Screwdriver	Standard
Reducing sleeves	for conductors < 0.5 mm ² / AWG 20 for conductors < 1.0 mm ² / AWG 18
Marking tags	

3.5 x 75.5 x 36.5	
/ 1.5	
0.05...1.5	

IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
1.5	AWG 26...14	AWG 26...12	1.5 mm ²
500			
6			
180 A (1.5 mm ²)			
3			
B1 / V-0			

Rated connection	
0.5...1.5	
0.5...1.5 / 0.5...1.5	
0.5...0.75	
10 / 0.4 x 2.0 mm	

Type	Qty.	Order No.
ZPE 1.5/4AN	50	1775620000

Type	Qty.	Order No.
ZAP/TW ZDU1.5/4AN	20	1776090000
ZEW 35	20	9540000000
SDS 0.4X2.0X60	1	2749260000
ZRH 1.5S/1	500	1781950000
DEK 5/3.5 MC NE WS	500	1755270000
WS 12/3.5 MC NE WS	600	1778270000
DEK 5/3.5 MM WS	1000	2007110000

5.1 x 63 x 38.5	
/ 4	
0.05...4	

IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
2.5	AWG 30...12	AWG 26...12	4 mm ²
800			
8			
300 A (2.5 mm ²)			
3			
A3 / V-0			

Rated connection	
0.5...4	
0.5...4 / 0.5...2.5	
10 / 0.6 x 3.5 mm	

Type	Qty.	Order No.
ZPE 2.5	50	1608640000

Type	Qty.	Order No.
ZAP/TW 1	50	1608740000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/V0	1000	1614290000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

For detailed information on other accessories and application in the online catalogue


ZPE 2.5/3AN

2.5 mm²

Three connections



5.1 x 64.5 x 38.5
/ 4
0.05...4



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
2.5	AWG 30...12	AWG 26...12	4 mm ²
800			
8			
300 A (2.5 mm ²)			
3			
A3 / V-0			

Rated connection

0.5...4
0.5...4 / 0.5...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZPE 2.5/3AN	50	1608650000

Type	Qty.	Order No.
ZAP/TW 2 DB	50	1608770000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/VO	1000	1614290000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

ZPE 2.5/4AN

2.5 mm²

Four connections



5.1 x 79.5 x 38.5
/ 4
0.05...4



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
2.5	AWG 30...12	AWG 26...12	4 mm ²
800			
8			
300 A (2.5 mm ²)			
3			
A3 / V-0			

Rated connection

0.5...4
0.5...4 / 0.5...2.5

10 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZPE 2.5/4AN	50	1608660000

Type	Qty.	Order No.
ZAP/TW 3	50	1608800000
ZEW 35	20	9540000000
ZTA 1	9 A 25	1609040000
ZTA 1/ZA	9 A 25	1609050000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 2.5/1 WS	1000	1614300000
ZRH 2.5/2 GR/VO	1000	1614290000
DEK 5/5 MC NE WS	1000	1609801044
WS 10/5 MC NE WS	720	1635000000
DEK 5/5 MM WS	800	2007110000

ZPE 4

4 mm²

Two connections



6.1 x 62.5 x 43
/ 6
0.13...6



IEC 60947-7-2 Ex eb II C Gb II 2 G D

IEC	UL	CSA	EN 60079-7
4		AWG 26...10	6 mm ²
800			
8			
480 A (4 mm ²)			
3			
A4 / V-0			

Rated connection

0.5...6 / 1.5...6
0.5...6 / 0.5...4

12 / 0.6 x 3.5 mm

Type	Qty.	Order No.
ZPE 4	50	1632080000

Type	Qty.	Order No.
ZAP/TW 4	50	1632090000
ZEW 35	20	9540000000
ZTA 2 ZDU4	9 A 25	1609060000
ZTA 2/ZA ZDU4	9 A 25	1609070000
SDIS SLIM 0.6X3.5X100	1	2749610000
ZRH 4/1 WS	1000	1636640000
DEK 5/6 MC NE WS	1000	1609820000
WS 12/6 MC NE WS	600	1609900000
DEK 5/6 MM WS	600	2007120000