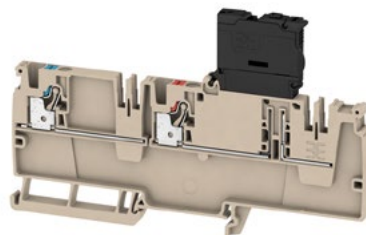


AAP - potential distribution terminal blocks

AAP22 4 LI-FS

4 mm²

Width/Height/Depth	mm
max. current / max. cond. cross-section	A/mm ²
Max. clamping range	mm ²

Technical data

Rated data	
Rated voltage to adjoining terminal	V
Rated current	A
for wire cross-section	mm ²
Rated impulse withstand voltage / Pollution severity	
UL 94 flammability rating	
Approvals	
Clamped conductors (H05V/H07V)	
Solid / Stranded	mm ²
Flexible / Flexible with ferrule	mm ²
Stripping length	
Blade size	

Note

Ordering data

Version	
250 V AC/DC, without LED	
10-36 V AC/DC, with LED	
30-70 V AC/DC, with LED	
60-150 V AC/DC, with LED	
100 - 250 V AC/DC, with LED	
Note	

Accessories

Plug-in cross-connection	
2-pole / blue	
10-pole/ blue	
2-pole/ red	
10-pole / red	
End plate / Partition plate	
End bracket	
dark beige, screwable	
dark beige, direct mounting	
Screwdriver	
Standard	
Marking tags	


G-fuse cartridge, 5 x 20 mm (IEC 60127-2)

0.25 A fast
0.50 A fast
1.00 A fast
2.00 A fast

6.1 x 129 x 82

6.3 / 4

0.14...4



In accordance with IEC 60947-7-1, Ex ec II C Gc II

In accordance with IEC 60947-7-3 2 G D Ex

IEC	UL	CSA	EN 60079-7
500	300 (D)		
6.3	10		6.3
4	AWG 26...10		4 mm ²
4 kV / 3			
V-0			

CE CE RoHS Ex TUEV17ATEX8064U

Rated connection

0.5...4 / 0.5...4
0.5...4 / 0.5...4
12 mm
0.6 x 3.5 mm

Type	Qty.	Order No.
AAP22 4 LI-FS	50	2429010000
AAP22 4 LI-FS 10-36V	50	2459010000
AAP22 4 LI-FS 30-70V	50	2460140000
AAP22 4 LI-FS 60-150V	50	2460130000
AAP22 4 LI-FS 100-250V	50	2460120000

Type	Qty.	Order No.
ZQV 4N/2 BL	32 A 60	1528040000
ZQV 4N/10 BL	32 A 20	1528230000
ZQV 4N/2 RD	32 A 60	2460450000
ZQV 4N/10 RD	32 A 20	2460740000

AEP AP22	20	2429040000
----------	----	------------

AEB 35 SC/1	50	1991920000
AEB 35 SCL/1 V0	20	2661280000

SDIL 0,6X3,5X100	1	2749140000
------------------	---	------------

WS 10/6 M PLUS MC NE WS	600	2003780000
DEK 5/6 MM WS	600	2007120000
WS 8/6 MM WS	600	2007160000
DEK 5/6 PLUS MC NE WS	1000	1011320000

G 20/0.25A/F	0.25 A 10	0430500000
G 20/0.50A/F	0.5 A 10	0430600000
G 20/1.00A/F	1 A 10	0430700000
G 20/2.00A/F	2 A 10	0430900000

For detailed information on other accessories and application in the online catalogue

