


Top of fitting



CR10

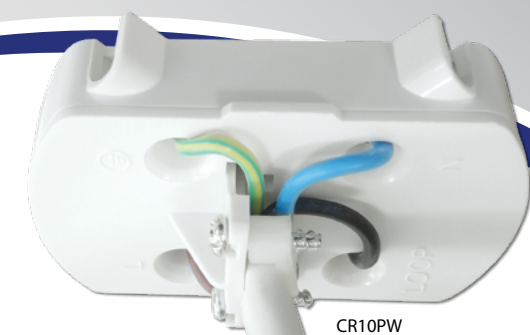


CR10PW



PLUG IN CEILING ROSE

- Urea construction • 6 Amp rating 4 terminal • BESA box mounting
- Shrouded plug terminals and cord grip: complies with 2.2kg load test
- 4 terminals as standard offering extra live connection: ideal for emergency auxiliary use

- CR10PW:**
- Pre-wired with 2 metres of heat resistant 4 core flex: time saving, easy installation



Code	Version	IP Rating	MOM / OPQ
CR10	Un-wired	IP20	10 / 180
CR10PW	Pre-wired		10 / 60