




Eterna
Everyday Lighting For Professionals



2m mains link lead included

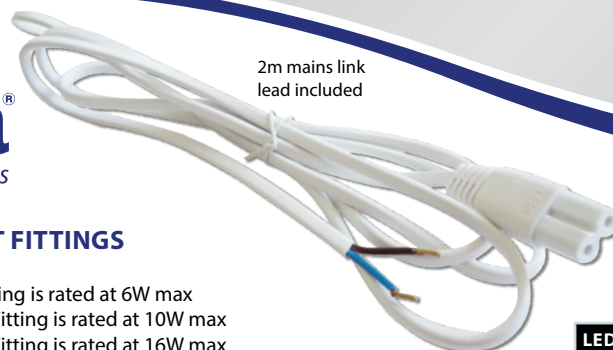

Additional link lead available (NL1WH)

Link&Light


LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

- **TUS6NL** requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- **TUS10NL** requires 1 x 10W G5 T4 341mm fluorescent tube (included). Fitting is rated at 10W max
- **TUS16NL** requires 1 x 16W G5 T4 468mm fluorescent tube (included). Fitting is rated at 16W max
- **TUS20NL** requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- Polycarbonate construction • Individual rocker switch
- Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included • See product codes NL1WH for additional link lead
- 1 year warranty • Double insulated

REPLACEMENT LAMPS (N64 RANGE):



- Glass construction • Not dimmable
- Specifically designed for use with Eterna brand fittings

- **Fittings** = M.O.M: 5 / O.P.Q: 50
- **6W / 10W / 16W Lamps** = M.O.M: 10 / O.P.Q: 200
- **20W Lamps** = M.O.M: 10 / O.P.Q: 100
- **Link Lead** = M.O.M: 5 / O.P.Q: 200

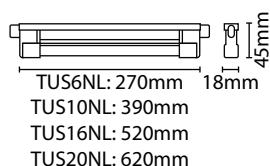

Fixing clips included

Code	Version	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating
TUS6NL	Fitting	White	6W	3400K	328 lm	10,000 hrs	IP20
TUS10NL			10W		563 lm		
TUS16NL			16W		933 lm		
TUS20NL			20W		1136 lm		
N64/1	Replacement Lamp	White	6W	3400K	328 lm	-	-
N64/3			10W		563 lm		
N64/5			16W		933 lm		
N64/7			20W		1136 lm		
NL1WH	White 1m Link Lead						



LED LAMP SPECIFICATIONS:	6W	10W	16W	20W
Luminaire lumens (with diffuser)	328 lm	563 lm	933 lm	1136 lm
Lumens from chip (no diffuser)	340 lm	700 lm	1150 lm	1600 lm
Useful lumens	328 lm	363 lm	933 lm	1136 lm
Rated Wattage	6W	10W	16W	20W
Rated luminous flux	340 lm	700 lm	1150 lm	1600 lm
Nominal life time of the lamp	10,000 hrs	10,000 hrs	10,000 hrs	10,000 hrs
Colour temperature	3400K	3400K	3400K	3400K
Warm-up time up to 60% of the full light output	<3s	<3s	<3s	<3s
Dimmable	No	No	No	No
Nominal beam angle	360°	360°	360°	360°
Rated power	6W	10W	16W	20W
Rated lamp lifetime	10,000 hrs	10,000 hrs	10,000 hrs	10,000 hrs
Displacement factor	>0.847	>0.908	>0.929	>0.861
Lumen maintenance factor at end of nominal life	95	95	95	95
Starting time	<0.3s	<0.3s	<0.3s	<0.3s
Colour rendering	≥80	≥80	≥80	≥80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated beam angle	360°	360°	360°	360°
Voltage / Frequency	240V~50Hz	240V~50Hz	240V~50Hz	240V~50Hz
Lumen efficacy	54 lm / W	56 lm / W	58 lm / W	56 lm / W

This product contains a Light Source of Energy Efficiency Class G

Class 2 double insulated

Not suitable for accent lighting