


## 89DUS99B

### Sheer Floor Sockets | SHEER FLOOR SOCKETS RANGE | Power Sockets


Item Image



Wiring

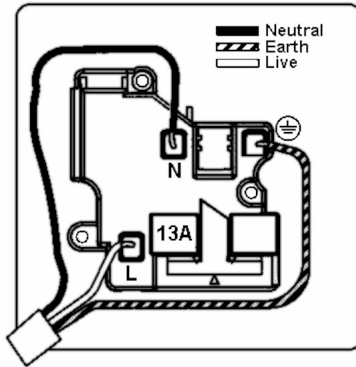



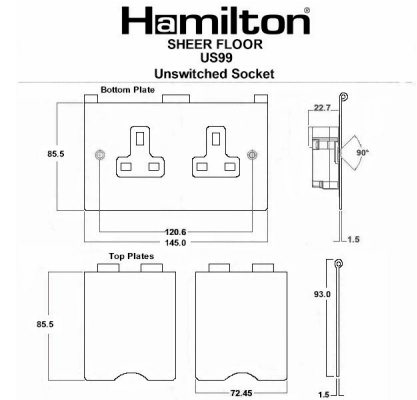



Dimensions



|                               |  |
|-------------------------------|--|
| Primary Range                 | Sheer Floor Sockets  |
| Insert Type                   | 2 gang 13A Unswitched Socket   |
| Insert Colour                 | Black  |
| EAN13 Barcode                 | 5017504035303  |
| Commodity Code                | 85363010   |
| Luckins TSI                   | 398360177  |
| Dimensions(Nominal)           | Double: Height = 93mm Width = 145mm Depth = 3.0mm (6.5mm Hinged Cover) |
| Weight                        | 428 GR   |
| Switched Poles                | None   |
| Current Rating                | 13 Amp   |
| Voltage                       | 220/250V AC  |
| Maximum Load                  | 13 Amp   |
| Mains Frequency               | 50Hz   |
| IP Rating                     | IP2XD  |
| Contact Gap Minimum           | None   |
| Terminal Capacity 1           | 3x2.5mm <sup>2</sup>   |
| Terminal Capacity 2           | 3x4mm <sup>2</sup>   |
| Terminal Capacity 3           | 2x6mm <sup>2</sup> Multi-strand  |
| Terminal Capacity 4           | 1x10mm <sup>2</sup>  |
| Earth Terminal Capacity 1     | 3x2.5mm <sup>2</sup>   |
| Earth Terminal Capacity 2     | 3 x 4mm <sup>2</sup>   |
| Earth Terminal Capacity 3     | 2 x 6mm <sup>2</sup> Multi-strand                                      |
| Earth Terminal Capacity 4     | 1 x 10mm <sup>2</sup>  |
| Product Class 1               | Must be earthed  |
| Ambient Operating Temperature | -5° to +40°C   |
| Recommended Location          | Internal Use Only  |
| Maximum Installation Altitude | 2000m  |
| Standard/Approval             | BS 1363-2  |

## 89DUS99B

### Sheer Floor Sockets | SHEER FLOOR SOCKETS RANGE | Power Sockets

|   |   |  |
|---|---|--|
| Additional Notes  | Shuttered: Yes  |  |
| All products listed conform to current British or European standard and the product information is correct at the time of going to press.   | All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.         | It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.  |
| Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.  | Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. | Correct as at 21 April 2022 02:03 PM E&OE  |
| <p>R Hamilton &amp; Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ<br/> T: +44 (0)1747 860088<br/> E: info@hamilton-litestat.com www.hamilton-litestat.com<br/> Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB<br/> Registered in London No. 941624 VAT Registration No. 222 6607 84</p> |   |       <p>CERT. No. 1981138</p> |
| 89DUS99B-Sheer Floor Sockets   SHEER FLOOR SOCKETS RANGE   Power Sockets  |   |  |