

Domestic applications to BS 1361

Consumer unit fuse links

Specifications

Description

Cylindrical fuse links for domestic applications in compliance with BS 1361 for the protection of domestic distribution systems.

Technical data

Rated voltage: 240 V a.c.
 Rated current: 5 to 45 A
 Breaking capacity: 16.5 kA at 240 V a.c.

Standard/agency information

Approved to BS 1361


Product selection

Class gG, 240 V a.c., 5 to 45 A



Catalogue numbers	Rated voltage	Rated current (Amps)	Breaking capacity	Operating class	Colour	Pack quantity
C55	240 V a.c.	5	16.5 kA at 240 V a.c.	gG	White	10
C1515	240 V a.c.	15	16.5 kA at 240 V a.c.	gG	Blue	10
C1520	240 V a.c.	20	16.5 kA at 240 V a.c.	gG	Yellow	10
C3030	240 V a.c.	30	16.5 kA at 240 V a.c.	gG	Red	10
C4545	240 V a.c.	45	16.5 kA at 240 V a.c.	gG	Green	10
BK-C55	240 V a.c.	5	16.5 kA at 240 V a.c.	gG	White	100
BK-C1515	240 V a.c.	15	16.5 kA at 240 V a.c.	gG	Blue	100
BK-C1520	240 V a.c.	20	16.5 kA at 240 V a.c.	gG	Yellow	100
BK-C3030	240 V a.c.	30	16.5 kA at 240 V a.c.	gG	Red	100
BK-C4545	240 V a.c.	45	16.5 kA at 240 V a.c.	gG	Green	100

Dimensions - mm

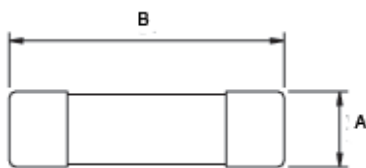

Catalogue numbers	A	B
C55	5.35	23
C1515	10.2	26
C1520	10.32	26
C3030	12.7	29
C4545	16.67	35