

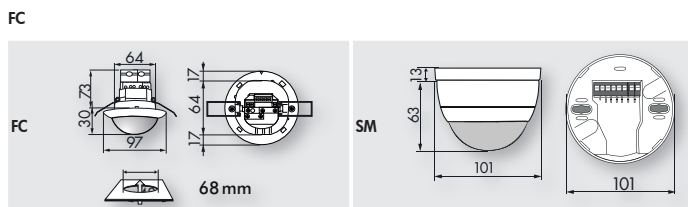


PD4-S-SM/-FC/-FM

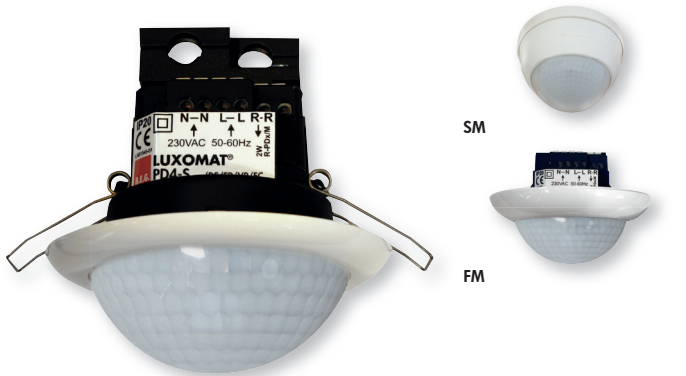


i PRODUCT INFORMATION

- Slave occupancy detector with extended detection area
- For extending the detection area of a Master unit
- Trigger pulse to master when motion is detected is independent of ambient lighting
- Compatible with all Master units except: PD4-M-DS-FC, 11-48V units, PD9-M-SDB

■ TECHNICAL DATA

- 110-240 V AC , 50 / 60 Hz
- ca. 0.2W
- 360°
- Ø 24 m across
Ø 8 m towards
Ø 6.4 m seated
- SM= IP54 FC= IP20 FM= IP20 / Class II
- 25 °C to +50 °C
- Housing UV- and shock resistant polycarbonate
- Pulse interval of 2 s or 9 s
- Slave**
- 230V

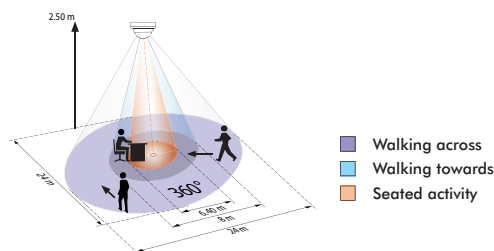

Description	Colour	Part number
PD4-S-FC	white	92254
PD4-S-SM	white	92142
PD4-S-FM	white	92163
Accessory (optional)		
Socket IP54 for PD2- and PD4-SM	white	92161
Wire basket BSK (Ø 200 x 100)	white	92199
Wire basket BSK (Ø 200 x 100)	white	92199