

MIDI PIZZA

LED

CFL





White
AP/W



Titanium
AP/X

Size	AP
A	286mm
B	286mm
C	38mm
D	43mm

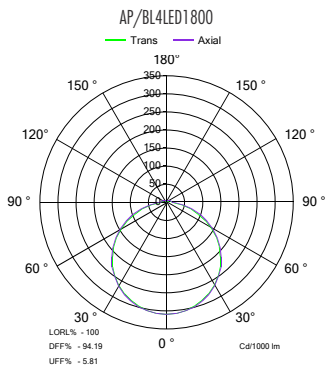

LED / Lamp Types

- 28W / 38W 2D 4-Pin. 3500K. GR10 Cap.
- LED versions.

Material 1 Polycarbonate

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / Titanium.
- Diffuser: Vandal resistant polycarbonate in opal or prismatic, with self-extinguishing fire properties.

Material 2 Die Cast Aluminium

- Body: Die cast aluminium.
- Diffuser: Vandal resistant polycarbonate in opal or prismatic, with self-extinguishing fire properties.

Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry.
- 3 way mains terminal block. 4 way terminal block for emergency & photocell versions.
- Screw down diffuser (with anti tamper screws on request).
- Photocell version - external use only.
- Microwave sensor option (internal use only).
- eMotion™ Master (internal only) and Slave options available.

Standards

- IP65.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

Diffuser Option	Change code
Prismatic (Non LED Only)	AP/_P
Base Option	Add to code
Metal Base	APM/

Self Test Emergency
Prefix APST/ Suffix M

LED	Midi Pizza Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy
LED 1800	AP/BL4LED1800	Black	Premium Opal	IP65	80	4000K	16.7W	1617lm	97lm/W
LED 1800 250mA	AP/BL4LED1800-250	Black	Premium Opal	IP65	80	4000K	10.9W	862.7lm	79lm/W

CFL	Midi Pizza Code	Colour Finish	Diffuser	IP Rating
28W HF	AP/BL328U6	Black	Premium Opal	IP65
38W HF	AP/BL338U6	Black	Premium Opal	IP65

Options

Emergency	e-Motion Corridor	Photocell	Microwave	Dimmable	Self Test	Daylight Monitoring
✓	✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓

Emergency	e-Motion Corridor	Photocell	Microwave	Dimmable	Self Test	Daylight Monitoring
✓	✓	✓	✓	✓	✓	✓
		✓	✓	✓		

Code Options (Add suffix to code)

3 Hour Maintained Emergency
M

Microwave On/Off
-9

DALI / DSI DIM
-DDD

Switch Dim
-DD

Photocell
C

Anti Tamper Screws
T

DAYLIGHT Monitoring
-CFDP

Analogue Dim
-DA