

HALF LANTERN

LED


CFL



White
HL/W



Titanium
HL/X



Size	HL
A	182mm
B	394mm
C	118mm

LED / Lamp Types

- 10W.
- 13W TC-D.
- 18W TC-D.
- 60W B22 (Less lamp) / E27 also available.
- LED 600.

Materials


- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium / other colours on request.
- Windows: Vandal resistant polycarbonate in clear (or premium opal in LED range).

Installation

- Simple installation.
- Photocell option external use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.

Standards

- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

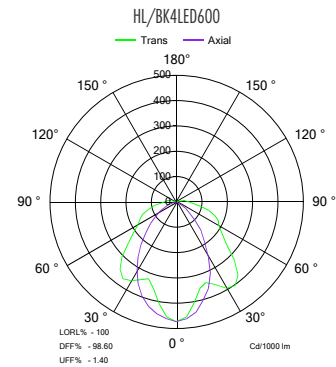

Options

LED	Half Lantern Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy
LED 600	HL/BK4LED600	Black	Premium Opal	IP44	80	4000K	7.4W	283.3lm	38lm/W

Photocell	PIR	HI-LO PIR
✓	✓	✓

CFL	Half Lantern Code	Colour Finish	Diffuser	IP Rating
60W	HL/BK060	Black	Clear	IP44
10W HF	HL/BK110E	Black	Clear	IP44
13W HF	HL/BK113E	Black	Clear	IP44
18W HF	HL/BK118E	Black	Clear	IP44

Photocell	PIR	HI-LO PIR
✓	✓	
✓	✓	
✓	✓	
✓	✓	

Code Options (Add suffix to code)



PIR
P



HI-LO PIR
HILO



Photocell
C