

# CLARITY LANDSCAPE

LED

CFL

EXTERIOR LIGHTING SOLUTIONS




White  
C2L/W



Titanium  
C2L/X



Satin Aluminium  
C2L/F

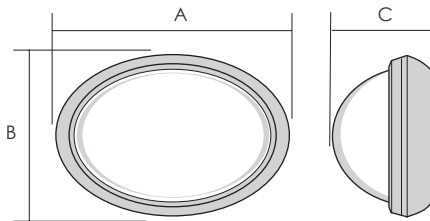

Size	C2L
A	276mm
B	190mm
C	125mm

### LED / Lamp Types

- 60W B22 GLS (lamp not included).
- 1 and 2 x 9W 4-Pin G23 Cap.
- 1 x 18W TC-D G24q-2.
- PLEASE NOTE – 60W E27 GLS (Lamp not included) also available.
- LED 600.

### Materials

- Body: Landscape/portrait orientation invandal resistant polycarbonate self-extinguishing fire properties in black / white / titanium. (plus halo backlight options).
- Fascia Ring: Vandal resistant polycarbonate with self-extinguishing fire properties.
- Diffuser: Vandal resistant polycarbonate clear/opal fresnel lens with self extinguishing fire properties.

### Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry. 3 way mains terminal block. 4 way terminal block for high frequency photocell version.
- Auto level Feature.
- Hinged front fascia retained by single screw.
- Screw down diffuser.
- Photocell version - external use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.
- 2 x Conduit entry points.

### Standards

- IP65.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

### Options

LED	Clarity Landscape Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy	PIR	Photocell	HI-LO PIR
LED 600	C2L/BLP4LED600	Black	Premium Opal	IP65	80	4000K	7.4W	517lm	66.3lm/W	✓	✓	✓

CFL	Clarity Landscape Code	Colour Finish	Diffuser	IP Rating	PIR	Photocell	HI-LO PIR
60W	C2L/BLP060	Black	Premium Opal	IP65	✓	✓	✓
9W HF	C2L/BLP009E	Black	Premium Opal	IP65	✓	✓	✓
2 X 9W HF	C2L/BLP2X9E	Black	Premium Opal	IP65	✓	✓	✓
18W HF	C2L/BLP118E	Black	Premium Opal	IP65	✓	✓	✓

### Code Options (Add suffix to code)



PIR  
P



HILO PIR  
HILO



Photocell  
C

### Fascia Options

Fascia Options	Change code
Eyelid	C2L/_ _ E
Louvre	C2L/_ _ L
Cage	C2L/_ _ C

### Diffuser Option

Diffuser Option	Change code
Fresnel	C2L/_ _ K