COACH LANTERN

LED | CFL

White
CL/**W**

Titanium
CL/**X**
*On Request

LED / Lamp Types
- LED 600.
- 13W TC-D.
- 18W TC-D.
- B22 GLS (Less lamp).
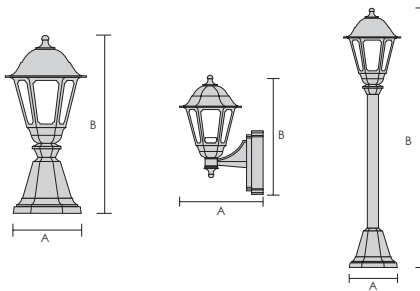- PLEASE NOTE - High Frequency versions are all 4-Pin.

Materials
- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white.
- Diffuser: Vandal resistant polycarbonate.

Installation
- Quick Fit connection.
- Optional Corner Bracket.
- Photocell outdoor use only.
- HI-LO PIR - 100% light output, dims to 10% during periods of inactivity.

Standards
- IP44.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class 2.

Size	Patio	Coach	Mini Column
A	170mm	273mm	170mm
B	480mm	417mm	859.5mm

Options

LED	Coach Lantern Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy	Photocell	PIR	HI-LO PIR
LED 600	CL/BK4LED600	Black	Premium Opal	IP44	80	4000K	7.4W	380lm	51lm/W	✓	✓	✓

CFL	Coach Lantern Code	Colour Finish	Diffuser	IP Rating	Photocell	PIR	HI-LO PIR
B22 GLS	CL/BK100	Black	Clear	IP44	✓	✓	
13W HF	CL/BK113E	Black	Clear	IP44	✓	✓	
18W HF	CL/BK118E	Black	Clear	IP44	✓	✓	

LED	Patio Coach Lantern Code	Colour Finish	Diffuser	IP Rating	CRI	CCT	System Power	Delivered Lumens	Efficacy	Photocell	PIR	HI-LO PIR
LED 600	CP/BK4LED600	Black	Premium Opal	IP44	80	4000K	7.4W	380lm	51lm/W			

CFL	Patio Coach Lantern Code	Colour Finish	Diffuser	IP Rating	Photocell	PIR	HI-LO PIR
B22 GLS	CP/BK100	Black	Clear	IP44			

CFL	Mini Column Coach Lantern Code	Colour Finish	Diffuser	IP Rating	Photocell	PIR	HI-LO PIR
B22 GLS	MC/BK100	Black	Clear	IP44			

Code Options (Add suffix to code)

PIR
P

HI-LO PIR
HILO

Photocell
C